# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665
2.90 GHz, AMD EPYC 7542

**SPECspeed®2017_fp_base = 170**

**SPECspeed®2017_fp_peak = 177**

**CPU2017 License:** 9017
**Test Sponsor:** Lenovo Global Technology
**Tested by:** Lenovo Global Technology

**Test Date:** Jul-2020
**Hardware Availability:** Jun-2020
**Software Availability:** Dec-2019

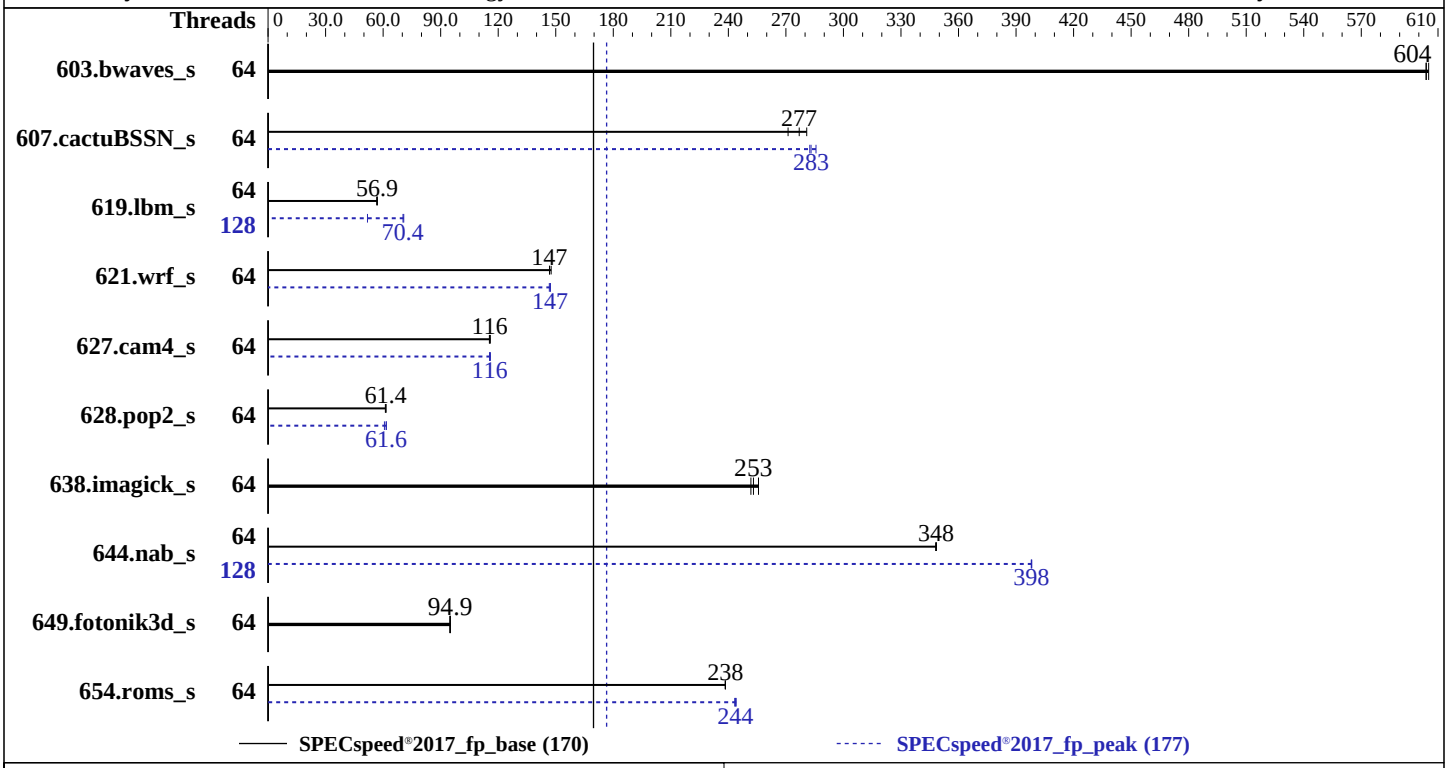


### Hardware

| | |
|---|---|
| CPU Name: | AMD EPYC 7542 |
| Max MHz: | 3400 |
| Nominal: | 2900 |
| Enabled: | 64 cores, 2 chips, 2 threads/core |
| Orderable: | 1,2 chips |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 512 KB I+D on chip per core |
| L3: | 128 MB I+D on chip per chip, 16 MB shared / 4 cores |
| Other: | None |
| Memory: | 1 TB (32 x 32 GB 2Rx8 PC4-3200AA-R) |
| Storage: | 1 x 960 GB SATA SSD |
| Other: | None |

### Software

| | |
|---|---|
| OS: | SUSE Linux Enterprise Server 12 SP5 (x86_64) Kernel 4.12.14-120-default |
| Compiler: | C/C++/Fortran: Version 2.0.0 of AOCC |
| Parallel: | Yes |
| Firmware: | Lenovo BIOS Version D8E105P 1.00 released May-2020 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | jemalloc: jemalloc memory allocator library v5.1.0 |
| Power Management: | BIOS set to prefer performance at the cost of additional power usage |

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 603.bwaves_s | 64 | 97.5 | 605 | 97.7 | 604 | **97.7** | **604** | 64 | 97.5 | 605 | 97.7 | 604 | **97.7** | **604** |
| 607.cactuBSSN_s | 64 | 61.5 | 271 | 59.4 | 281 | **60.2** | **277** | 64 | 58.3 | 286 | **58.9** | **283** | 59.0 | 282 |
| 619.lbm_s | 64 | **92.1** | **56.9** | 92.4 | 56.7 | 92.0 | 57.0 | 128 | 101 | 51.8 | 74.0 | 70.8 | **74.5** | **70.4** |
| 621.wrf_s | 64 | 89.6 | 148 | **90.1** | **147** | 90.1 | 147 | 64 | 89.9 | 147 | 90.2 | 147 | **89.9** | **147** |
| 627.cam4_s | 64 | 76.5 | 116 | **76.7** | **116** | 76.8 | 115 | 64 | 76.7 | 116 | 76.4 | 116 | **76.7** | **116** |
| 628.pop2_s | 64 | 194 | 61.2 | **193** | **61.4** | 193 | 61.5 | 64 | **193** | **61.6** | 193 | 61.6 | 196 | 60.7 |
| 638.imagick_s | 64 | 56.4 | 256 | 57.3 | 252 | **57.0** | **253** | 64 | 56.4 | 256 | 57.3 | 252 | **57.0** | **253** |
| 644.nab_s | 64 | 50.2 | 348 | **50.1** | **348** | 50.1 | 348 | 128 | 43.9 | 398 | **43.9** | **398** | 43.9 | 398 |
| 649.fotonik3d_s | 64 | 95.9 | 95.1 | **96.0** | **94.9** | 96.2 | 94.8 | 64 | 95.9 | 95.1 | **96.0** | **94.9** | 96.2 | 94.8 |
| 654.roms_s | 64 | 66.0 | 238 | **66.0** | **238** | 66.0 | 238 | 64 | **64.6** | **244** | 64.7 | 243 | 64.5 | 244 |

**SPECspeed®2017_fp_base = 170**

**SPECspeed®2017_fp_peak = 177**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

## Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

## Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-127"
LD_LIBRARY_PATH =
      "/home/cpu2017-1.1.0-amd-rome-aocc200-C3/amd_speed_aocc200_rome_C_lib/64
      ;/home/cpu2017-1.1.0-amd-rome-aocc200-C3/amd_speed_aocc200_rome_C_lib/32
      :"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "128"

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 619.lbm_s peak run:
GOMP_CPU_AFFINITY = "0 64 1 65 2 66 3 67 4 68 5 69 6 70 7 71 8 72 9 73 10 74
      11 75 12 76 13 77 14 78 15 79 16 80 17 81 18 82 19 83 20 84 21 85 22 86
      23 87 24 88 25 89 26 90 27 91 28 92 29 93 30 94 31 95 32 96 33 97 34 98
      35 99 36 100 37 101 38 102 39 103 40 104 41 105 42 106 43 107 44 108 45
      109 46 110 47 111 48 112 49 113 50 114 51 115 52 116 53 117 54 118 55
      119 56 120 57 121 58 122 59 123 60 124 61 125 62 126 63 127"

Environment variables set by runcpu during the 621.wrf_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 627.cam4_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 628.pop2_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 644.nab_s peak run:
GOMP_CPU_AFFINITY = "0 64 1 65 2 66 3 67 4 68 5 69 6 70 7 71 8 72 9 73 10 74
      11 75 12 76 13 77 14 78 15 79 16 80 17 81 18 82 19 83 20 84 21 85 22 86
      23 87 24 88 25 89 26 90 27 91 28 92 29 93 30 94 31 95 32 96 33 97 34 98
      35 99 36 100 37 101 38 102 39 103 40 104 41 105 42 106 43 107 44 108 45
      109 46 110 47 111 48 112 49 113 50 114 51 115 52 116 53 117 54 118 55
      119 56 120 57 121 58 122 59 123 60 124 61 125 62 126 63 127"

Environment variables set by runcpu during the 654.roms_s peak run:
GOMP_CPU_AFFINITY = "0-63"
```

## General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.1.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2
```

## Platform Notes

```
 BIOS settings:
 Choose Operating Mode set to Maximum Performance and then set it to Custom Mode
 Global C-state Control set to Disable
 NUMA nodes per socket set to NPS2
 SOC P-States set to P0

 Sysinfo program /home/cpu2017-1.1.0-amd-rome-aocc200-C3/bin/sysinfo
 Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
 running on linux-4l0h Fri Jul 17 20:27:12 2020

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD EPYC 7542 32-Core Processor
       2  "physical id"s (chips)
       128 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 32
       siblings  : 64
       physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31
       physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31

 From lscpu:
      Architecture:        x86_64
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      Address sizes:       43 bits physical, 48 bits virtual
      CPU(s):              128
      On-line CPU(s) list: 0-127
      Thread(s) per core:  2
      Core(s) per socket:  32
      Socket(s):           2
      NUMA node(s):        4
      Vendor ID:           AuthenticAMD
      CPU family:          23
      Model:               49
      Model name:          AMD EPYC 7542 32-Core Processor
      Stepping:            0
      CPU MHz:             2900.000
      CPU max MHz:         2900.0000
      CPU min MHz:         1500.0000
      BogoMIPS:            5788.92
      Virtualization:      AMD-V
      L1d cache:           32K
      L1i cache:           32K
      L2 cache:            512K
      L3 cache:            16384K
      NUMA node0 CPU(s):   0-15,64-79
      NUMA node1 CPU(s):   16-31,80-95
      NUMA node2 CPU(s):   32-47,96-111
      NUMA node3 CPU(s):   48-63,112-127
      Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
      constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
      monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm
      cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs
      skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb cat_l3
      cdp_l3 hw_pstate sme ssbd sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2
      cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
      cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd
      arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
      pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor
      smca

  /proc/cpuinfo cache data
     cache size : 512 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 4 nodes (0-3)
    node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 64 65 66 67 68 69 70 71 72 73 74 75
    76 77 78 79
    node 0 size: 257818 MB
```

**(Continued on next page)**

## Platform Notes (Continued)

```
   node 0 free: 257415 MB
   node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 80 81 82 83 84 85 86 87 88
   89 90 91 92 93 94 95
   node 1 size: 258028 MB
   node 1 free: 257618 MB
   node 2 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 96 97 98 99 100 101 102
   103 104 105 106 107 108 109 110 111
   node 2 size: 258040 MB
   node 2 free: 257821 MB
   node 3 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 112 113 114 115 116 117
   118 119 120 121 122 123 124 125 126 127
   node 3 size: 258039 MB
   node 3 free: 257838 MB
   node distances:
   node   0   1   2   3
     0:  10  12  32  32
     1:  12  10  32  32
     2:  32  32  10  12
     3:  32  32  12  10

 From /proc/meminfo
    MemTotal:       1056693748 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 5
       # This file is deprecated and will be removed in a future service pack or release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP5"
       VERSION_ID="12.5"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP5"
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp5"

 uname -a:
    Linux linux-4l0h 4.12.14-120-default #1 SMP Thu Nov 7 16:39:09 UTC 2019 (fd9dc36)
    x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:
```

**(Continued on next page)**

## Platform Notes (Continued)

```
 itlb_multihit:                          Not affected
 CVE-2018-3620 (L1 Terminal Fault):      Not affected
 Microarchitectural Data Sampling:       Not affected
 CVE-2017-5754 (Meltdown):               Not affected
 CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                          via prctl and seccomp
 CVE-2017-5753 (Spectre variant 1):      Mitigation: usercopy/swapgs barriers and __user
                                          pointer sanitization
 CVE-2017-5715 (Spectre variant 2):       Mitigation: Full AMD retpoline, IBPB:
                                         conditional, IBRS_FW, STIBP: conditional, RSB
                                          filling
 tsx_async_abort:                        Not affected

 run-level 3 Jul 17 20:04

 SPEC is set to: /home/cpu2017-1.1.0-amd-rome-aocc200-C3
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda2      xfs   893G   36G  858G   4% /

 From /sys/devices/virtual/dmi/id
     BIOS:    Lenovo D8E105P-1.00 05/08/2020
     Vendor:  Lenovo
     Product: ThinkSystem SR665 MB
     Product Family: ThinkSystem
     Serial:  1234567890

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     32x Samsung M393A4G43AB3-CWE 32 kB 2 rank 3200

 (End of data from sysinfo program)
This system support 16 DIMMs per processor, total 32 DIMMs.
32 DIMM slots installed with 32 GB DIMM for this run.
```

## Compiler Version Notes

```
==============================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
                | 644.nab_s(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                | 654.roms_s(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                | 628.pop2_s(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

## Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000

**(Continued on next page)**

## Base Optimization Flags (Continued)

C benchmarks (continued):
-flv-function-specialization -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang

Fortran benchmarks:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp -fopenmp=libomp
-lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc -lflang

Benchmarks using both Fortran and C:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp -fopenmp=libomp
-lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc -lflang

Benchmarks using Fortran, C, and C++:
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lpthread -ldl -lmvec
-lamdlibm -ljemalloc -lflang

## Base Other Flags

C benchmarks:
-Wno-return-type

**(Continued on next page)**

## Base Other Flags (Continued)

Fortran benchmarks:
-Wno-return-type

Benchmarks using both Fortran and C:
-Wno-return-type

Benchmarks using Fortran, C, and C++:
-Wno-return-type

## Peak Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist

**(Continued on next page)**

## Peak Optimization Flags (Continued)

619.lbm_s (continued):
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-lmvec -lamdlibm -fopenmp=libomp -lomp -lpthread -ldl
-ljemalloc -lflang

638.imagick_s: basepeak = yes

644.nab_s: Same as 619.lbm_s

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: basepeak = yes

654.roms_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang

Benchmarks using both Fortran and C:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -O3 -funroll-loops -Mrecursive -Kieee
-fno-finite-math-only -DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp
-lpthread -ldl -lmvec -lamdlibm -ljemalloc -lflang

Benchmarks using Fortran, C, and C++:
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2

**(Continued on next page)**

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):
-mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch -mllvm -loop-unswitch-threshold=200000
-O3 -funroll-loops -Mrecursive -Kieee -fno-finite-math-only
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lpthread -ldl -lmvec
-lamdlibm -ljemalloc -lflang

## Peak Other Flags

C benchmarks:
-Wno-return-type

Fortran benchmarks:
-Wno-return-type

Benchmarks using both Fortran and C:
-Wno-return-type

Benchmarks using Fortran, C, and C++:
-Wno-return-type

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc200-flags-C3.html
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Rome2P-K.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc200-flags-C3.xml
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Rome2P-K.xml


SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.


Tested with SPEC CPU®2017 v1.1.0 on 2020-07-17 08:27:11-0400.
Report generated on 2020-08-04 14:39:59 by CPU2017 PS formatter v6255.
Originally published on 2020-08-04.