SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R840 (Intel Xeon Gold 6252N, 2.30 GHz)

SPECrate®2017_int_base = 571

SPECrate®2017_int_peak = 592

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jul-2020
Hardware Availability: Sep-2019
Software Availability: May-2020

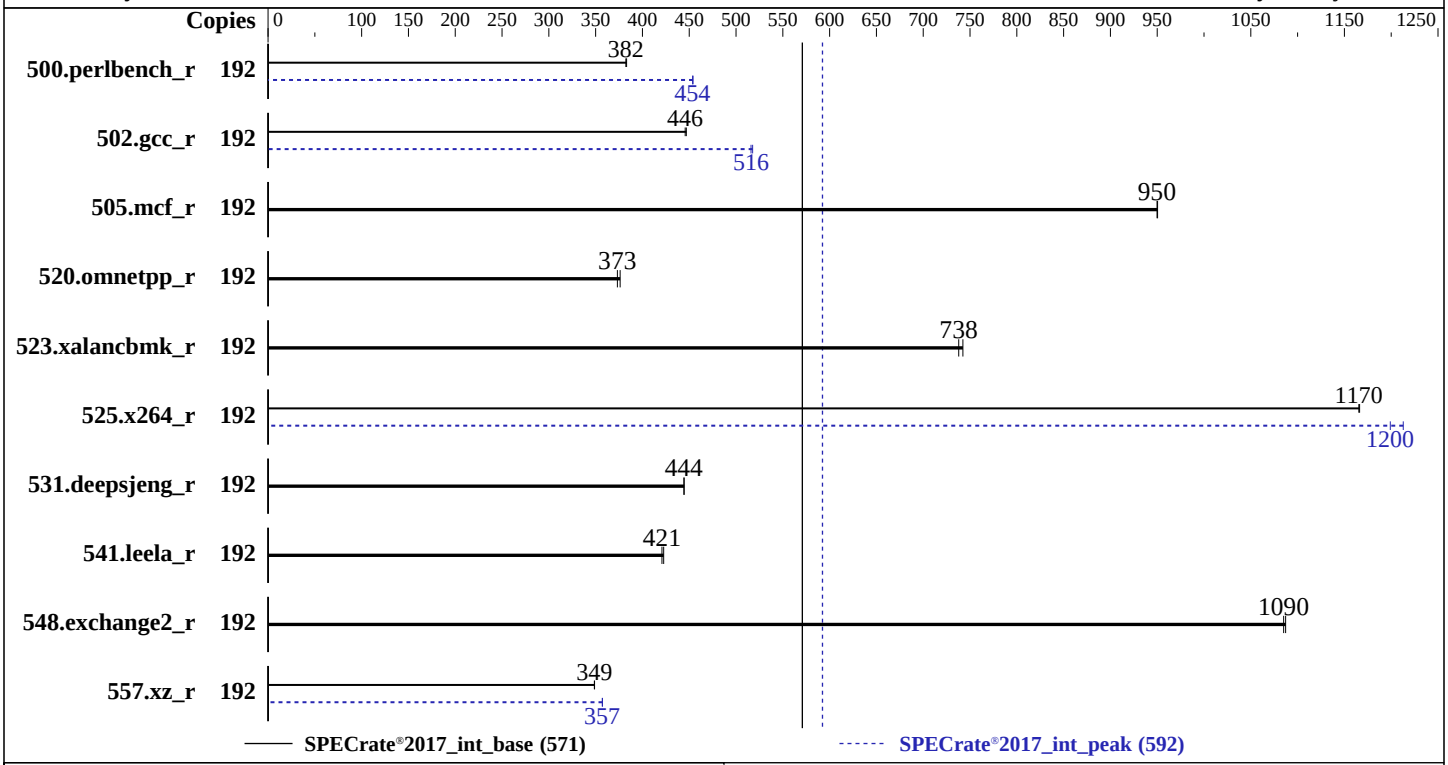

Hardware

CPU Name:	Intel Xeon Gold 6252N
Max MHz:	3600
Nominal:	2300
Enabled:	96 cores, 4 chips, 2 threads/core
Orderable:	2,4 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	35.75 MB I+D on chip per chip
Other:	None
Memory:	1536 GB (48 x 32 GB 2Rx4 PC4-3200AA-R, running at 2933)
Storage:	1 x 1.6 TB SATA SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux 8.2 kernel 4.18.0-193.1.2.el8_2.x86_64
Compiler:	C/C++: Version 19.1.1.217 of Intel C/C++ Compiler for Linux; Fortran: Version 19.1.1.217 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Version 2.8.1 released Jun-2020
File System:	tmpfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	None jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R840 (Intel Xeon Gold 6252N, 2.30 GHz)

SPECrate®2017_int_base = 571

SPECrate®2017_int_peak = 592

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jul-2020
Hardware Availability: Sep-2019
Software Availability: May-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	798	383	**800**	**382**			192	673	454	**674**	**454**		
502.gcc_r	192	**610**	**446**	608	447			192	525	518	**527**	**516**		
505.mcf_r	192	**327**	**950**	326	950			192	**327**	**950**	326	950		
520.omnetpp_r	192	670	376	**675**	**373**			192	670	376	**675**	**373**		
523.xalancbmk_r	192	273	742	**275**	**738**			192	273	742	**275**	**738**		
525.x264_r	192	288	1170	**288**	**1170**			192	277	1210	**280**	**1200**		
531.deepsjeng_r	192	495	445	**495**	**444**			192	495	445	**495**	**444**		
541.leela_r	192	752	423	**755**	**421**			192	752	423	**755**	**421**		
548.exchange2_r	192	**464**	**1090**	463	1090			192	**464**	**1090**	463	1090		
557.xz_r	192	594	349	**595**	**349**			192	580	357	**581**	**357**		

SPECrate®2017_int_base = 571

SPECrate®2017_int_peak = 592

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler.
The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux
```

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/mnt/ramdisk/cpu2017-ic19.1u1/lib/intel64:/mnt/ramdisk/cpu2017-ic19.1u1
     /lib/ia32:/mnt/ramdisk/cpu2017-ic19.1u1/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Redhat Enterprise Linux 8.0
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
Benchmark run from a 225 GB ramdisk created with the cmd; "mount -t tmpfs -o size=225G tmpfs /mnt/ramdisk"
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS settings:
Sub NUMA Cluster enabled
Virtualization Technology disabled
DCU Streamer Prefetcher disabled
System Profile set to Custom
CPU Performance set to Maximum Performance
C States set to Autonomous
C1E disabled
Uncore Frequency set to Dynamic
Energy Efficiency Policy set to Performance
Memory Patrol Scrub set to standard
Logical Processor enabled
CPU Interconnect Bus Link Power Management disabled
PCI ASPM L1 Link Power Management disabled
UPI Prefetch enabled
LLC Prefetch disabled
Dead Line LLC Alloc enabled
Directory AtoS disabled

Sysinfo program /mnt/ramdisk/cpu2017-ic19.1u1/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on poweredge-sut-rhel8-1 Wed Jul 22 07:22:09 2020

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
```

(Continued on next page)

Platform Notes (Continued)

```
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

  From /proc/cpuinfo
     model name : Intel(R) Xeon(R) Gold 6252N CPU @ 2.30GHz
        4  "physical id"s (chips)
        192 "processors"
     cores, siblings (Caution: counting these is hw and system dependent. The following
     excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
        cpu cores : 24
        siblings  : 48
        physical 0: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
        physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
        physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
        physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29

  From lscpu:
       Architecture:        x86_64
       CPU op-mode(s):      32-bit, 64-bit
       Byte Order:          Little Endian
       CPU(s):              192
       On-line CPU(s) list: 0-191
       Thread(s) per core:  2
       Core(s) per socket:  24
       Socket(s):           4
       NUMA node(s):        8
       Vendor ID:           GenuineIntel
       CPU family:          6
       Model:               85
       Model name:          Intel(R) Xeon(R) Gold 6252N CPU @ 2.30GHz
       Stepping:            7
       CPU MHz:             3096.066
       CPU max MHz:         3600.0000
       CPU min MHz:         1000.0000
       BogoMIPS:            4600.00
       Virtualization:      VT-x
       L1d cache:           32K
       L1i cache:           32K
       L2 cache:            1024K
       L3 cache:            36608K
       NUMA node0 CPU(s):
       0,8,16,24,32,40,48,56,64,72,80,88,96,104,112,120,128,136,144,152,160,168,176,184
       NUMA node1 CPU(s):
       1,9,17,25,33,41,49,57,65,73,81,89,97,105,113,121,129,137,145,153,161,169,177,185
       NUMA node2 CPU(s):
       2,10,18,26,34,42,50,58,66,74,82,90,98,106,114,122,130,138,146,154,162,170,178,186
       NUMA node3 CPU(s):
       3,11,19,27,35,43,51,59,67,75,83,91,99,107,115,123,131,139,147,155,163,171,179,187
```

(Continued on next page)

Platform Notes (Continued)

```
      NUMA node4 CPU(s):
      4,12,20,28,36,44,52,60,68,76,84,92,100,108,116,124,132,140,148,156,164,172,180,188
      NUMA node5 CPU(s):
      5,13,21,29,37,45,53,61,69,77,85,93,101,109,117,125,133,141,149,157,165,173,181,189
      NUMA node6 CPU(s):
      6,14,22,30,38,46,54,62,70,78,86,94,102,110,118,126,134,142,150,158,166,174,182,190
      NUMA node7 CPU(s):
      7,15,23,31,39,47,55,63,71,79,87,95,103,111,119,127,135,143,151,159,167,175,183,191
      Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
      invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
      flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
      cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
      avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
      cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d
      arch_capabilities

 /proc/cpuinfo cache data
    cache size : 36608 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 8 nodes (0-7)
   node 0 cpus: 0 8 16 24 32 40 48 56 64 72 80 88 96 104 112 120 128 136 144 152 160 168
   176 184
   node 0 size: 191908 MB
   node 0 free: 191492 MB
   node 1 cpus: 1 9 17 25 33 41 49 57 65 73 81 89 97 105 113 121 129 137 145 153 161 169
   177 185
   node 1 size: 193530 MB
   node 1 free: 193392 MB
   node 2 cpus: 2 10 18 26 34 42 50 58 66 74 82 90 98 106 114 122 130 138 146 154 162 170
   178 186
   node 2 size: 193530 MB
   node 2 free: 193398 MB
   node 3 cpus: 3 11 19 27 35 43 51 59 67 75 83 91 99 107 115 123 131 139 147 155 163 171
   179 187
   node 3 size: 193503 MB
   node 3 free: 184145 MB
   node 4 cpus: 4 12 20 28 36 44 52 60 68 76 84 92 100 108 116 124 132 140 148 156 164 172
   180 188
   node 4 size: 193530 MB
   node 4 free: 193248 MB
```

(Continued on next page)

Platform Notes (Continued)

```
   node 5 cpus: 5 13 21 29 37 45 53 61 69 77 85 93 101 109 117 125 133 141 149 157 165 173
   181 189
   node 5 size: 193530 MB
   node 5 free: 193390 MB
   node 6 cpus: 6 14 22 30 38 46 54 62 70 78 86 94 102 110 118 126 134 142 150 158 166 174
   182 190
   node 6 size: 193530 MB
   node 6 free: 193396 MB
   node 7 cpus: 7 15 23 31 39 47 55 63 71 79 87 95 103 111 119 127 135 143 151 159 167 175
   183 191
   node 7 size: 193528 MB
   node 7 free: 193336 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  21  21  21  11  21  21  21
     1:  21  10  21  21  21  11  21  21
     2:  21  21  10  21  21  21  11  21
     3:  21  21  21  10  21  21  21  11
     4:  11  21  21  21  10  21  21  21
     5:  21  11  21  21  21  10  21  21
     6:  21  21  11  21  21  21  10  21
     7:  21  21  21  11  21  21  21  10

 From /proc/meminfo
    MemTotal:       1583710104 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    os-release:
       NAME="Red Hat Enterprise Linux"
       VERSION="8.2 (Ootpa)"
       ID="rhel"
       ID_LIKE="fedora"
       VERSION_ID="8.2"
       PLATFORM_ID="platform:el8"
       PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
       ANSI_COLOR="0;31"
    redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
    system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga

 uname -a:
    Linux poweredge-sut-rhel8-1 4.18.0-193.1.2.el8_2.x86_64 #1 SMP Thu May 7 16:37:54 UTC
    2020 x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:
```

(Continued on next page)

Platform Notes (Continued)

```
 itlb_multihit:                          KVM: Vulnerable
 CVE-2018-3620 (L1 Terminal Fault):      Not affected
 Microarchitectural Data Sampling:       Not affected
 CVE-2017-5754 (Meltdown):               Not affected
 CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                          via prctl and seccomp
 CVE-2017-5753 (Spectre variant 1):      Mitigation: usercopy/swapgs barriers and __user
                                          pointer sanitization
 CVE-2017-5715 (Spectre variant 2):      Mitigation: Enhanced IBRS, IBPB: conditional,
                                          RSB filling
 tsx_async_abort:                        Mitigation: Clear CPU buffers; SMT vulnerable

 run-level 3 Jul 22 07:20 last=5

 SPEC is set to: /mnt/ramdisk/cpu2017-ic19.1u1
    Filesystem     Type   Size  Used Avail Use% Mounted on
    tmpfs          tmpfs  225G  4.2G  221G   2% /mnt/ramdisk

 From /sys/devices/virtual/dmi/id
     BIOS:    Dell Inc. 2.8.1 06/29/2020
     Vendor:  Dell Inc.
     Product: PowerEdge R840
     Product Family: PowerEdge
     Serial:  H8BMXM2

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     2x 002C00B3002C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200
     24x 002C00B3002C 36ASF4G72PZ-3G2E7 32 GB 2 rank 3200
     3x 002C0632002C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200
     1x 002C069D002C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200
     6x 002C069D002C 36ASF4G72PZ-3G2E7 32 GB 2 rank 3200
     12x 00AD063200AD HMA84GR7CJR4N-XN 32 GB 2 rank 3200

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen
```

(Continued on next page)

Compiler Version Notes (Continued)

```
  Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base)
------------------------------------------------------------------------------
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(peak) 557.xz_r(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen
  Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base)
------------------------------------------------------------------------------
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(peak) 557.xz_r(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen
  Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base)
------------------------------------------------------------------------------
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(peak) 557.xz_r(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc

(Continued on next page)

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-fuse-ld=gold -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse
-funroll-loops -fuse-ld=gold -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc

Fortran benchmarks:
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks (continued):
-lqkmalloc

Peak Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/ia32_lin

(Continued on next page)

Peak Optimization Flags (Continued)

502.gcc_r (continued):
-std=gnu89
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qnextgen -fuse-ld=gold
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib
-ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX512 -flto -O3 -ffast-math
-fuse-ld=gold -qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.html
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE12.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.xml
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE12.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-07-22 08:22:08-0400.
Report generated on 2020-08-18 14:40:34 by CPU2017 PS formatter v6255.
Originally published on 2020-08-18.