SPEC CPU®2017 Floating Point Rate Result

Supermicro

SuperServer SYS-240P-TNRT
(X12QCH+ , Intel Xeon Gold 6348H)

SPECrate®2017_fp_base = 475

SPECrate®2017_fp_peak = 502

CPU2017 License:	001176	**Test Date:**	Oct-2020
Test Sponsor:	Supermicro	**Hardware Availability:**	Sep-2020
Tested by:	Supermicro	**Software Availability:**	Apr-2020

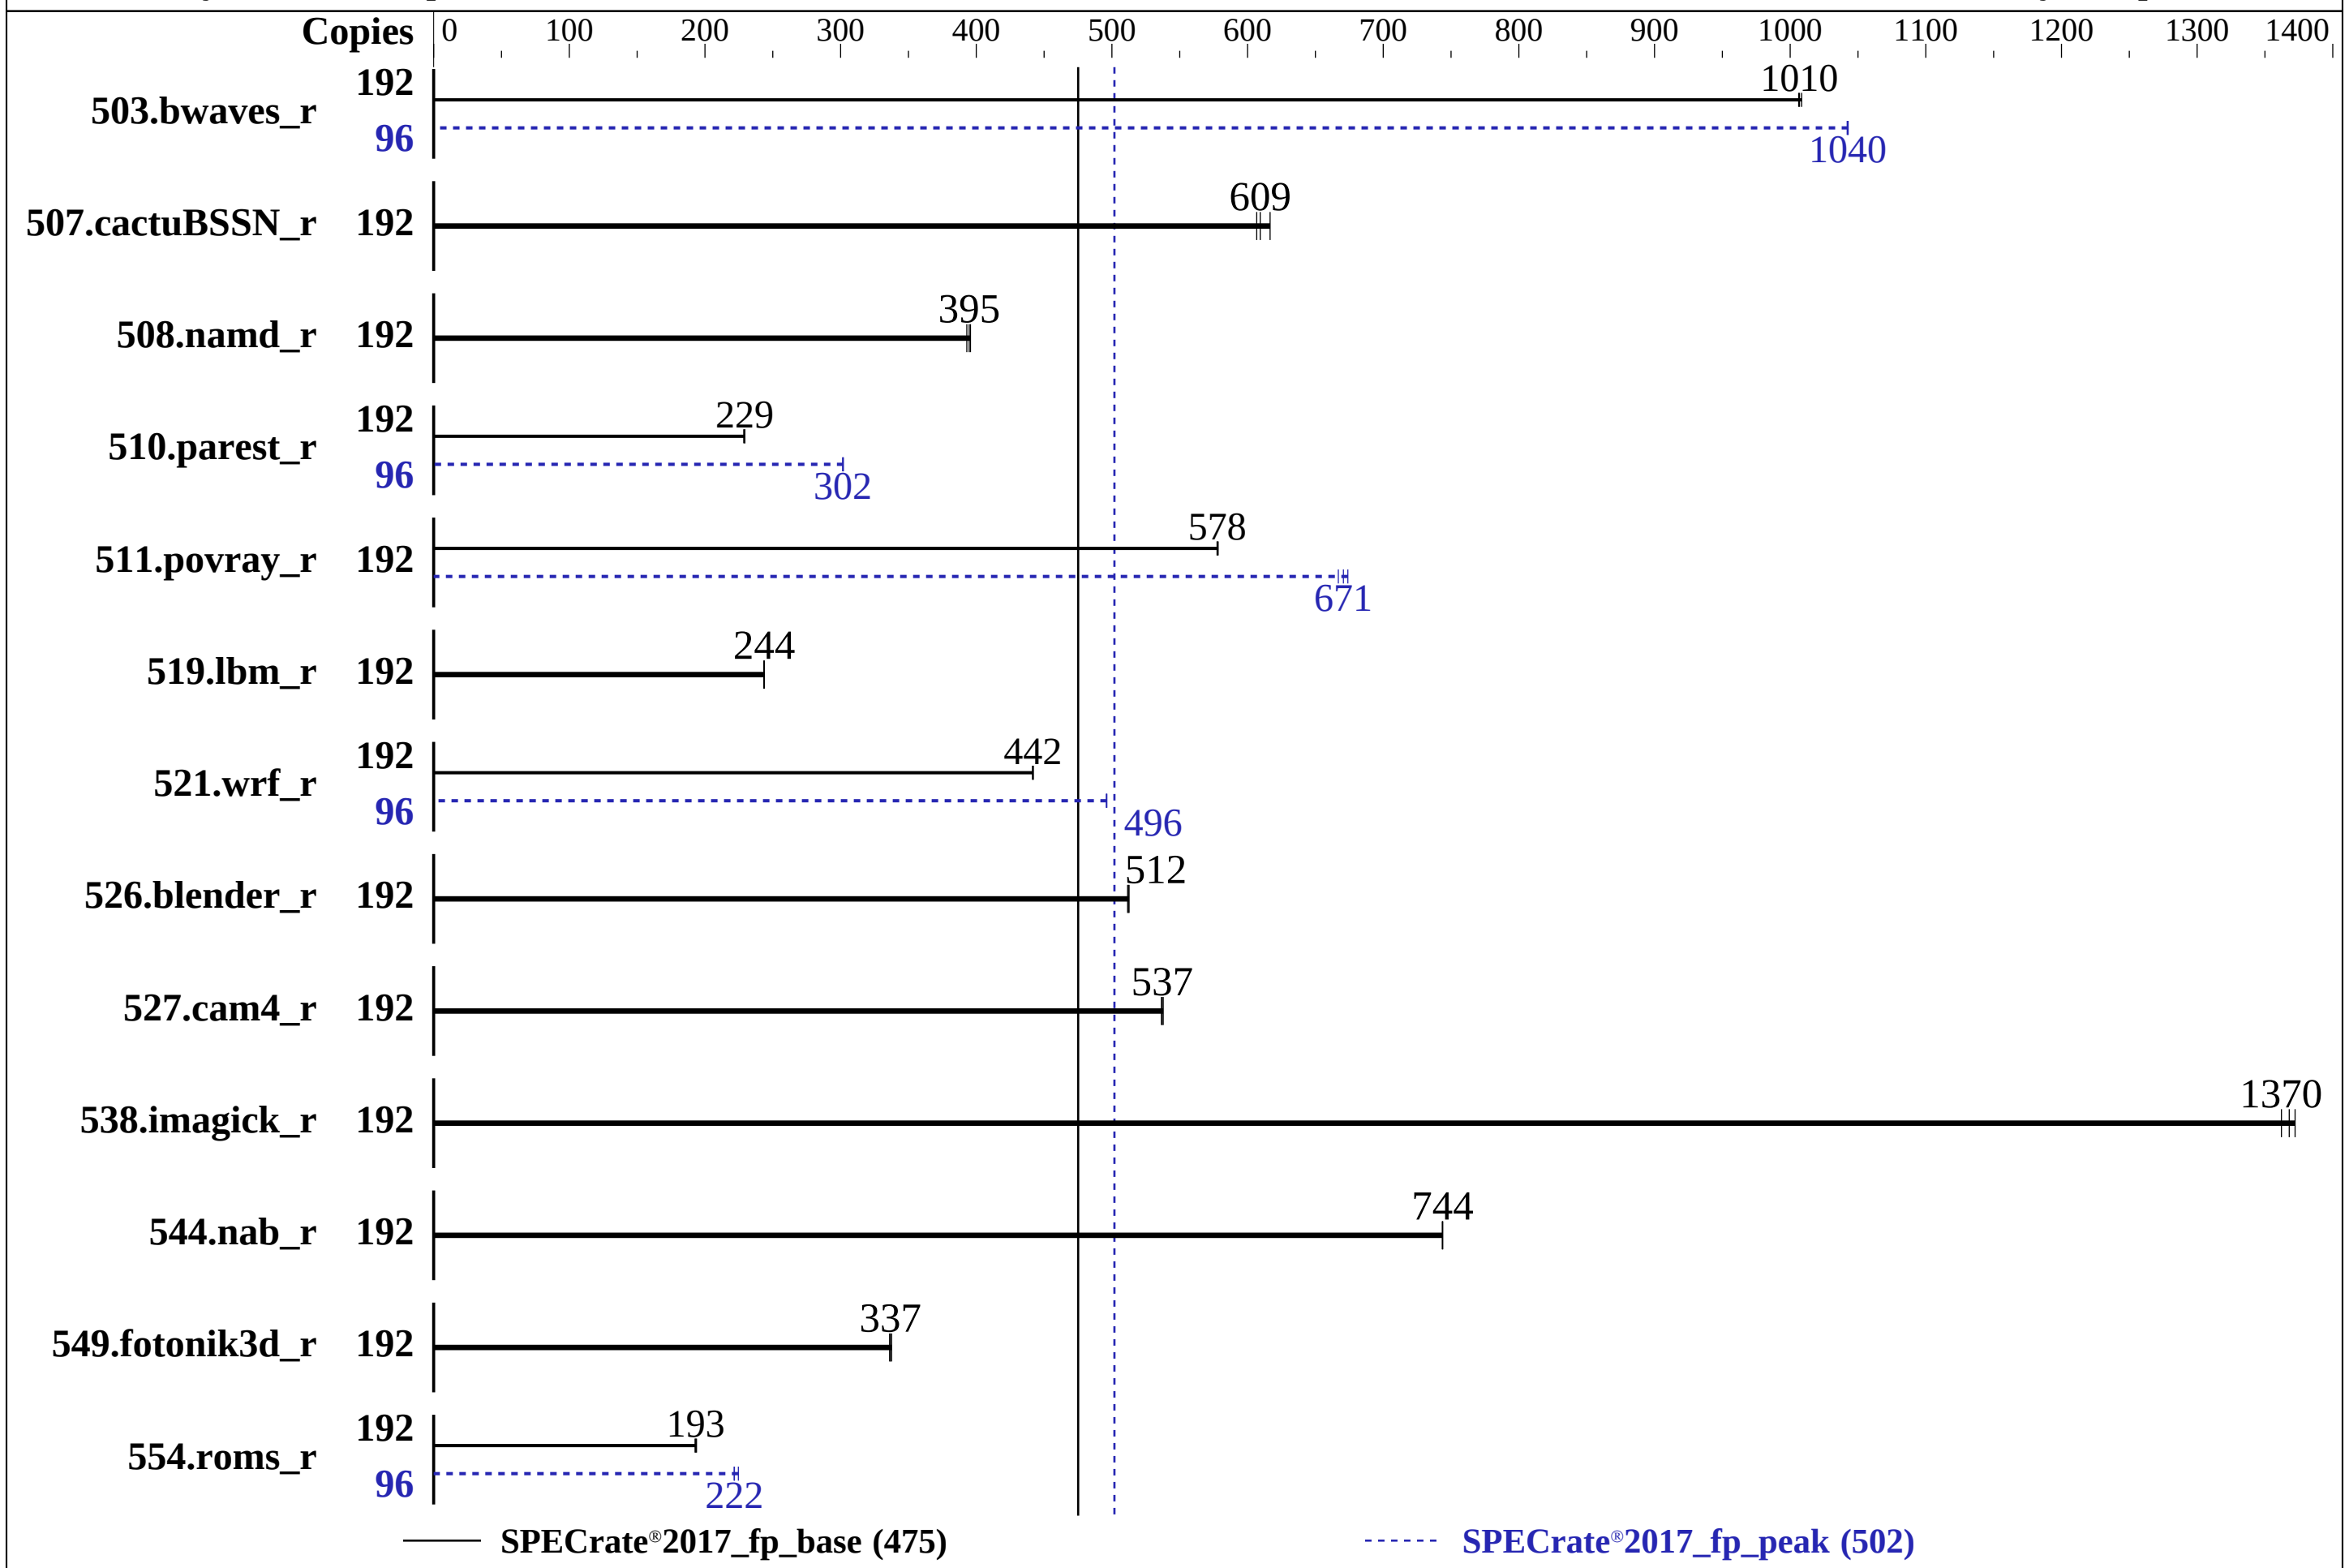

Hardware

CPU Name:	Intel Xeon Gold 6348H
Max MHz:	4200
Nominal:	2300
Enabled:	96 cores, 4 chips, 2 threads/core
Orderable:	1,2,4 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	33 MB I+D on chip per chip
Other:	None
Memory:	1536 GB (48 x 32 GB 2Rx4 PC4-3200AA-R, running at 2933)
Storage:	1 x 200 GB SATA III SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux 8.2 Kernel 4.18.0-193.el8.x86_64
Compiler:	C/C++: Version 19.1.1.217 of Intel C/C++ Compiler for Linux; Fortran: Version 19.1.1.217 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Version 1.0 released Sep-2020
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Floating Point Rate Result

Supermicro

SuperServer SYS-240P-TNRT
(X12QCH+ , Intel Xeon Gold 6348H)

SPECrate®2017_fp_base = 475

SPECrate®2017_fp_peak = 502

CPU2017 License: 001176		**Test Date:**	Oct-2020
Test Sponsor:	Supermicro	**Hardware Availability:**	Sep-2020
Tested by:	Supermicro	**Software Availability:**	Apr-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	192	1913	1010	1909	1010	**1912**	**1010**	96	924	1040	**923**	**1040**	923	1040
507.cactuBSSN_r	192	394	617	**399**	**609**	401	607	192	394	617	**399**	**609**	401	607
508.namd_r	192	461	396	**462**	**395**	464	393	192	461	396	**462**	**395**	464	393
510.parest_r	192	2190	229	2197	229	**2191**	**229**	96	831	302	**832**	**302**	833	301
511.povray_r	192	**776**	**578**	775	578	776	578	192	665	674	**668**	**671**	672	667
519.lbm_r	192	830	244	831	243	**831**	**244**	192	830	244	831	243	**831**	**244**
521.wrf_r	192	974	441	**973**	**442**	973	442	96	433	496	434	496	**434**	**496**
526.blender_r	192	570	513	**571**	**512**	572	512	192	570	513	**571**	**512**	572	512
527.cam4_r	192	**625**	**537**	624	538	626	536	192	**625**	**537**	624	538	626	536
538.imagick_r	192	351	1360	348	1370	**349**	**1370**	192	351	1360	348	1370	**349**	**1370**
544.nab_r	192	434	744	435	744	**434**	**744**	192	434	744	435	744	**434**	**744**
549.fotonik3d_r	192	2216	338	2226	336	**2222**	**337**	192	2216	338	2226	336	**2222**	**337**
554.roms_r	192	**1579**	**193**	1575	194	1583	193	96	689	222	**688**	**222**	679	225

SPECrate®2017_fp_base = **475**

SPECrate®2017_fp_peak = **502**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler.
The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux
```

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Settings:
Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Maximum Performance
SNC = Enable
Stale AtoS = Disable
Patrol Scrub = Disable

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on X12QCH-01 Thu Oct  1 11:56:09 2020

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Gold 6348H CPU @ 2.30GHz
      4  "physical id"s (chips)
      192 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 24
      siblings  : 48
      physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
```

(Continued on next page)

Platform Notes (Continued)

```
        physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
        physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
        physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

  From lscpu:
       Architecture:        x86_64
       CPU op-mode(s):      32-bit, 64-bit
       Byte Order:          Little Endian
       CPU(s):              192
       On-line CPU(s) list: 0-191
       Thread(s) per core:  2
       Core(s) per socket:  24
       Socket(s):           4
       NUMA node(s):        8
       Vendor ID:           GenuineIntel
       CPU family:          6
       Model:               85
       Model name:          Intel(R) Xeon(R) Gold 6348H CPU @ 2.30GHz
       Stepping:            11
       CPU MHz:             3431.777
       CPU max MHz:         4200.0000
       CPU min MHz:         1000.0000
       BogoMIPS:            4600.00
       Virtualization:      VT-x
       L1d cache:           32K
       L1i cache:           32K
       L2 cache:            1024K
       L3 cache:            33792K
       NUMA node0 CPU(s):   0-2,6-8,12-14,18-20,96-98,102-104,108-110,114-116
       NUMA node1 CPU(s):   3-5,9-11,15-17,21-23,99-101,105-107,111-113,117-119
       NUMA node2 CPU(s):   24-26,30-32,36-38,42-44,120-122,126-128,132-134,138-140
       NUMA node3 CPU(s):   27-29,33-35,39-41,45-47,123-125,129-131,135-137,141-143
       NUMA node4 CPU(s):   48-50,54-56,60-62,66-68,144-146,150-152,156-158,162-164
       NUMA node5 CPU(s):   51-53,57-59,63-65,69-71,147-149,153-155,159-161,165-167
       NUMA node6 CPU(s):   72-74,78-80,84-86,90-92,168-170,174-176,180-182,186-188
       NUMA node7 CPU(s):   75-77,81-83,87-89,93-95,171-173,177-179,183-185,189-191
       Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
       pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
       lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
       aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
       xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
       avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
       invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
       flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
       cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
       avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
       cqm_mbm_local avx512_bf16 dtherm ida arat pln pts pku ospke avx512_vnni md_clear
```


(Continued on next page)

Platform Notes (Continued)

```
      flush_l1d arch_capabilities

 /proc/cpuinfo cache data
    cache size : 33792 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 8 nodes (0-7)
   node 0 cpus: 0 1 2 6 7 8 12 13 14 18 19 20 96 97 98 102 103 104 108 109 110 114 115 116
   node 0 size: 192070 MB
   node 0 free: 178556 MB
   node 1 cpus: 3 4 5 9 10 11 15 16 17 21 22 23 99 100 101 105 106 107 111 112 113 117 118
   119
   node 1 size: 193530 MB
   node 1 free: 184354 MB
   node 2 cpus: 24 25 26 30 31 32 36 37 38 42 43 44 120 121 122 126 127 128 132 133 134
   138 139 140
   node 2 size: 193530 MB
   node 2 free: 184416 MB
   node 3 cpus: 27 28 29 33 34 35 39 40 41 45 46 47 123 124 125 129 130 131 135 136 137
   141 142 143
   node 3 size: 193530 MB
   node 3 free: 184315 MB
   node 4 cpus: 48 49 50 54 55 56 60 61 62 66 67 68 144 145 146 150 151 152 156 157 158
   162 163 164
   node 4 size: 193530 MB
   node 4 free: 184444 MB
   node 5 cpus: 51 52 53 57 58 59 63 64 65 69 70 71 147 148 149 153 154 155 159 160 161
   165 166 167
   node 5 size: 193503 MB
   node 5 free: 184410 MB
   node 6 cpus: 72 73 74 78 79 80 84 85 86 90 91 92 168 169 170 174 175 176 180 181 182
   186 187 188
   node 6 size: 193530 MB
   node 6 free: 184411 MB
   node 7 cpus: 75 76 77 81 82 83 87 88 89 93 94 95 171 172 173 177 178 179 183 184 185
   189 190 191
   node 7 size: 193528 MB
   node 7 free: 183082 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  11  20  20  20  20  20  20
     1:  11  10  20  20  20  20  20  20
     2:  20  20  10  11  20  20  20  20
     3:  20  20  11  10  20  20  20  20
     4:  20  20  20  20  10  11  20  20
     5:  20  20  20  20  11  10  20  20
```

(Continued on next page)

Platform Notes (Continued)

```
     6:  20  20  20  20  20  20  10  11
     7:  20  20  20  20  20  20  11  10

 From /proc/meminfo
    MemTotal:       1583876676 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    os-release:
       NAME="Red Hat Enterprise Linux"
       VERSION="8.2 (Ootpa)"
       ID="rhel"
       ID_LIKE="fedora"
       VERSION_ID="8.2"
       PLATFORM_ID="platform:el8"
       PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
       ANSI_COLOR="0;31"
    redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
    system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga

 uname -a:
    Linux X12QCH-01 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020 x86_64
    x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 itlb_multihit:                               Not affected
 CVE-2018-3620 (L1 Terminal Fault):           Not affected
 Microarchitectural Data Sampling:            Not affected
 CVE-2017-5754 (Meltdown):                    Not affected
 CVE-2018-3639 (Speculative Store Bypass):   Mitigation: Speculative Store Bypass disabled
                                              via prctl and seccomp
 CVE-2017-5753 (Spectre variant 1):          Mitigation: usercopy/swapgs barriers and __user
                                             pointer sanitization
 CVE-2017-5715 (Spectre variant 2):          Mitigation: Enhanced IBRS, IBPB: conditional,
                                              RSB filling
 tsx_async_abort:                             Not affected

 run-level 3 Oct 1 02:42

 SPEC is set to: /home/cpu2017
    Filesystem            Type  Size  Used Avail Use% Mounted on
    /dev/mapper/rhel-home xfs   125G   84G   42G  67% /home

 From /sys/devices/virtual/dmi/id
```

(Continued on next page)

Platform Notes (Continued)

```
     BIOS:    American Megatrends International, LLC. 1.0 09/02/2020
     Vendor:  Supermicro
     Product: Super Server
     Product Family: Family
     Serial:  0123456789

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     48x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
C++, C          | 511.povray_r(peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------


==============================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------


==============================================================================
Fortran, C      | 521.wrf_r(peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------


==============================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------


==============================================================================
Fortran, C      | 521.wrf_r(peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`ifort icc`

Benchmarks using both C and C++:
`icpc icc`

Benchmarks using Fortran, C, and C++:
`icpc icc ifort`

Base Portability Flags

503.bwaves_r: `-DSPEC_LP64`
507.cactuBSSN_r: `-DSPEC_LP64`
508.namd_r: `-DSPEC_LP64`
510.parest_r: `-DSPEC_LP64`
511.povray_r: `-DSPEC_LP64`
519.lbm_r: `-DSPEC_LP64`
521.wrf_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian`
526.blender_r: `-DSPEC_LP64 -DSPEC_LINUX -funsigned-char`
527.cam4_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG`
538.imagick_r: `-DSPEC_LP64`
544.nab_r: `-DSPEC_LP64`
549.fotonik3d_r: `-DSPEC_LP64`
554.roms_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:
```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX2 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:
```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX2 -O3 -ipo -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:
```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both C and C++:
```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:
```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
```

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):
`-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

Peak Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`ifort icc`

Benchmarks using both C and C++:
`icpc icc`

Benchmarks using Fortran, C, and C++:
`icpc icc ifort`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

519.lbm_r: `basepeak = yes`

538.imagick_r: `basepeak = yes`

544.nab_r: `basepeak = yes`

C++ benchmarks:

(Continued on next page)

Peak Optimization Flags (Continued)

508.namd_r: `basepeak = yes`

510.parest_r: `-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

Fortran benchmarks:

503.bwaves_r: `-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX2 -O3 -ipo -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -mbranches-within-32B-boundaries -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

549.fotonik3d_r: `basepeak = yes`

554.roms_r: `Same as 503.bwaves_r`

Benchmarks using both Fortran and C:

521.wrf_r: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2 -O3 -ipo -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries -nostandard-realloc-lhs -align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

527.cam4_r: `basepeak = yes`

Benchmarks using both C and C++:

511.povray_r: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2 -O3 -ipo -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

526.blender_r: `basepeak = yes`

Benchmarks using Fortran, C, and C++:

(Continued on next page)

Peak Optimization Flags (Continued)

507.cactuBSSN_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.html
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revG.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.xml
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revG.xml

Tested with SPEC CPU®2017 v1.1.0 on 2020-09-30 23:56:09-0400.
Report generated on 2020-10-27 16:16:20 by CPU2017 PS formatter v6255.
Originally published on 2020-10-27.