# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-240P-TNRT
(X12QCH+ , Intel Xeon Gold 6348H)

SPECspeed®2017_int_base = 12.0

SPECspeed®2017_int_peak = 12.3

**CPU2017 License:** 001176
**Test Sponsor:** Supermicro
**Tested by:** Supermicro

**Test Date:** Oct-2020
**Hardware Availability:** Sep-2020
**Software Availability:** Apr-2020

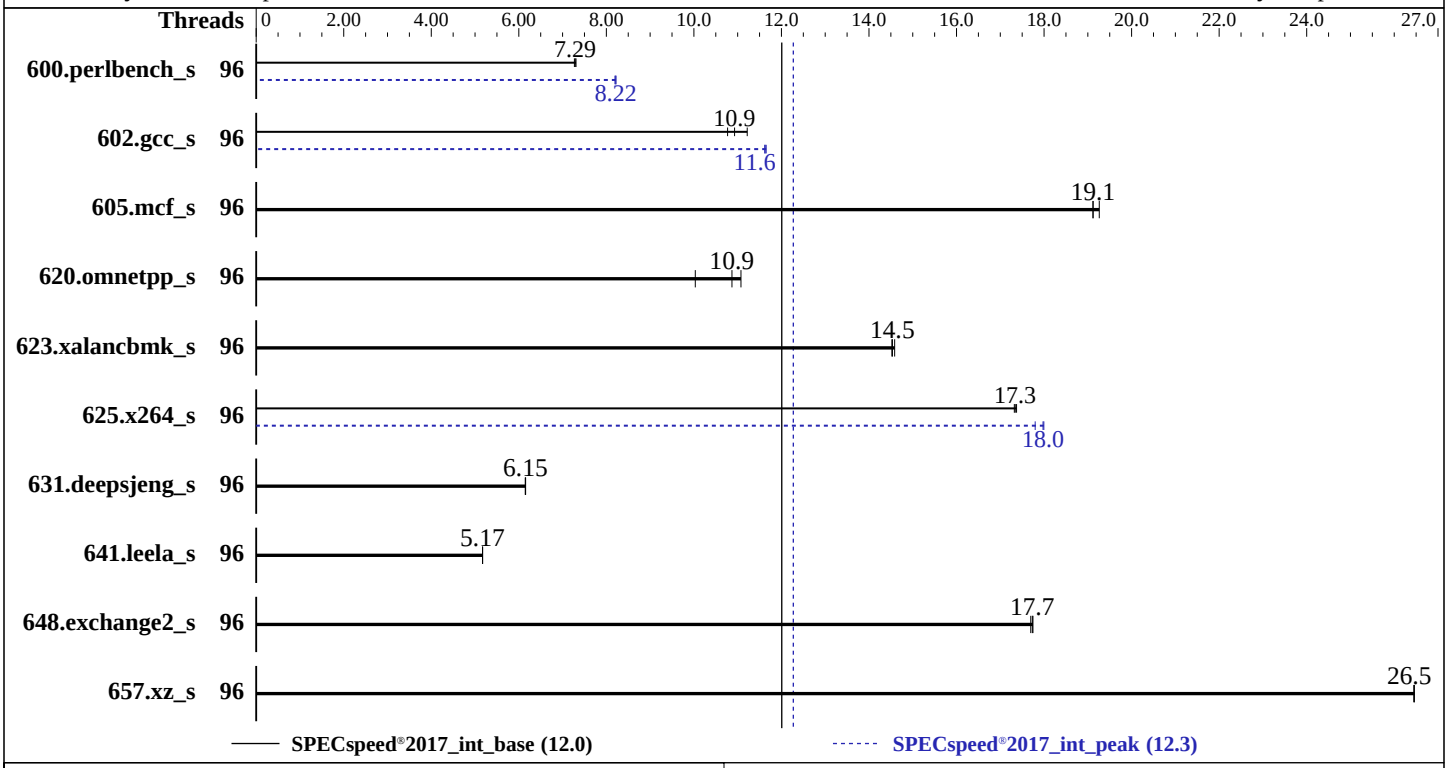


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon Gold 6348H |
| Max MHz: | 4200 |
| Nominal: | 2300 |
| Enabled: | 96 cores, 4 chips |
| Orderable: | 1,2,4 chips |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 1 MB I+D on chip per core |
| L3: | 33 MB I+D on chip per chip |
| Other: | None |
| Memory: | 1536 GB (48 x 32 GB 2Rx4 PC4-3200AA-R, running at 2933) |
| Storage: | 1 x 200 GB SATA III SSD |
| Other: | None |

## Software

| | |
|---|---|
| OS: | Red Hat Enterprise Linux 8.2<br>Kernel 4.18.0-193.el8.x86_64 |
| Compiler: | C/C++: Version 19.1.1.217 of Intel C/C++ Compiler for Linux;<br>Fortran: Version 19.1.1.217 of Intel Fortran Compiler for Linux |
| Parallel: | Yes |
| Firmware: | Version 1.0 released Sep-2020 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | jemalloc memory allocator V5.0.1 |
| Power Management: | BIOS set to prefer performance at the cost of additional power usage. |

# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-240P-TNRT
(X12QCH+ , Intel Xeon Gold 6348H)

SPECspeed®2017_int_base = 12.0

SPECspeed®2017_int_peak = 12.3

**CPU2017 License:** 001176
**Test Sponsor:** Supermicro
**Tested by:** Supermicro

**Test Date:** Oct-2020
**Hardware Availability:** Sep-2020
**Software Availability:** Apr-2020

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 600.perlbench_s | 96 | 243 | 7.31 | **244** | **7.29** | 244 | 7.27 | 96 | **216** | **8.22** | 217 | 8.20 | 216 | 8.22 |
| 602.gcc_s | 96 | 370 | 10.8 | 355 | 11.2 | **364** | **10.9** | 96 | 343 | 11.6 | 342 | 11.7 | **342** | **11.6** |
| 605.mcf_s | 96 | **247** | **19.1** | 247 | 19.1 | 245 | 19.3 | 96 | **247** | **19.1** | 247 | 19.1 | 245 | 19.3 |
| 620.omnetpp_s | 96 | 163 | 10.0 | **150** | **10.9** | 147 | 11.1 | 96 | 163 | 10.0 | **150** | **10.9** | 147 | 11.1 |
| 623.xalancbmk_s | 96 | 97.1 | 14.6 | 97.6 | 14.5 | **97.5** | **14.5** | 96 | 97.1 | 14.6 | 97.6 | 14.5 | **97.5** | **14.5** |
| 625.x264_s | 96 | 102 | 17.4 | **102** | **17.3** | 102 | 17.3 | 96 | 98.0 | 18.0 | **98.1** | **18.0** | 99.1 | 17.8 |
| 631.deepsjeng_s | 96 | 233 | 6.15 | **233** | **6.15** | 233 | 6.15 | 96 | 233 | 6.15 | **233** | **6.15** | 233 | 6.15 |
| 641.leela_s | 96 | 330 | 5.17 | 330 | 5.17 | **330** | **5.17** | 96 | 330 | 5.17 | 330 | 5.17 | **330** | **5.17** |
| 648.exchange2_s | 96 | 166 | 17.7 | 166 | 17.7 | **166** | **17.7** | 96 | 166 | 17.7 | 166 | 17.7 | **166** | **17.7** |
| 657.xz_s | 96 | **234** | **26.5** | 234 | 26.5 | 234 | 26.5 | 96 | **234** | **26.5** | 234 | 26.5 | 234 | 26.5 |

**SPECspeed®2017_int_base = 12.0**

**SPECspeed®2017_int_peak = 12.3**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

```
The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler.
The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
```

**(Continued on next page)**

## General Notes (Continued)

```
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

## Platform Notes

```
BIOS Settings:
Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Performance
Hyper-Threading = Disable
Stale AtoS = Disable
Patrol Scrub = Disable

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on X12QCH-01 Sat Oct  3 23:45:21 2020

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Gold 6348H CPU @ 2.30GHz
      4  "physical id"s (chips)
      96 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 24
      siblings  : 24
      physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
      physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
      physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
      physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

From lscpu:
     Architecture:        x86_64
     CPU op-mode(s):      32-bit, 64-bit
     Byte Order:          Little Endian
     CPU(s):              96
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      On-line CPU(s) list: 0-95
      Thread(s) per core:  1
      Core(s) per socket:  24
      Socket(s):           4
      NUMA node(s):        4
      Vendor ID:           GenuineIntel
      CPU family:          6
      Model:               85
      Model name:          Intel(R) Xeon(R) Gold 6348H CPU @ 2.30GHz
      Stepping:            11
      CPU MHz:             2416.011
      CPU max MHz:         4200.0000
      CPU min MHz:         1000.0000
      BogoMIPS:            4600.00
      Virtualization:      VT-x
      L1d cache:           32K
      L1i cache:           32K
      L2 cache:            1024K
      L3 cache:            33792K
      NUMA node0 CPU(s):   0-23
      NUMA node1 CPU(s):   24-47
      NUMA node2 CPU(s):   48-71
      NUMA node3 CPU(s):   72-95
      Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
      invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
      flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
      cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
      avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
      cqm_mbm_local avx512_bf16 dtherm ida arat pln pts pku ospke avx512_vnni md_clear
      flush_l1d arch_capabilities

  /proc/cpuinfo cache data
     cache size : 33792 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 4 nodes (0-3)
    node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23
    node 0 size: 385606 MB
    node 0 free: 384158 MB
    node 1 cpus: 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47
    node 1 size: 387066 MB
```

**(Continued on next page)**

## Platform Notes (Continued)

```
   node 1 free: 386819 MB
   node 2 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71
   node 2 size: 387038 MB
   node 2 free: 386715 MB
   node 3 cpus: 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95
   node 3 size: 387065 MB
   node 3 free: 386845 MB
   node distances:
   node   0   1   2   3
     0:  10  20  20  20
     1:  20  10  20  20
     2:  20  20  10  20
     3:  20  20  20  10

 From /proc/meminfo
    MemTotal:       1583900452 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    os-release:
       NAME="Red Hat Enterprise Linux"
       VERSION="8.2 (Ootpa)"
       ID="rhel"
       ID_LIKE="fedora"
       VERSION_ID="8.2"
       PLATFORM_ID="platform:el8"
       PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
       ANSI_COLOR="0;31"
    redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
    system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga

 uname -a:
    Linux X12QCH-01 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020 x86_64
    x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 itlb_multihit:                          Not affected
 CVE-2018-3620 (L1 Terminal Fault):      Not affected
 Microarchitectural Data Sampling:       Not affected
 CVE-2017-5754 (Meltdown):               Not affected
 CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                         via prctl and seccomp
 CVE-2017-5753 (Spectre variant 1):      Mitigation: usercopy/swapgs barriers and __user
                                         pointer sanitization
```

**(Continued on next page)**

## Platform Notes (Continued)

```
 CVE-2017-5715 (Spectre variant 2):        Mitigation: Enhanced IBRS, IBPB: conditional,
                                            RSB filling
 tsx_async_abort:                          Not affected

 run-level 3 Oct 3 22:07

 SPEC is set to: /home/cpu2017
    Filesystem            Type  Size  Used Avail Use% Mounted on
    /dev/mapper/rhel-home xfs   125G  111G   14G  89% /home

 From /sys/devices/virtual/dmi/id
     BIOS:    American Megatrends International, LLC. 1.0 09/02/2020
     Vendor:  Supermicro
     Product: Super Server
     Product Family: Family
     Serial:  0123456789

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     48x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200

 (End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
C       | 600.perlbench_s(base) 602.gcc_s(base, peak) 605.mcf_s(base, peak)
        | 625.x264_s(base, peak) 657.xz_s(base, peak)
------------------------------------------------------------------------------
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 600.perlbench_s(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
C       | 600.perlbench_s(base) 602.gcc_s(base, peak) 605.mcf_s(base, peak)
        | 625.x264_s(base, peak) 657.xz_s(base, peak)
------------------------------------------------------------------------------
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 600.perlbench_s(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)
        | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 648.exchange2_s(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

## Base Portability Flags

600.perlbench_s: `-DSPEC_LP64 -DSPEC_LINUX_X64`
602.gcc_s: `-DSPEC_LP64`
605.mcf_s: `-DSPEC_LP64`
620.omnetpp_s: `-DSPEC_LP64`
623.xalancbmk_s: `-DSPEC_LP64 -DSPEC_LINUX`
625.x264_s: `-DSPEC_LP64`
631.deepsjeng_s: `-DSPEC_LP64`
641.leela_s: `-DSPEC_LP64`
648.exchange2_s: `-DSPEC_LP64`
657.xz_s: `-DSPEC_LP64`

## Base Optimization Flags

C benchmarks:
`-m64 -qnextgen -std=c11`
`-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs`
`-xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops`
`-fuse-ld=gold -qopt-mem-layout-trans=4 -fopenmp -DSPEC_OPENMP`
`-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

C++ benchmarks:
`-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries`
`-Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse`
`-funroll-loops -fuse-ld=gold -qopt-mem-layout-trans=4`
`-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin`
`-lqkmalloc`

Fortran benchmarks:
`-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -xCORE-AVX512`
`-O3 -ipo -no-prec-div -qopt-mem-layout-trans=4`
`-nostandard-realloc-lhs -align array32byte`
`-mbranches-within-32B-boundaries`

## Peak Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

**(Continued on next page)**

## Peak Compiler Invocation (Continued)

Fortran benchmarks:
ifort

## Peak Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64(*) -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

(*) Indicates a portability flag that was found in a non-portability variable.

## Peak Optimization Flags

C benchmarks:

600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

602.gcc_s: -m64 -qnextgen -std=c11 -fuse-ld=gold
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

605.mcf_s: basepeak = yes

625.x264_s: -m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX512 -flto -O3 -ffast-math
-fuse-ld=gold -qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

**(Continued on next page)**

## Peak Optimization Flags (Continued)

657.xz_s: `basepeak = yes`

C++ benchmarks:

620.omnetpp_s: `basepeak = yes`

623.xalancbmk_s: `basepeak = yes`

631.deepsjeng_s: `basepeak = yes`

641.leela_s: `basepeak = yes`

Fortran benchmarks:

648.exchange2_s: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.html`
`http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revG.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.xml`
`http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revG.xml`


SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-10-03 11:45:21-0400.
Report generated on 2020-10-27 16:15:26 by CPU2017 PS formatter v6255.
Originally published on 2020-10-27.