SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa

eterio 217 RZ1 (AMD Epyc 7302, 3.0 GHz)
AMD EPYC 7302

SPECrate®2017_int_base = 243

SPECrate®2017_int_peak = 255

CPU2017 License: 9081
Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa
Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Test Date: Oct-2020
Hardware Availability: Aug-2019
Software Availability: Sep-2020

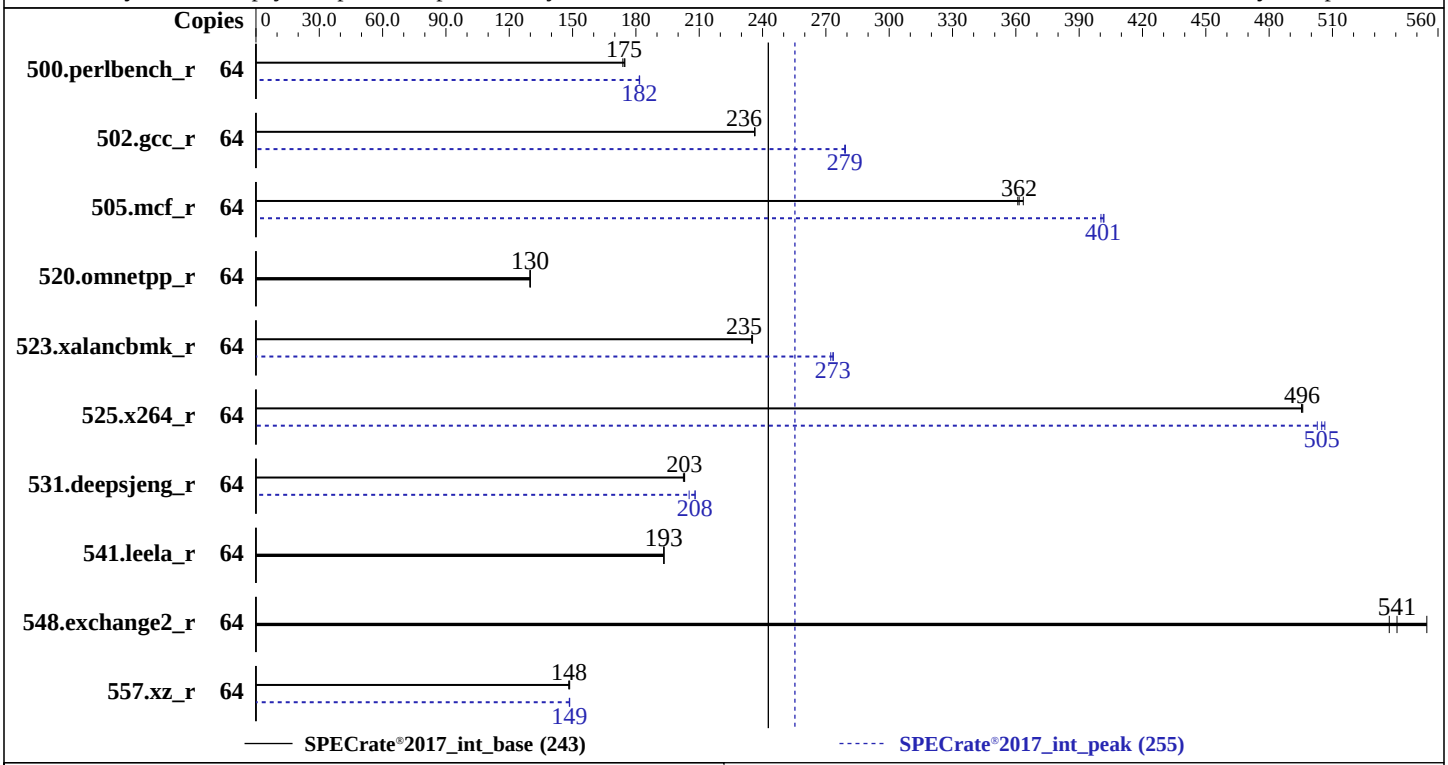

Hardware

CPU Name:	AMD EPYC 7302
Max MHz:	3300
Nominal:	3000
Enabled:	32 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	128 MB I+D on chip per chip, 16 MB shared / 2 cores
Other:	None
Memory:	512 GB (16 x 32 GB 2Rx4 PC4-3200V-L)
Storage:	1 x 960 GB SSD SATA III
Other:	None

Software

OS:	CentOS Linux 8.2 kernel version 4.18.0-193.19.1.el8_2.x86_64
Compiler:	C/C++/Fortran: Version 2.0.0 of AOCC
Parallel:	No
Firmware:	Version 3003 released Jul-2020
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc: jemalloc memory allocator library v5.2.0
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa

eterio 217 RZ1 (AMD Epyc 7302, 3.0 GHz)
AMD EPYC 7302

SPECrate®2017_int_base = 243

SPECrate®2017_int_peak = 255

CPU2017 License: 9081
Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa
Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Test Date: Oct-2020
Hardware Availability: Aug-2019
Software Availability: Sep-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	586	174	583	175	**584**	**175**	64	561	182	**561**	**182**	561	182
502.gcc_r	64	**384**	**236**	384	236	383	236	64	**325**	**279**	325	279	324	279
505.mcf_r	64	**286**	**362**	285	364	287	361	64	**258**	**401**	258	400	257	402
520.omnetpp_r	64	**646**	**130**	647	130	646	130	64	**646**	**130**	647	130	646	130
523.xalancbmk_r	64	288	235	**287**	**235**	287	235	64	247	274	**247**	**273**	248	272
525.x264_r	64	**226**	**496**	226	496	226	495	64	**222**	**505**	221	506	223	503
531.deepsjeng_r	64	**361**	**203**	361	203	362	203	64	**353**	**208**	352	208	357	205
541.leela_r	64	**548**	**193**	548	193	548	193	64	**548**	**193**	548	193	548	193
548.exchange2_r	64	**310**	**541**	312	537	302	555	64	**310**	**541**	312	537	302	555
557.xz_r	64	**466**	**148**	465	149	466	148	64	466	148	465	149	**465**	**149**

SPECrate®2017_int_base = 243

SPECrate®2017_int_peak = 255

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).
```

(Continued on next page)

Operating System Notes (Continued)

```
Transparent huge pages set to 'always' for this run (OS default)
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/CPU2017-1.1.0/amd_rate_aocc200_rome_C_lib/64;/home/CPU2017-1.1.0/
     amd_rate_aocc200_rome_C_lib/32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.2.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2
```

Platform Notes

```
BIOS settings:
Power phase shedding = Disabled
SVM Mode = Disabled
SR-IOV support = Disabled
DRAM Scrub time = Disabled
NUMA nodes per socket = NPS4
Determinism Slider = Power

 Sysinfo program /home/CPU2017-1.1.0/bin/sysinfo
 Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
 running on Zyxel Tue Oct 20 06:48:57 2020

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo
```

(Continued on next page)

Platform Notes (Continued)

```
From /proc/cpuinfo
   model name : AMD EPYC 7302 16-Core Processor
      2  "physical id"s (chips)
      64 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 16
      siblings  : 32
      physical 0: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29
      physical 1: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29

From lscpu:
     Architecture:        x86_64
     CPU op-mode(s):      32-bit, 64-bit
     Byte Order:          Little Endian
     CPU(s):              64
     On-line CPU(s) list: 0-63
     Thread(s) per core:  2
     Core(s) per socket:  16
     Socket(s):           2
     NUMA node(s):        8
     Vendor ID:           AuthenticAMD
     CPU family:          23
     Model:               49
     Model name:          AMD EPYC 7302 16-Core Processor
     Stepping:            0
     CPU MHz:             2325.282
     CPU max MHz:         3000.0000
     CPU min MHz:         1500.0000
     BogoMIPS:            6000.47
     Virtualization:      AMD-V
     L1d cache:           32K
     L1i cache:           32K
     L2 cache:            512K
     L3 cache:            16384K
     NUMA node0 CPU(s):   0-3,32-35
     NUMA node1 CPU(s):   4-7,36-39
     NUMA node2 CPU(s):   8-11,40-43
     NUMA node3 CPU(s):   12-15,44-47
     NUMA node4 CPU(s):   16-19,48-51
     NUMA node5 CPU(s):   20-23,52-55
     NUMA node6 CPU(s):   24-27,56-59
     NUMA node7 CPU(s):   28-31,60-63
     Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
     pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
     constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
     monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm
```

(Continued on next page)

Platform Notes (Continued)

```
      cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs
      skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
      cdp_l3 hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep
      bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
      cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd
      arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
      pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor
      smca

 /proc/cpuinfo cache data
    cache size : 512 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 8 nodes (0-7)
   node 0 cpus: 0 1 2 3 32 33 34 35
   node 0 size: 64063 MB
   node 0 free: 63900 MB
   node 1 cpus: 4 5 6 7 36 37 38 39
   node 1 size: 64508 MB
   node 1 free: 64219 MB
   node 2 cpus: 8 9 10 11 40 41 42 43
   node 2 size: 64481 MB
   node 2 free: 64229 MB
   node 3 cpus: 12 13 14 15 44 45 46 47
   node 3 size: 64496 MB
   node 3 free: 64336 MB
   node 4 cpus: 16 17 18 19 48 49 50 51
   node 4 size: 64508 MB
   node 4 free: 64379 MB
   node 5 cpus: 20 21 22 23 52 53 54 55
   node 5 size: 64508 MB
   node 5 free: 64399 MB
   node 6 cpus: 24 25 26 27 56 57 58 59
   node 6 size: 64508 MB
   node 6 free: 64398 MB
   node 7 cpus: 28 29 30 31 60 61 62 63
   node 7 size: 64509 MB
   node 7 free: 64400 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  12  12  12  32  32  32  32
     1:  12  10  12  12  32  32  32  32
     2:  12  12  10  12  32  32  32  32
     3:  12  12  12  10  32  32  32  32
     4:  32  32  32  32  10  12  12  12
     5:  32  32  32  32  12  10  12  12
```

(Continued on next page)

Platform Notes (Continued)

```
     6:  32  32  32  32  12  12  10  12
     7:  32  32  32  32  12  12  12  10

  From /proc/meminfo
     MemTotal:       527961084 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     centos-release: CentOS Linux release 8.2.2004 (Core)
     centos-release-upstream: Derived from Red Hat Enterprise Linux 8.2 (Source)
     os-release:
        NAME="CentOS Linux"
        VERSION="8 (Core)"
        ID="centos"
        ID_LIKE="rhel fedora"
        VERSION_ID="8"
        PLATFORM_ID="platform:el8"
        PRETTY_NAME="CentOS Linux 8 (Core)"
        ANSI_COLOR="0;31"
     redhat-release: CentOS Linux release 8.2.2004 (Core)
     system-release: CentOS Linux release 8.2.2004 (Core)
     system-release-cpe: cpe:/o:centos:centos:8

  uname -a:
     Linux Zyxel 4.18.0-193.19.1.el8_2.x86_64 #1 SMP Mon Sep 14 14:37:00 UTC 2020 x86_64
     x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  itlb_multihit:                            Not affected
  CVE-2018-3620 (L1 Terminal Fault):        Not affected
  Microarchitectural Data Sampling:         Not affected
  CVE-2017-5754 (Meltdown):                 Not affected
  CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                             via prctl and seccomp
  CVE-2017-5753 (Spectre variant 1):        Mitigation: usercopy/swapgs barriers and __user
                                             pointer sanitization
  CVE-2017-5715 (Spectre variant 2):         Mitigation: Full AMD retpoline, IBPB:
                                            conditional, IBRS_FW, STIBP: conditional, RSB
                                             filling
  srbds:                                     Not affected
  tsx_async_abort:                           Not affected

  run-level 3 Oct 20 05:15

  SPEC is set to: /home/CPU2017-1.1.0
```

(Continued on next page)

Platform Notes (Continued)

```
    Filesystem                Type  Size  Used Avail Use% Mounted on
    /dev/mapper/cl_zyxel-home xfs   839G  9.7G  829G   2% /home

 From /sys/devices/virtual/dmi/id
     BIOS:    American Megatrends Inc. 3003 07/10/2020
     Vendor:  ASUSTeK COMPUTER INC.
     Product: KNPP-D32-R Series
     Product Family: Server
     Serial:  System Serial Number

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     16x Micron Technology 36ASF4G72PZ-3G2E2 32 kB 2 rank 3200
     16x Unknown Unknown

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Base Portability Flags

500.perlbench_r: `-DSPEC_LINUX_X64 -DSPEC_LP64`
502.gcc_r: `-DSPEC_LP64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LINUX -DSPEC_LP64`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`

(Continued on next page)

Base Portability Flags (Continued)

541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:
```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:
```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -lmvec -lamdlibm -ljemalloc -lflang
```

Peak Compiler Invocation

C benchmarks:
`clang`

(Continued on next page)

Peak Compiler Invocation (Continued)

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC

(Continued on next page)

Peak Optimization Flags (Continued)

502.gcc_r (continued):
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -fgnu89-inline -ljemalloc

505.mcf_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang

525.x264_r: Same as 500.perlbench_r

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -ljemalloc

531.deepsjeng_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize

(Continued on next page)

Peak Optimization Flags (Continued)

531.deepsjeng_r (continued):
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -lmvec -lamdlibm -ljemalloc
-lflang

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks:

502.gcc_r: -L/sppo/dev/cpu2017/v110/amd_rate_aocc200_rome_C_lib/32

C++ benchmarks:

523.xalancbmk_r: -L/sppo/dev/cpu2017/v110/amd_rate_aocc200_rome_C_lib/32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc200-flags-C4.html
http://www.spec.org/cpu2017/flags/Epsylon_platform_amd_RZ1_rome.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc200-flags-C4.xml
http://www.spec.org/cpu2017/flags/Epsylon_platform_amd_RZ1_rome.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-10-20 06:48:57-0400.
Report generated on 2020-11-10 15:20:43 by CPU2017 PS formatter v6255.
Originally published on 2020-11-10.