SPEC CPU®2017 Integer Rate Result

Lenovo Global Technology

ThinkSystem SR850P
(2.30 GHz, Intel Xeon Gold 6230N)

SPECrate®2017_int_base = 483

SPECrate®2017_int_peak = Not Run

CPU2017 License:	9017	**Test Date:**	Nov-2020
Test Sponsor:	Lenovo Global Technology	**Hardware Availability:**	Jun-2020
Tested by:	Lenovo Global Technology	**Software Availability:**	Aug-2020

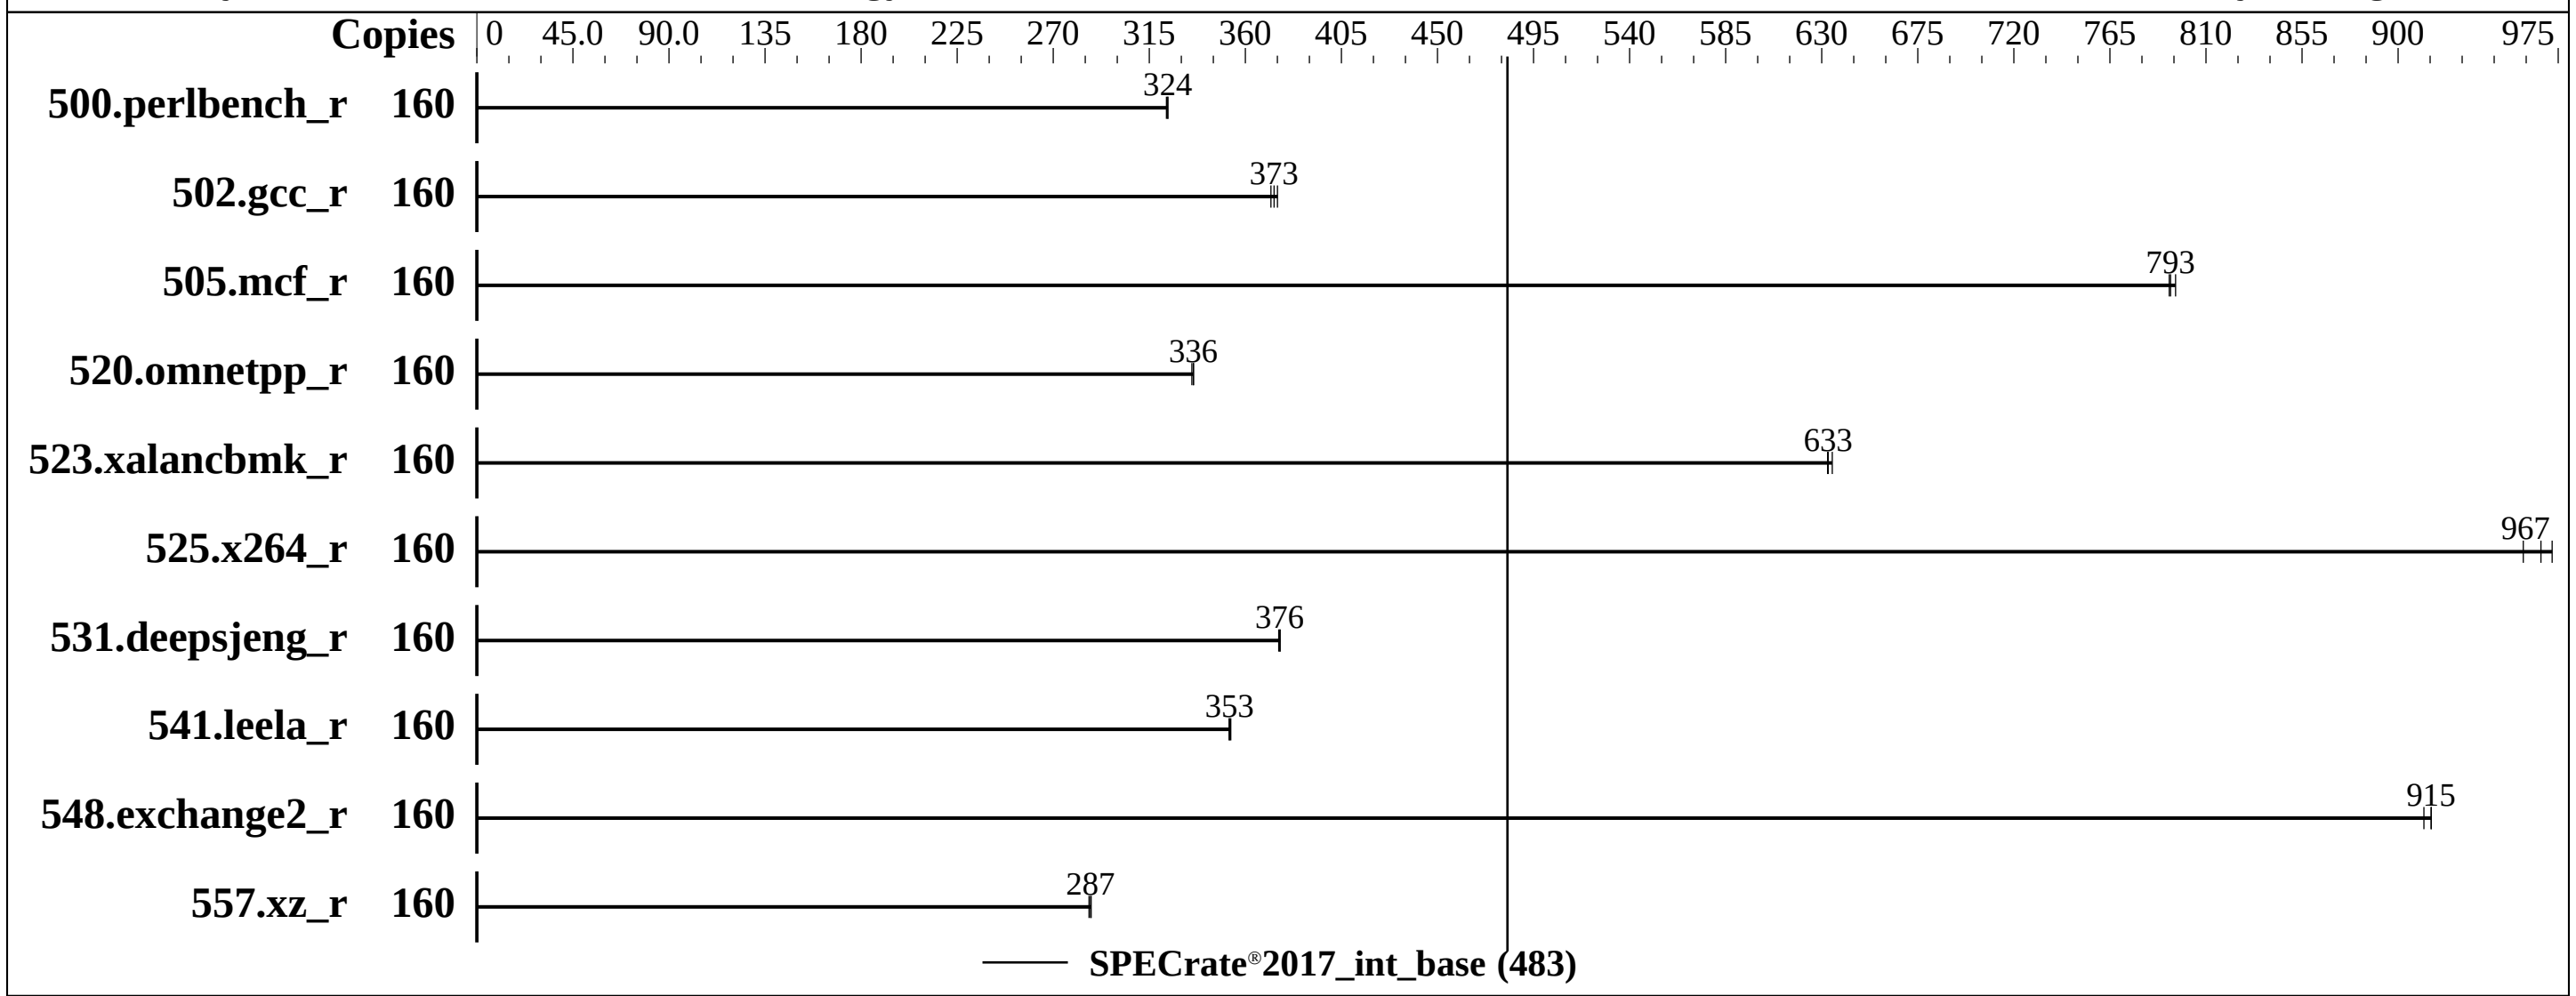

Hardware

CPU Name:	Intel Xeon Gold 6230N
Max MHz:	3500
Nominal:	2300
Enabled:	80 cores, 4 chips, 2 threads/core
Orderable:	4 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	27.5 MB I+D on chip per chip
Other:	None
Memory:	1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R)
Storage:	1 x 960 GB SATA SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux 8.0 (Ootpa) Kernel 4.18.0-80.el8.x86_64
Compiler:	C/C++: Version 19.1.2.275 of Intel C/C++ Compiler for Linux; Fortran: Version 19.1.2.275 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Lenovo BIOS Version TEE156L 2.61 released May-2020
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None
Power Management:	BIOS set to prefer performance at the cost of additional power usage

Results Table

	Base							Peak						
Benchmark	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	160	789	323	**787**	**324**	787	324							
502.gcc_r	160	604	375	609	372	**607**	**373**							
505.mcf_r	160	**326**	**793**	325	796	326	793							
520.omnetpp_r	160	**625**	**336**	627	335	625	336							
523.xalancbmk_r	160	266	635	**267**	**633**	267	633							
525.x264_r	160	**290**	**967**	292	959	288	972							
531.deepsjeng_r	160	**487**	**376**	487	376	488	376							
541.leela_r	160	750	353	752	352	**751**	**353**							
548.exchange2_r	160	458	916	**458**	**915**	460	912							
557.xz_r	160	**601**	**287**	603	287	601	288							

SPECrate®2017_int_base = 483

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2017-1.1.0-ic19.1u2/lib/intel64:/home/cpu2017-1.1.0-ic19.1u2/l
     ib/ia32:/home/cpu2017-1.1.0-ic19.1u2/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
```

(Continued on next page)

General Notes (Continued)

```
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance and then set it to Custom Mode
MONITOR/MWAIT set to Enable
CPU P-state Control set to Legacy
Adjacent Cache Prefetch set to Disable
DCU Streamer Prefetcher set to Disable
SNC set to Enable

 Sysinfo program /home/cpu2017-1.1.0-ic19.1u2/bin/sysinfo
 Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
 running on localhost.localdomain Thu Nov 19 05:50:26 2020

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 6230N CPU @ 2.30GHz
       4  "physical id"s (chips)
       160 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 20
       siblings  : 40
       physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
       physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
       physical 2: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
       physical 3: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

 From lscpu:
      Architecture:        x86_64
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
      CPU(s):              160
      On-line CPU(s) list: 0-159
```

(Continued on next page)

Lenovo Global Technology

ThinkSystem SR850P
(2.30 GHz, Intel Xeon Gold 6230N)

SPECrate®2017_int_base = 483

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology
Test Date: Nov-2020
Hardware Availability: Jun-2020
Software Availability: Aug-2020

Platform Notes (Continued)

```
     Thread(s) per core:  2
     Core(s) per socket:  20
     Socket(s):           4
     NUMA node(s):        8
     Vendor ID:           GenuineIntel
     CPU family:          6
     Model:               85
     Model name:          Intel(R) Xeon(R) Gold 6230N CPU @ 2.30GHz
     Stepping:            7
     CPU MHz:             2826.327
     CPU max MHz:         3500.0000
     CPU min MHz:         1000.0000
     BogoMIPS:            4600.00
     Virtualization:      VT-x
     L1d cache:           32K
     L1i cache:           32K
     L2 cache:            1024K
     L3 cache:            28160K
     NUMA node0 CPU(s):   0-2,5,6,10-12,15,16,80-82,85,86,90-92,95,96
     NUMA node1 CPU(s):   3,4,7-9,13,14,17-19,83,84,87-89,93,94,97-99
     NUMA node2 CPU(s):   20-22,25,26,30-32,35,36,100-102,105,106,110-112,115,116
     NUMA node3 CPU(s):   23,24,27-29,33,34,37-39,103,104,107-109,113,114,117-119
     NUMA node4 CPU(s):   40-42,45,46,50-52,55,56,120-122,125,126,130-132,135,136
     NUMA node5 CPU(s):   43,44,47-49,53,54,57-59,123,124,127-129,133,134,137-139
     NUMA node6 CPU(s):   60-62,65,66,70-72,75,76,140-142,145,146,150-152,155,156
     NUMA node7 CPU(s):   63,64,67-69,73,74,77-79,143,144,147-149,153,154,157-159
     Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
     pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
     lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
     aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
     xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
     avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
     invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
     flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
     cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
     avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
     cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni flush_l1d
     arch_capabilities

 /proc/cpuinfo cache data
    cache size : 28160 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 8 nodes (0-7)
   node 0 cpus: 0 1 2 5 6 10 11 12 15 16 80 81 82 85 86 90 91 92 95 96
   node 0 size: 193148 MB
```

(Continued on next page)

Platform Notes (Continued)

```
    node 0 free: 192691 MB
    node 1 cpus: 3 4 7 8 9 13 14 17 18 19 83 84 87 88 89 93 94 97 98 99
    node 1 size: 193531 MB
    node 1 free: 193135 MB
    node 2 cpus: 20 21 22 25 26 30 31 32 35 36 100 101 102 105 106 110 111 112 115 116
    node 2 size: 193531 MB
    node 2 free: 193220 MB
    node 3 cpus: 23 24 27 28 29 33 34 37 38 39 103 104 107 108 109 113 114 117 118 119
    node 3 size: 193531 MB
    node 3 free: 193200 MB
    node 4 cpus: 40 41 42 45 46 50 51 52 55 56 120 121 122 125 126 130 131 132 135 136
    node 4 size: 193531 MB
    node 4 free: 193188 MB
    node 5 cpus: 43 44 47 48 49 53 54 57 58 59 123 124 127 128 129 133 134 137 138 139
    node 5 size: 193531 MB
    node 5 free: 193205 MB
    node 6 cpus: 60 61 62 65 66 70 71 72 75 76 140 141 142 145 146 150 151 152 155 156
    node 6 size: 193531 MB
    node 6 free: 192333 MB
    node 7 cpus: 63 64 67 68 69 73 74 77 78 79 143 144 147 148 149 153 154 157 158 159
    node 7 size: 193504 MB
    node 7 free: 193165 MB
    node distances:
    node   0   1   2   3   4   5   6   7
      0:  10  11  21  21  21  21  21  21
      1:  11  10  21  21  21  21  21  21
      2:  21  21  10  11  21  21  21  21
      3:  21  21  11  10  21  21  21  21
      4:  21  21  21  21  10  11  21  21
      5:  21  21  21  21  11  10  21  21
      6:  21  21  21  21  21  21  10  11
      7:  21  21  21  21  21  21  11  10

  From /proc/meminfo
     MemTotal:       1584992600 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux"
        VERSION="8.0 (Ootpa)"
        ID="rhel"
        ID_LIKE="fedora"
        VERSION_ID="8.0"
        PLATFORM_ID="platform:el8"
        PRETTY_NAME="Red Hat Enterprise Linux 8.0 (Ootpa)"
```

(Continued on next page)

Platform Notes (Continued)

```
      ANSI_COLOR="0;31"
   redhat-release: Red Hat Enterprise Linux release 8.0 (Ootpa)
   system-release: Red Hat Enterprise Linux release 8.0 (Ootpa)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:8.0:ga

uname -a:
   Linux localhost.localdomain 4.18.0-80.el8.x86_64 #1 SMP Wed Mar 13 12:02:46 UTC 2019
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):         Not affected
Microarchitectural Data Sampling:          No status reported
CVE-2017-5754 (Meltdown):                  Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                           via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):         Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):        Mitigation: Enhanced IBRS, IBPB: conditional,
                                           RSB filling

run-level 3 Nov 19 00:52

SPEC is set to: /home/cpu2017-1.1.0-ic19.1u2
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda4      xfs   839G   65G  774G   8% /home

From /sys/devices/virtual/dmi/id
    BIOS:    Lenovo -[TEE156L-2.61]- 05/20/2020
    Vendor:  Lenovo
    Product: ThinkSystem SR850P -[7D2HCTO1WW]-
    Product Family: ThinkSystem
    Serial:  1234567890

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    48x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
        | 525.x264_r(base) 557.xz_r(base)
------------------------------------------------------------------------------
Intel(R) C Compiler for applications running on Intel(R) 64, Version
  19.1.2.275 Build 20200604
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
        | 541.leela_r(base)
------------------------------------------------------------------------------
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version
  19.1.2.275 Build 20200604
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX2 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.3.275/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.3.275/linux/compiler/lib/intel64_lin
-lqkmalloc

Fortran benchmarks:
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX2 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.3.275/linux/compiler/lib/intel64_lin
-lqkmalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.html
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-I.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.xml
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-I.xml

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-11-18 16:50:26-0500.
Report generated on 2020-12-08 15:18:31 by CPU2017 PS formatter v6255.
Originally published on 2020-12-08.