SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur NF5266M5 (Intel Xeon Gold 5220R)

SPECrate®2017_fp_base = 234

SPECrate®2017_fp_peak = 248

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Nov-2020
Hardware Availability: Feb-2020
Software Availability: Aug-2020

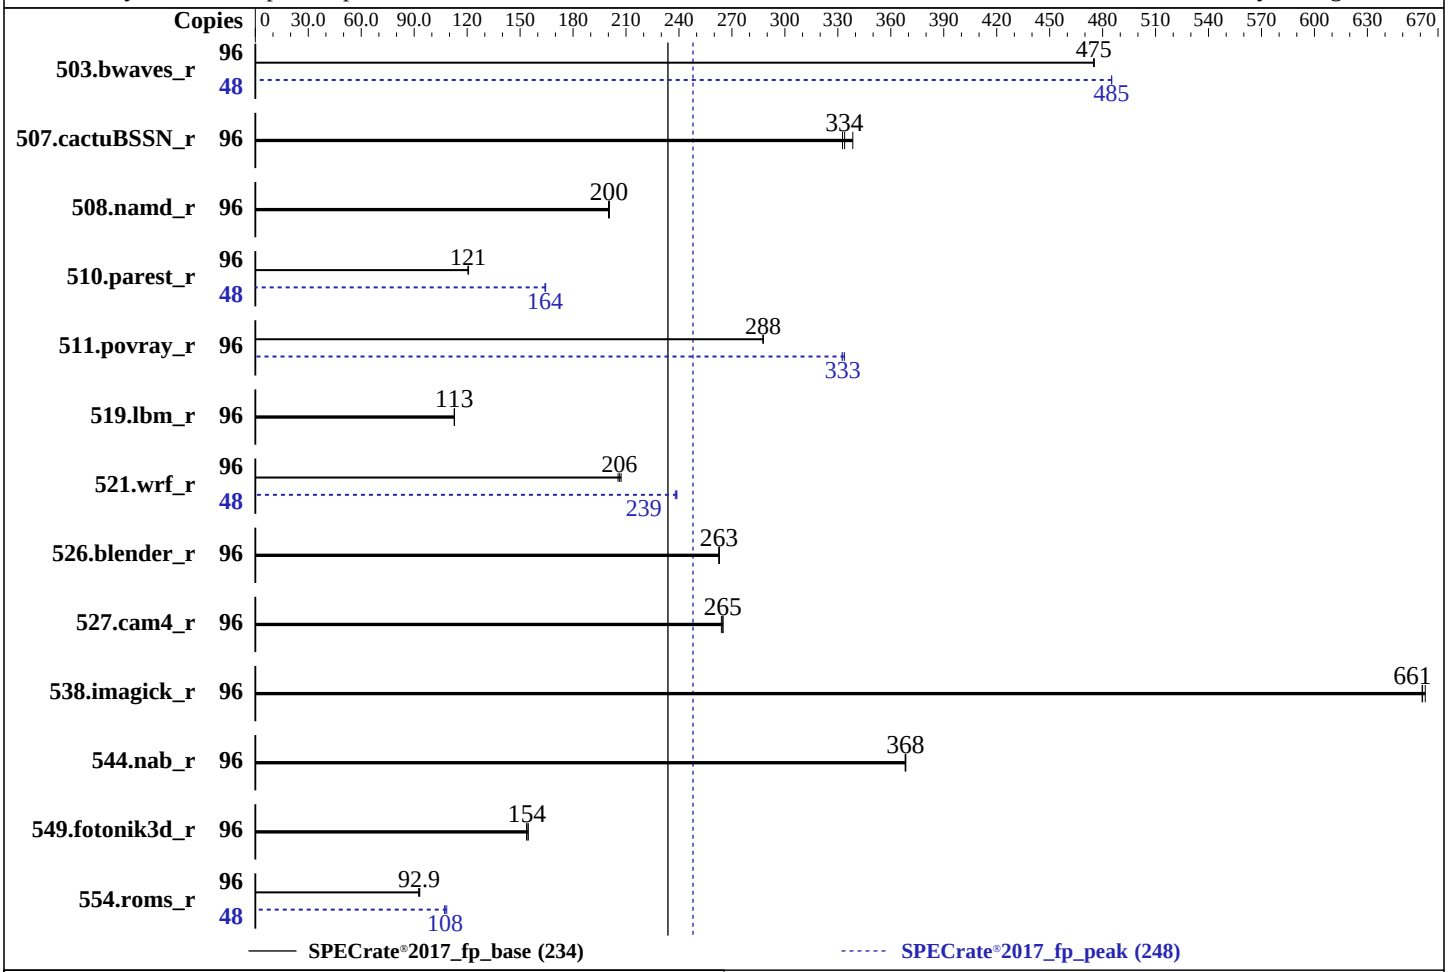

Hardware

CPU Name:	Intel Xeon Gold 5220R
Max MHz:	4000
Nominal:	2200
Enabled:	48 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	35.75 MB I+D on chip per chip
Other:	None
Memory:	384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R, running at 2666)
Storage:	2 x 3.7 TB NVME SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux release 8.2 (Ootpa) 4.18.0-193.el8.x86_64
Compiler:	C/C++: Version 19.1.2.275 of Intel C/C++ Compiler Build 20200604 for Linux; Fortran: Version 19.1.2.275 of Intel Fortran Compiler Build 20200623 for Linux;
Parallel:	No
Firmware:	Version 3.1.5 released May-2020
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur NF5266M5 (Intel Xeon Gold 5220R)

SPECrate®2017_fp_base = 234

SPECrate®2017_fp_peak = 248

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Nov-2020
Hardware Availability: Feb-2020
Software Availability: Aug-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	2027	475	2026	475	**2026**	**475**	48	**992**	**485**	992	485	992	485
507.cactuBSSN_r	96	359	338	**364**	**334**	365	333	96	359	338	**364**	**334**	365	333
508.namd_r	96	**455**	**200**	455	201	456	200	96	**455**	**200**	455	201	456	200
510.parest_r	96	2079	121	2084	121	**2082**	**121**	48	765	164	763	164	**764**	**164**
511.povray_r	96	779	288	779	288	**779**	**288**	96	674	332	**674**	**333**	672	334
519.lbm_r	96	897	113	**897**	**113**	898	113	96	897	113	**897**	**113**	898	113
521.wrf_r	96	1046	206	**1042**	**206**	1038	207	48	**451**	**239**	450	239	452	238
526.blender_r	96	556	263	**557**	**263**	557	263	96	556	263	**557**	**263**	557	263
527.cam4_r	96	634	265	**634**	**265**	636	264	96	634	265	**634**	**265**	636	264
538.imagick_r	96	360	663	**361**	**661**	361	661	96	360	663	**361**	**661**	361	661
544.nab_r	96	439	368	**439**	**368**	438	369	96	439	368	**439**	**368**	438	369
549.fotonik3d_r	96	2435	154	**2430**	**154**	2419	155	96	2435	154	**2430**	**154**	2419	155
554.roms_r	96	1649	92.5	1638	93.2	**1642**	**92.9**	48	703	108	**709**	**108**	712	107

SPECrate®2017_fp_base = 234

SPECrate®2017_fp_peak = 248

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
SCALING_GOVERNOR set to Performance
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
```

(Continued on next page)

General Notes (Continued)

```
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5,
and the system compiler gcc 4.8.5;
sources available from jemalloc.net or
https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS configuration:
ENERGY_PERF_BIAS_CFG mode set to Performance
Hardware Prefetch set to Disable
VT Support set to Disable
C1E Support set to Disable
IMC (Integrated memory controller) Interleaving set to 1-way
Sub NUMA Cluster (SNC) set to Enable

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on localhost.localdomain Fri Nov 20 10:09:27 2020

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Gold 5220R CPU @ 2.20GHz
      2  "physical id"s (chips)
      96 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 24
      siblings  : 48
      physical 0: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29

From lscpu:
```

(Continued on next page)

Platform Notes (Continued)

```
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                96
      On-line CPU(s) list:   0-95
      Thread(s) per core:    2
      Core(s) per socket:    24
      Socket(s):             2
      NUMA node(s):          4
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Gold 5220R CPU @ 2.20GHz
      Stepping:              7
      CPU MHz:               2174.056
      CPU max MHz:           4000.0000
      CPU min MHz:           1000.0000
      BogoMIPS:              4400.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              36608K
      NUMA node0 CPU(s):     0-3,7,8,12-14,18-20,48-51,55,56,60-62,66-68
      NUMA node1 CPU(s):     4-6,9-11,15-17,21-23,52-54,57-59,63-65,69-71
      NUMA node2 CPU(s):     24-27,31-33,37-39,43,44,72-75,79-81,85-87,91,92
      NUMA node3 CPU(s):     28-30,34-36,40-42,45-47,76-78,82-84,88-90,93-95
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
      invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
      flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
      cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
      avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
      cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d
      arch_capabilities

  /proc/cpuinfo cache data
     cache size : 36608 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 4 nodes (0-3)
    node 0 cpus: 0 1 2 3 7 8 12 13 14 18 19 20 48 49 50 51 55 56 60 61 62 66 67 68
```

(Continued on next page)

Platform Notes (Continued)

```
   node 0 size: 95077 MB
   node 0 free: 82218 MB
   node 1 cpus: 4 5 6 9 10 11 15 16 17 21 22 23 52 53 54 57 58 59 63 64 65 69 70 71
   node 1 size: 96762 MB
   node 1 free: 86785 MB
   node 2 cpus: 24 25 26 27 31 32 33 37 38 39 43 44 72 73 74 75 79 80 81 85 86 87 91 92
   node 2 size: 96762 MB
   node 2 free: 86556 MB
   node 3 cpus: 28 29 30 34 35 36 40 41 42 45 46 47 76 77 78 82 83 84 88 89 90 93 94 95
   node 3 size: 96734 MB
   node 3 free: 86876 MB
   node distances:
   node   0   1   2   3
     0:  10  11  21  21
     1:  11  10  21  21
     2:  21  21  10  11
     3:  21  21  11  10

 From /proc/meminfo
    MemTotal:       394585612 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    os-release:
       NAME="Red Hat Enterprise Linux"
       VERSION="8.2 (Ootpa)"
       ID="rhel"
       ID_LIKE="fedora"
       VERSION_ID="8.2"
       PLATFORM_ID="platform:el8"
       PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
       ANSI_COLOR="0;31"
    redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
    system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga

 uname -a:
    Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
    x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 itlb_multihit:                          KVM: Vulnerable
 CVE-2018-3620 (L1 Terminal Fault):      Not affected
 Microarchitectural Data Sampling:       Not affected
 CVE-2017-5754 (Meltdown):               Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
 CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                            via prctl and seccomp
 CVE-2017-5753 (Spectre variant 1):        Mitigation: usercopy/swapgs barriers and __user
                                            pointer sanitization
 CVE-2017-5715 (Spectre variant 2):         Mitigation: Enhanced IBRS, IBPB: conditional,
                                            RSB filling
 tsx_async_abort:                           Mitigation: Clear CPU buffers; SMT vulnerable

 run-level 3 Nov 19 16:46

 SPEC is set to: /home/cpu2017
    Filesystem            Type  Size  Used Avail Use% Mounted on
    /dev/mapper/rhel-home xfs   3.1T   69G  3.1T   3% /home

 From /sys/devices/virtual/dmi/id
     BIOS:    American Megatrends Inc. 3.1.5 05/12/2020
     Vendor:  Inspur
     Product: NF5266M5
     Serial:  220984763

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     12x Samsung M393A4K40DB2-CVF 32 GB 2 rank 2933

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C Compiler for applications running on Intel(R) 64, Version
  19.1.2.275 Build 20200604
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version
  19.1.2.275 Build 20200604
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version
  19.1.2.275 Build 20200604
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version
  19.1.2.275 Build 20200604
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version
  19.1.2.275 Build 20200604
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version
  19.1.2.275 Build 20200604
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version
  19.1.2.275 Build 20200604
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version
  19.1.2.275 Build 20200604
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version
  19.1.2.275 Build 20200604
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version
  19.1.2.275 Build 20200604
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using both C and C++:
icpc icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX2 -O3 -ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

Benchmarks using both Fortran and C:
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both C and C++:
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using Fortran, C, and C++:
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

Peak Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using both C and C++:
icpc icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: `basepeak = yes`

538.imagick_r: `basepeak = yes`

544.nab_r: `basepeak = yes`

C++ benchmarks:

508.namd_r: `basepeak = yes`

510.parest_r: `-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

Fortran benchmarks:

503.bwaves_r: `-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs -xCORE-AVX2 -O3 -ipo -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -mbranches-within-32B-boundaries -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

549.fotonik3d_r: `basepeak = yes`

554.roms_r: `Same as 503.bwaves_r`

Benchmarks using both Fortran and C:

521.wrf_r: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2 -O3 -ipo -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries -nostandard-realloc-lhs -align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

527.cam4_r: `basepeak = yes`

Benchmarks using both C and C++:

(Continued on next page)

Peak Optimization Flags (Continued)

511.povray_r: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2 -O3 -ipo -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

526.blender_r: `basepeak = yes`

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at

`http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.html`
`http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.9.html`

You can also download the XML flags sources by saving the following links:

`http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.xml`
`http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.9.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-11-19 21:09:26-0500.
Report generated on 2021-01-19 16:57:12 by CPU2017 PS formatter v6255.
Originally published on 2021-01-19.