# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850 V2
(2.60 GHz, Intel Xeon Platinum 8376H)

SPECspeed®2017_fp_base = 245

SPECspeed®2017_fp_peak = Not Run

**CPU2017 License:** 9017
**Test Sponsor:** Lenovo Global Technology
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2020
**Hardware Availability:** Nov-2020
**Software Availability:** Aug-2020

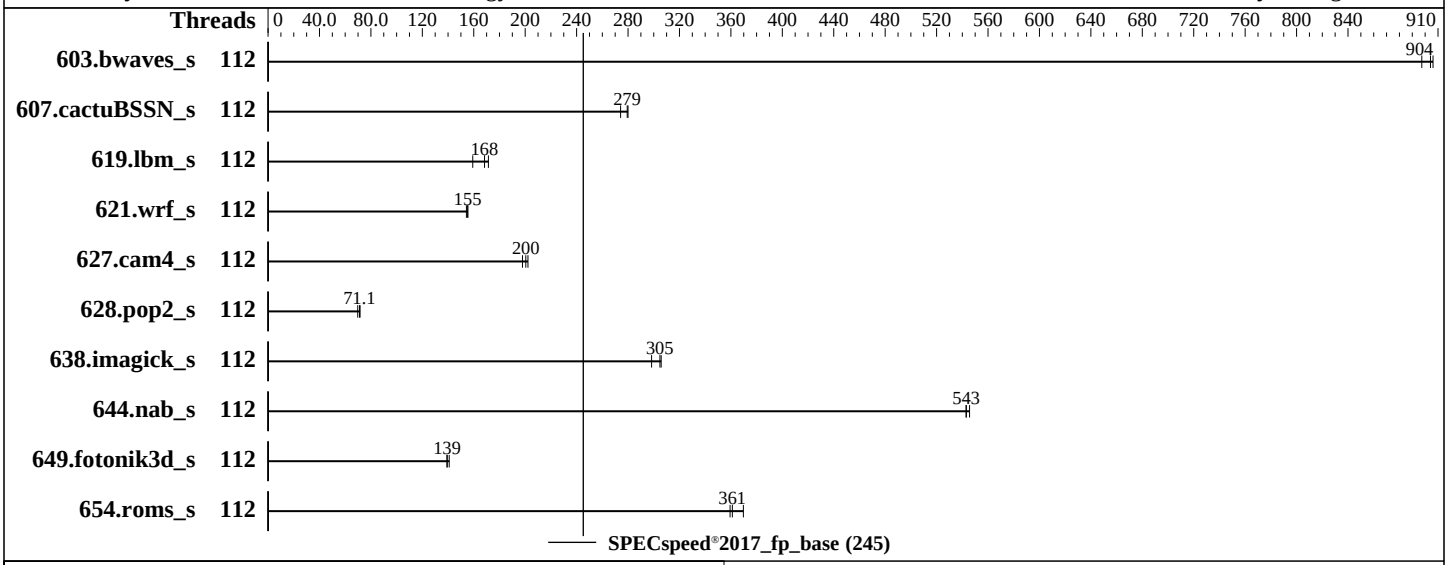


### Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon Platinum 8376H |
| Max MHz: | 4300 |
| Nominal: | 2600 |
| Enabled: | 112 cores, 4 chips |
| Orderable: | 2,4 chips |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 1 MB I+D on chip per core |
| L3: | 38.5 MB I+D on chip per chip |
| Other: | None |
| Memory: | 1536 GB (48 x 32 GB 2Rx8 PC4-3200AA-R) |
| Storage: | 1 x 960 GB SATA SSD |
| Other: | None |

### Software

| | |
|---|---|
| OS: | Red Hat Enterprise Linux 8.2 (Ootpa)<br>Kernel 4.18.0-193.el8.x86_64 |
| Compiler: | C/C++: Version 19.1.2.275 of Intel C/C++ Compiler for Linux;<br>Fortran: Version 19.1.2.275 of Intel Fortran Compiler for Linux |
| Parallel: | Yes |
| Firmware: | Lenovo BIOS Version M5E107I 1.01 released Nov-2020 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | Not Applicable |
| Other: | jemalloc memory allocator V5.0.1 |
| Power Management: | BIOS set to prefer performance at the cost of additional power usage |

# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850 V2
(2.60 GHz, Intel Xeon Platinum 8376H)

SPECspeed®2017_fp_base = 245

SPECspeed®2017_fp_peak = Not Run

**CPU2017 License:** 9017
**Test Sponsor:** Lenovo Global Technology
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2020
**Hardware Availability:** Nov-2020
**Software Availability:** Aug-2020

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 603.bwaves_s | 112 | **65.3** | **904** | 65.7 | 897 | 65.1 | 906 | | | | | | | |
| 607.cactuBSSN_s | 112 | 59.5 | 280 | **59.7** | **279** | 60.8 | 274 | | | | | | | |
| 619.lbm_s | 112 | **31.1** | **168** | 30.6 | 171 | 32.9 | 159 | | | | | | | |
| 621.wrf_s | 112 | 85.1 | 155 | **85.2** | **155** | 85.7 | 154 | | | | | | | |
| 627.cam4_s | 112 | 44.8 | 198 | 43.8 | 202 | **44.2** | **200** | | | | | | | |
| 628.pop2_s | 112 | 166 | 71.6 | **167** | **71.1** | 170 | 69.8 | | | | | | | |
| 638.imagick_s | 112 | 47.2 | 306 | 48.4 | 298 | **47.3** | **305** | | | | | | | |
| 644.nab_s | 112 | **32.2** | **543** | 32.0 | 546 | 32.2 | 543 | | | | | | | |
| 649.fotonik3d_s | 112 | 65.5 | 139 | **65.4** | **139** | 64.7 | 141 | | | | | | | |
| 654.roms_s | 112 | 42.6 | 370 | 43.8 | 359 | **43.6** | **361** | | | | | | | |

**SPECspeed®2017_fp_base = 245**

**SPECspeed®2017_fp_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH =
     "/home/cpu2017-1.1.0-ic19.1u2/lib/intel64:/home/cpu2017-1.1.0-ic19.1u2/j
     e5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

```
 Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
 memory using Redhat Enterprise Linux 8.0
 Transparent Huge Pages disabled by default
 echo never > /sys/kernel/mm/transparent_hugepage/enabled
 echo never > /sys/kernel/mm/transparent_hugepage/defrag
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
```

**(Continued on next page)**

## General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

## Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance and then set it to Custom Mode
MONITOR/MWAIT set to Enabled
Hyper-Threading set to Disabled
Adjacent Cache Prefetch set to Disabled

 Sysinfo program /home/cpu2017-1.1.0-ic19.1u2/bin/sysinfo
 Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
 running on localhost.localdomain Fri Dec 18 18:39:55 2020

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8376H CPU @ 2.60GHz
       4  "physical id"s (chips)
       112 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 28
       siblings  : 28
       physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30

 From lscpu:
      Architecture:        x86_64
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
      CPU(s):              112
      On-line CPU(s) list: 0-111
      Thread(s) per core:  1
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      Core(s) per socket:  28
      Socket(s):           4
      NUMA node(s):        4
      Vendor ID:           GenuineIntel
      CPU family:          6
      Model:               85
      Model name:          Intel(R) Xeon(R) Platinum 8376H CPU @ 2.60GHz
      Stepping:            11
      CPU MHz:             2114.425
      CPU max MHz:         4300.0000
      CPU min MHz:         1000.0000
      BogoMIPS:            5200.00
      Virtualization:      VT-x
      L1d cache:           32K
      L1i cache:           32K
      L2 cache:            1024K
      L3 cache:            39424K
      NUMA node0 CPU(s):   0-27
      NUMA node1 CPU(s):   28-55
      NUMA node2 CPU(s):   56-83
      NUMA node3 CPU(s):   84-111
      Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
      invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
      flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
      cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
      avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
      cqm_mbm_local avx512_bf16 dtherm ida arat pln pts pku ospke avx512_vnni md_clear
      flush_l1d arch_capabilities

  /proc/cpuinfo cache data
     cache size : 39424 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 4 nodes (0-3)
    node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
    node 0 size: 386654 MB
    node 0 free: 386432 MB
    node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
    53 54 55
    node 1 size: 387038 MB
    node 1 free: 386817 MB
```

**(Continued on next page)**

## Platform Notes (Continued)

```
  node 2 cpus: 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80
  81 82 83
  node 2 size: 387065 MB
  node 2 free: 386616 MB
  node 3 cpus: 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105
  106 107 108 109 110 111
  node 3 size: 387065 MB
  node 3 free: 386556 MB
  node distances:
  node   0   1   2   3
    0:  10  20  20  20
    1:  20  10  20  20
    2:  20  20  10  20
    3:  20  20  20  10

From /proc/meminfo
   MemTotal:       1584971180 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux"
      VERSION="8.2 (Ootpa)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="8.2"
      PLATFORM_ID="platform:el8"
      PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
      ANSI_COLOR="0;31"
   redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
   system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga

uname -a:
   Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

itlb_multihit:                          Not affected
CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:       Not affected
CVE-2017-5754 (Meltdown):               Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                         via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: usercopy/swapgs barriers and __user
```

**(Continued on next page)**

## Platform Notes (Continued)

```
                                        pointer sanitization
 CVE-2017-5715 (Spectre variant 2):     Mitigation: Enhanced IBRS, IBPB: conditional,
                                        RSB filling
 tsx_async_abort:                       Not affected

 run-level 3 Dec 18 18:36

 SPEC is set to: /home/cpu2017-1.1.0-ic19.1u2
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda2      xfs   838G   52G  786G   7% /home

 From /sys/devices/virtual/dmi/id
     BIOS:    Lenovo M5E107I-1.01 11/02/2020
     Vendor:  Lenovo
     Product: ThinkSystem SR850 V2
     Product Family: ThinkSystem
     Serial:  none

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     48x Samsung M393A4G43AB3-CWE 32 GB 2 rank 3200

 (End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
C               | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 607.cactuBSSN_s(base)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
icc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

## Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64

**(Continued on next page)**

## Base Portability Flags (Continued)

621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-m64 -std=c11 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries

Fortran benchmarks:
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-nostandard-realloc-lhs -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using Fortran, C, and C++:
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.html
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Cooperlake-A.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.xml
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Cooperlake-A.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.


Tested with SPEC CPU®2017 v1.1.0 on 2020-12-18 05:39:54-0500.
Report generated on 2021-01-19 16:57:39 by CPU2017 PS formatter v6255.
Originally published on 2021-01-19.