SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

R272-Z30
(AMD EPYC 7713 , 2.00GHz)

SPECrate®2017_int_base = 384

SPECrate®2017_int_peak = 407

CPU2017 License: 9082
Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.
Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Feb-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

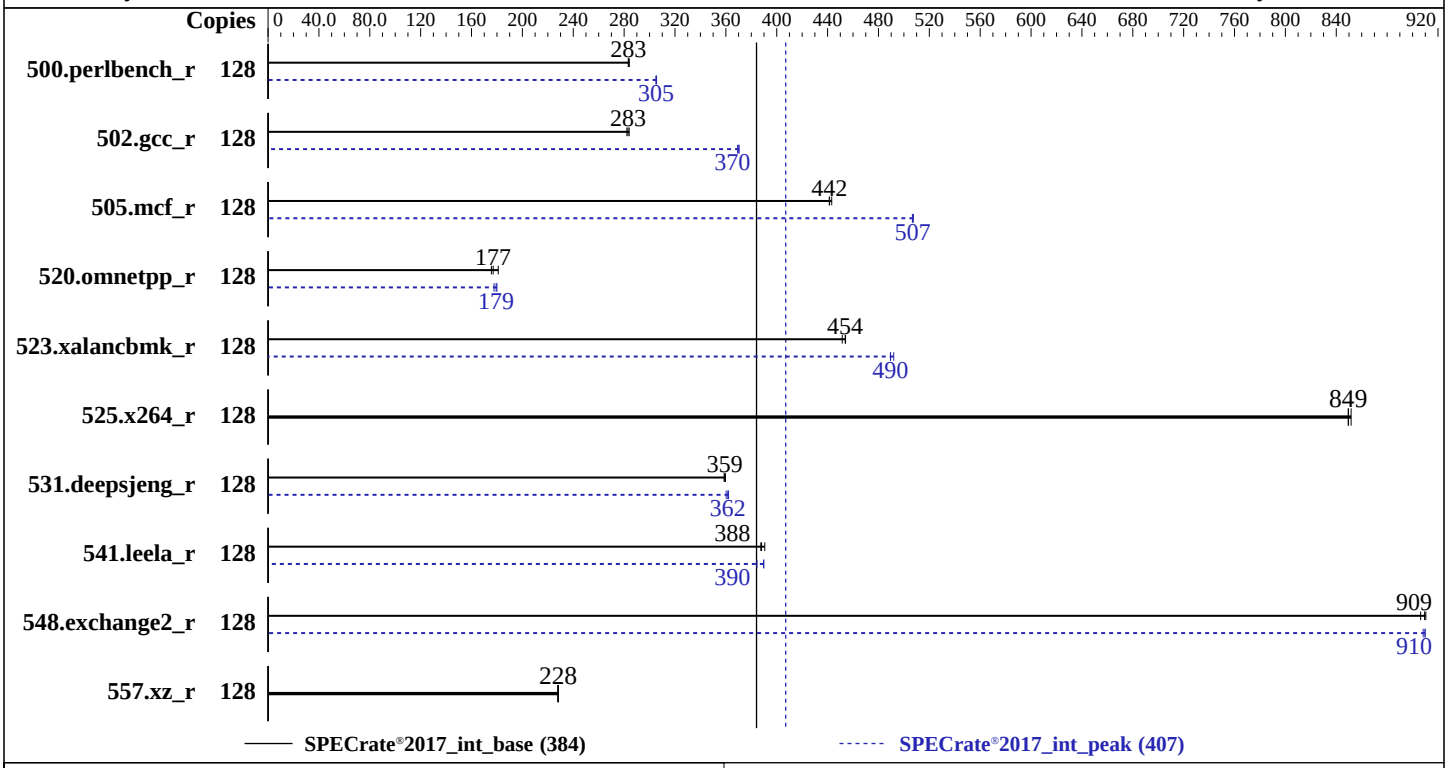

Hardware

CPU Name:	AMD EPYC 7713
Max MHz:	3675
Nominal:	2000
Enabled:	64 cores, 1 chip, 2 threads/core
Orderable:	1 chip
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	256 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	512 GB (8 x 64 GB 4DRx16 PC4-3200AA-L)
Storage:	1 x 1.92 TB SATA SSD
Other:	None

Software

OS:	Ubuntu 20.04.1 LTS (x86_64) Kernel 5.4.0-65-generic
Compiler:	C/C++/Fortran: Version 3.0.0 of AOCC
Parallel:	No
Firmware:	Version M02 released Feb-2021
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc: jemalloc memory allocator library v5.1.0;
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
R272-Z30
(AMD EPYC 7713 , 2.00GHz)

SPECrate®2017_int_base = 384

SPECrate®2017_int_peak = 407

CPU2017 License: 9082
Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.
Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Feb-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	717	284	**719**	**283**	719	283	128	667	306	**668**	**305**	668	305
502.gcc_r	128	**640**	**283**	642	282	638	284	128	489	370	491	369	**490**	**370**
505.mcf_r	128	467	443	469	441	**468**	**442**	128	408	507	408	507	**408**	**507**
520.omnetpp_r	128	956	176	**949**	**177**	928	181	128	**936**	**179**	933	180	945	178
523.xalancbmk_r	128	298	454	299	452	**298**	**454**	128	276	489	275	492	**276**	**490**
525.x264_r	128	**264**	**849**	263	852	264	849	128	**264**	**849**	263	852	264	849
531.deepsjeng_r	128	**408**	**359**	408	360	409	359	128	405	362	**406**	**362**	407	360
541.leela_r	128	543	391	**546**	**388**	547	387	128	**544**	**390**	551	384	544	390
548.exchange2_r	128	**369**	**909**	370	906	368	910	128	369	910	**369**	**910**	369	908
557.xz_r	128	605	228	607	228	**606**	**228**	128	605	228	607	228	**606**	**228**

SPECrate®2017_int_base = 384

SPECrate®2017_int_peak = 407

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu
ASLR is disabled to reduce run-to-run issues.

dirty_ratio, swappiness, zone_reclaim_mode, drop_caches and ASLR were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root for peak
integer runs and all FP runs to enable Transparent Hugepages (THP).
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root for base
integer runs to enable THP only on request.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/cpu2017/amd_rate_aocc300_milan_A_lib/64;/cpu2017/amd_rate_aocc300_mila
     n_A_lib/32:"
MALLOC_CONF = "retain:true"

Environment variables set by runcpu during the 523.xalancbmk_r peak run:
MALLOC_CONF = "thp:never"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 512GiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2
```

Platform Notes

```
 BIOS settings:
 cTDP = 240
 Determinism Slider set to Power
 SMT set to auto
 IOMMU set to enable
 Package Power Limit set to 240
 NUMA nodes per socket set to NPS4

 Sysinfo program /cpu2017/bin/sysinfo
 Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
 running on test Tue Feb  2 13:12:45 2021

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo
```

(Continued on next page)

Platform Notes (Continued)

```
From /proc/cpuinfo
   model name : AMD EPYC 7713 64-Core Processor
      1  "physical id"s (chips)
      128 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 64
      siblings  : 128
      physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
      25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
      53 54 55 56 57 58 59 60 61 62 63

From lscpu:
     Architecture:                    x86_64
     CPU op-mode(s):                  32-bit, 64-bit
     Byte Order:                      Little Endian
     Address sizes:                   48 bits physical, 48 bits virtual
     CPU(s):                          128
     On-line CPU(s) list:             0-127
     Thread(s) per core:              2
     Core(s) per socket:              64
     Socket(s):                       1
     NUMA node(s):                    4
     Vendor ID:                       AuthenticAMD
     CPU family:                      25
     Model:                           1
     Model name:                      AMD EPYC 7713 64-Core Processor
     Stepping:                        1
     Frequency boost:                 enabled
     CPU MHz:                         2763.842
     CPU max MHz:                     2000.0000
     CPU min MHz:                     1500.0000
     BogoMIPS:                        4000.16
     Virtualization:                  AMD-V
     L1d cache:                       2 MiB
     L1i cache:                       2 MiB
     L2 cache:                        32 MiB
     L3 cache:                        256 MiB
     NUMA node0 CPU(s):               0-15,64-79
     NUMA node1 CPU(s):               16-31,80-95
     NUMA node2 CPU(s):               32-47,96-111
     NUMA node3 CPU(s):               48-63,112-127
     Vulnerability Itlb multihit:     Not affected
     Vulnerability L1tf:              Not affected
     Vulnerability Mds:               Not affected
     Vulnerability Meltdown:          Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
      Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
      prctl and seccomp
      Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user
      pointer sanitization
      Vulnerability Spectre v2:        Mitigation; Full AMD retpoline, IBPB conditional,
      IBRS_FW, STIBP always-on, RSB filling
      Vulnerability Srbds:             Not affected
      Vulnerability Tsx async abort:   Not affected
      Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
      pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
      pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
      aperfmperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes
      xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
      misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
      bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
      ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx
      smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
      cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock
      nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
      v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

  /proc/cpuinfo cache data
     cache size : 512 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 4 nodes (0-3)
    node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 64 65 66 67 68 69 70 71 72 73 74 75
    76 77 78 79
    node 0 size: 128893 MB
    node 0 free: 128449 MB
    node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 80 81 82 83 84 85 86 87 88
    89 90 91 92 93 94 95
    node 1 size: 129015 MB
    node 1 free: 128573 MB
    node 2 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 96 97 98 99 100 101 102
    103 104 105 106 107 108 109 110 111
    node 2 size: 129015 MB
    node 2 free: 128662 MB
    node 3 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 112 113 114 115 116 117
    118 119 120 121 122 123 124 125 126 127
    node 3 size: 128978 MB
    node 3 free: 128601 MB
    node distances:
    node   0   1   2   3
      0:  10  12  12  12
      1:  12  10  12  12
```

(Continued on next page)

Platform Notes (Continued)

```
     2:  12  12  10  12
     3:  12  12  12  10

  From /proc/meminfo
     MemTotal:       528285076 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
     performance

  /usr/bin/lsb_release -d
     Ubuntu 20.04.1 LTS

  From /etc/*release* /etc/*version*
     debian_version: bullseye/sid
     os-release:
        NAME="Ubuntu"
        VERSION="20.04.1 LTS (Focal Fossa)"
        ID=ubuntu
        ID_LIKE=debian
        PRETTY_NAME="Ubuntu 20.04.1 LTS"
        VERSION_ID="20.04"
        HOME_URL="https://www.ubuntu.com/"
        SUPPORT_URL="https://help.ubuntu.com/"

  uname -a:
     Linux test 5.4.0-65-generic #73-Ubuntu SMP Mon Jan 18 17:25:17 UTC 2021 x86_64 x86_64
     x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2018-12207 (iTLB Multihit):                          Not affected
  CVE-2018-3620 (L1 Terminal Fault):                       Not affected
  Microarchitectural Data Sampling:                        Not affected
  CVE-2017-5754 (Meltdown):                                Not affected
  CVE-2018-3639 (Speculative Store Bypass):                Mitigation: Speculative Store
                                                           Bypass disabled via prctl and
                                                           seccomp
  CVE-2017-5753 (Spectre variant 1):                       Mitigation: usercopy/swapgs
                                                           barriers and __user pointer
                                                           sanitization
  CVE-2017-5715 (Spectre variant 2):                       Mitigation: Full AMD retpoline,
                                                         IBPB: conditional, IBRS_FW, STIBP:
                                                           always-on, RSB filling
  CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
  CVE-2019-11135 (TSX Asynchronous Abort):                 Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
 run-level 5 Feb 2 21:03

 SPEC is set to: /cpu2017
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda2      ext4  1.8T   17G  1.7T   1% /

 From /sys/devices/virtual/dmi/id
     Vendor:         GIGABYTE
     Product:        R272-Z30-00
     Product Family: Server
     Serial:         0123456789012345678 9AB

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     8x Samsung M386A8K40DM2-CWE 64 GB 4 rank 3200
     8x Unknown Unknown

 BIOS:
    BIOS Vendor:       GIGABYTE
    BIOS Version:      M02
    BIOS Date:         02/01/2021
    BIOS Revision:     5.21

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
```

(Continued on next page)

Compiler Version Notes (Continued)

```
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
C++     | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti

C++ benchmarks:
-m64 -std=c++98 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm
-ljemalloc -lflang -lflangrti

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks (continued):
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -z muldefs -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang -lflangrti

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: `-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -fprofile-instr-generate`(pass 1) `-fprofile-instr-use`(pass 2) `-Ofast -march=znver3 -fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization -mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=false -mllvm -function-specialize -mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc`

502.gcc_r: `-m32 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3 -fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization -mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true -mllvm -function-specialize -mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -fgnu89-inline -ljemalloc`

505.mcf_r: `-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3 -fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization -mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true -mllvm -function-specialize -mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc`

525.x264_r: `basepeak = yes`

557.xz_r: `basepeak = yes`

C++ benchmarks:

(Continued on next page)

Peak Optimization Flags (Continued)

520.omnetpp_r: -m64 -std=c++98
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -ljemalloc

523.xalancbmk_r: -m32 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-ljemalloc

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang -lflangrti

Peak Other Flags

C benchmarks (except as noted below):
`-Wno-unused-command-line-argument`

502.gcc_r: `-L/usr/lib -Wno-unused-command-line-argument -L/sppo/bin/cpu2017v115aocc3/amd_rate_aocc300_milan_A_lib/32`

C++ benchmarks (except as noted below):
`-Wno-unused-command-line-argument`

523.xalancbmk_r: `-L/usr/lib -Wno-unused-command-line-argument -L/sppo/bin/cpu2017v115aocc3/amd_rate_aocc300_milan_A_lib/32`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html`
`http://www.spec.org/cpu2017/flags/GIGA-BYTE-Platform-SPECcpu2017-Flags-V1.2-Milan.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml`
`http://www.spec.org/cpu2017/flags/GIGA-BYTE-Platform-SPECcpu2017-Flags-V1.2-Milan.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2021-02-02 08:12:44-0500.
Report generated on 2021-03-17 11:02:01 by CPU2017 PS formatter v6255.
Originally published on 2021-03-16.