SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
2.45 GHz, AMD EPYC 7763

SPECspeed®2017_fp_base = 248

SPECspeed®2017_fp_peak = 264

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Feb-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

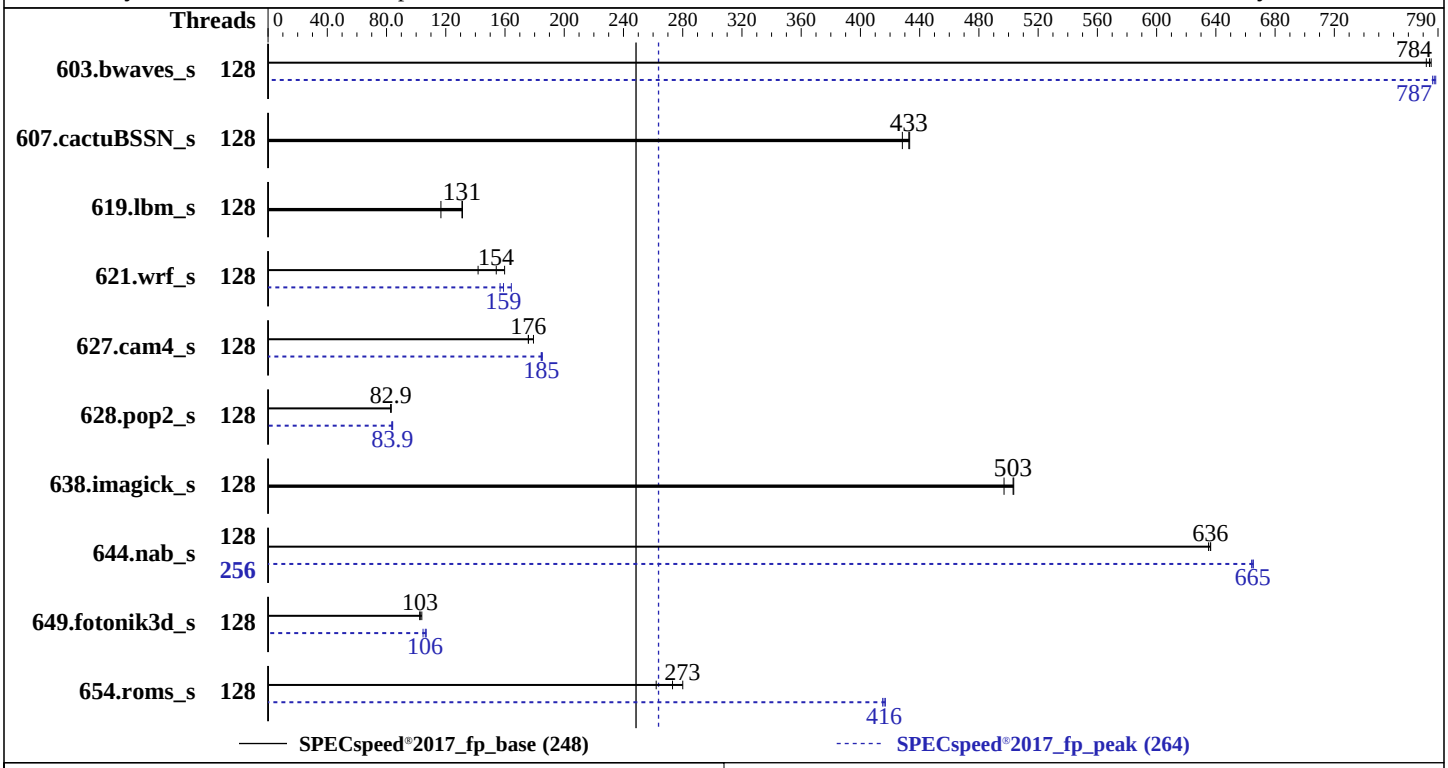

Hardware

CPU Name:	AMD EPYC 7763
Max MHz:	3500
Nominal:	2450
Enabled:	128 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	256 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)
Storage:	1 x 1 TB SATA SSD
Other:	None

Software

OS:	Ubuntu 20.04 LTS (x86_64) Kernel 5.4.0-64-generic
Compiler:	C/C++/Fortran: Version 3.0.0 of AOCC
Parallel:	Yes
Firmware:	Version 0404 released Feb-2021
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc: jemalloc memory allocator library v5.1.0
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	128	75.1	785	75.4	782	**75.2**	**784**	128	75.0	786	**74.9**	**787**	74.8	788
607.cactuBSSN_s	128	**38.5**	**433**	38.5	433	38.9	428	128	**38.5**	**433**	38.5	433	38.9	428
619.lbm_s	128	39.9	131	**40.0**	**131**	44.9	117	128	39.9	131	**40.0**	**131**	44.9	117
621.wrf_s	128	**85.8**	**154**	93.3	142	82.8	160	128	**83.2**	**159**	80.5	164	84.4	157
627.cam4_s	128	**50.4**	**176**	50.4	176	49.5	179	128	**48.0**	**185**	47.8	185	48.1	184
628.pop2_s	128	**143**	**82.9**	143	82.9	143	83.1	128	141	84.2	142	83.5	**141**	**83.9**
638.imagick_s	128	**28.7**	**503**	29.0	497	28.7	504	128	**28.7**	**503**	29.0	497	28.7	504
644.nab_s	128	27.4	637	27.5	635	**27.5**	**636**	256	**26.3**	**665**	26.3	664	26.3	665
649.fotonik3d_s	128	87.8	104	**88.7**	**103**	89.0	102	128	**85.9**	**106**	85.4	107	87.1	105
654.roms_s	128	56.2	280	**57.6**	**273**	60.1	262	128	37.9	415	37.8	417	**37.9**	**416**

SPECspeed®2017_fp_base = 248

SPECspeed®2017_fp_peak = 264

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of
memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum
necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory
and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout
randomization (ASLR) to reduce run-to-run variability.
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root to enable
```

(Continued on next page)

Operating System Notes (Continued)

```
Transparent Hugepages (THP) for this run.
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root for peak
runs of 628.pop2_s and 638.imagick_s to enable THP only on request.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-255"
LD_LIBRARY_PATH =
     "/spec2017A1/amd_speed_aocc300_milan_A_lib/64;/spec2017A1/amd_speed_aocc
     300_milan_A_lib/32:"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "256"

Environment variables set by runcpu during the 603.bwaves_s peak run:
GOMP_CPU_AFFINITY = "0-127"

Environment variables set by runcpu during the 621.wrf_s peak run:
GOMP_CPU_AFFINITY = "0-127"

Environment variables set by runcpu during the 627.cam4_s peak run:
GOMP_CPU_AFFINITY = "0-127"

Environment variables set by runcpu during the 628.pop2_s peak run:
GOMP_CPU_AFFINITY = "0-127"

Environment variables set by runcpu during the 644.nab_s peak run:
GOMP_CPU_AFFINITY = "0 128 1 129 2 130 3 131 4 132 5 133 6 134 7 135 8 136 9
     137 10 138 11 139 12 140 13 141 14 142 15 143 16 144 17 145 18 146 19
     147 20 148 21 149 22 150 23 151 24 152 25 153 26 154 27 155 28 156 29
     157 30 158 31 159 32 160 33 161 34 162 35 163 36 164 37 165 38 166 39
     167 40 168 41 169 42 170 43 171 44 172 45 173 46 174 47 175 48 176 49
     177 50 178 51 179 52 180 53 181 54 182 55 183 56 184 57 185 58 186 59
     187 60 188 61 189 62 190 63 191 64 192 65 193 66 194 67 195 68 196 69
     197 70 198 71 199 72 200 73 201 74 202 75 203 76 204 77 205 78 206 79
     207 80 208 81 209 82 210 83 211 84 212 85 213 86 214 87 215 88 216 89
     217 90 218 91 219 92 220 93 221 94 222 95 223 96 224 97 225 98 226 99
     227 100 228 101 229 102 230 103 231 104 232 105 233 106 234 107 235 108
     236 109 237 110 238 111 239 112 240 113 241 114 242 115 243 116 244 117
     245 118 246 119 247 120 248 121 249 122 250 123 251 124 252 125 253 126
     254 127 255"

Environment variables set by runcpu during the 649.fotonik3d_s peak run:
```

(Continued on next page)

Environment Variables Notes (Continued)

```
GOMP_CPU_AFFINITY = "0-127"
PGHPF_ZMEM = "yes"

Environment variables set by runcpu during the 654.roms_s peak run:
GOMP_CPU_AFFINITY = "0-127"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2
```

Platform Notes

```
BIOS Configuration:
DLWM Support = Disabled
SVM Mode = Disabled
NUMA nodes per socket = NPS2
APBDIS = 1
Fix SOC P-state = P0
Engine Boost = Enabled

 Sysinfo program /spec2017A1/bin/sysinfo
 Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
 running on test3 Wed Feb 17 22:25:31 2021

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD EPYC 7763 64-Core Processor
       2  "physical id"s (chips)
       256 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
```

(Continued on next page)

Platform Notes (Continued)

```
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 64
       siblings  : 128
       physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
       53 54 55 56 57 58 59 60 61 62 63
       physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
       53 54 55 56 57 58 59 60 61 62 63

  From lscpu:
       Architecture:                    x86_64
       CPU op-mode(s):                  32-bit, 64-bit
       Byte Order:                      Little Endian
       Address sizes:                   48 bits physical, 48 bits virtual
       CPU(s):                          256
       On-line CPU(s) list:             0-255
       Thread(s) per core:              2
       Core(s) per socket:              64
       Socket(s):                       2
       NUMA node(s):                    4
       Vendor ID:                       AuthenticAMD
       CPU family:                      25
       Model:                           1
       Model name:                      AMD EPYC 7763 64-Core Processor
       Stepping:                        1
       Frequency boost:                 enabled
       CPU MHz:                         1817.784
       CPU max MHz:                     2450.0000
       CPU min MHz:                     1500.0000
       BogoMIPS:                        4949.32
       Virtualization:                  AMD-V
       L1d cache:                       4 MiB
       L1i cache:                       4 MiB
       L2 cache:                        64 MiB
       L3 cache:                        512 MiB
       NUMA node0 CPU(s):               0-31,128-159
       NUMA node1 CPU(s):               32-63,160-191
       NUMA node2 CPU(s):               64-95,192-223
       NUMA node3 CPU(s):               96-127,224-255
       Vulnerability Itlb multihit:     Not affected
       Vulnerability L1tf:              Not affected
       Vulnerability Mds:               Not affected
       Vulnerability Meltdown:          Not affected
       Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
       prctl and seccomp
       Vulnerability Spectre v1:         Mitigation; usercopy/swapgs barriers and __user
```

(Continued on next page)

Platform Notes (Continued)

```
      pointer sanitization
      Vulnerability Spectre v2:        Mitigation; Full AMD retpoline, IBPB conditional,
      IBRS_FW, STIBP always-on, RSB filling
      Vulnerability Srbds:             Not affected
      Vulnerability Tsx async abort:   Not affected
      Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
      pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
      pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
      aperfmperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
      popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
      misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
      bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
      ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx
      smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
      cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock
      nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
      v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

  /proc/cpuinfo cache data
     cache size : 512 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 4 nodes (0-3)
    node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
    28 29 30 31 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146
    147 148 149 150 151 152 153 154 155 156 157 158 159
    node 0 size: 257863 MB
    node 0 free: 257007 MB
    node 1 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56
    57 58 59 60 61 62 63 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175
    176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191
    node 1 size: 258019 MB
    node 1 free: 257235 MB
    node 2 cpus: 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88
    89 90 91 92 93 94 95 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207
    208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223
    node 2 size: 258031 MB
    node 2 free: 257297 MB
    node 3 cpus: 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114
    115 116 117 118 119 120 121 122 123 124 125 126 127 224 225 226 227 228 229 230 231 232
    233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254
    255
    node 3 size: 258029 MB
    node 3 free: 257177 MB
    node distances:
    node   0   1   2   3
```

(Continued on next page)

Platform Notes (Continued)

```
     0:  10  12  32  32
     1:  12  10  32  32
     2:  32  32  10  12
     3:  32  32  12  10

  From /proc/meminfo
     MemTotal:       1056712356 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
     performance

  /usr/bin/lsb_release -d
     Ubuntu 20.04 LTS

  From /etc/*release* /etc/*version*
     debian_version: bullseye/sid
     os-release:
        NAME="Ubuntu"
        VERSION="20.04 LTS (Focal Fossa)"
        ID=ubuntu
        ID_LIKE=debian
        PRETTY_NAME="Ubuntu 20.04 LTS"
        VERSION_ID="20.04"
        HOME_URL="https://www.ubuntu.com/"
        SUPPORT_URL="https://help.ubuntu.com/"

  uname -a:
     Linux test3 5.4.0-64-generic #72-Ubuntu SMP Fri Jan 15 10:27:54 UTC 2021 x86_64 x86_64
     x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2018-12207 (iTLB Multihit):                    Not affected
  CVE-2018-3620 (L1 Terminal Fault):                 Not affected
  Microarchitectural Data Sampling:                  Not affected
  CVE-2017-5754 (Meltdown):                          Not affected
  CVE-2018-3639 (Speculative Store Bypass):          Mitigation: Speculative Store
                                                     Bypass disabled via prctl and
                                                     seccomp
  CVE-2017-5753 (Spectre variant 1):                 Mitigation: usercopy/swapgs
                                                     barriers and __user pointer
                                                     sanitization
  CVE-2017-5715 (Spectre variant 2):                 Mitigation: Full AMD retpoline,
                                                    IBPB: conditional, IBRS_FW, STIBP:
                                                     always-on, RSB filling
```

(Continued on next page)

Platform Notes (Continued)

```
 CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
 CVE-2019-11135 (TSX Asynchronous Abort):               Not affected

 run-level 5 Feb 17 13:50

 SPEC is set to: /spec2017A1
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sdb2      ext4  938G   25G  866G   3% /

 From /sys/devices/virtual/dmi/id
     Vendor:          ASUSTeK COMPUTER INC.
     Product:         RS700A-E11-RS12U
     Product Family: Server
     Serial:          123456789ABCDEF

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     16x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200
     16x Unknown Unknown

 BIOS:
    BIOS Vendor:       American Megatrends Inc.
    BIOS Version:      0404
    BIOS Date:         02/02/2021
    BIOS Revision:     4.4

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
                | 644.nab_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                | 654.roms_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                | 628.pop2_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti

Fortran benchmarks:
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks (continued):
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti

Benchmarks using both Fortran and C:
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti

Benchmarks using Fortran, C, and C++:
-m64 -mno-adx -mno-sse4a -std=c++98
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -lsr-in-nested-loop -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti

Base Other Flags

C benchmarks:
`-Wno-unused-command-line-argument -Wno-return-type`

Fortran benchmarks:
`-Wno-unused-command-line-argument -Wno-return-type`

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument -Wno-return-type`

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument -Wno-return-type`

Peak Compiler Invocation

C benchmarks:
`clang`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

619.lbm_s: `basepeak = yes`

638.imagick_s: `basepeak = yes`

644.nab_s: `-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3`

(Continued on next page)

Peak Optimization Flags (Continued)

644.nab_s (continued):
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

Fortran benchmarks:

603.bwaves_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang

649.fotonik3d_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang

654.roms_s: Same as 603.bwaves_s

Benchmarks using both Fortran and C:

621.wrf_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto

(Continued on next page)

Peak Optimization Flags (Continued)

621.wrf_s (continued):
-fstruct-layout=5 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -Hz,1,0x1 -O3
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang

627.cam4_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=5 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -Mrecursive
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang

628.pop2_s: Same as 627.cam4_s

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

Peak Other Flags

C benchmarks:
-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:
-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using both Fortran and C:
-Wno-unused-command-line-argument -Wno-return-type

(Continued on next page)

Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument -Wno-return-type`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-Milan-V1.2.html`
`http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-Milan-V1.2.xml`
`http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2021-02-17 17:25:30-0500.
Report generated on 2021-03-16 15:24:04 by CPU2017 PS formatter v6255.
Originally published on 2021-03-16.