SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7525 (AMD EPYC 7543 32-Core Processor)

SPECspeed®2017_int_base = 12.5

SPECspeed®2017_int_peak = 12.6

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

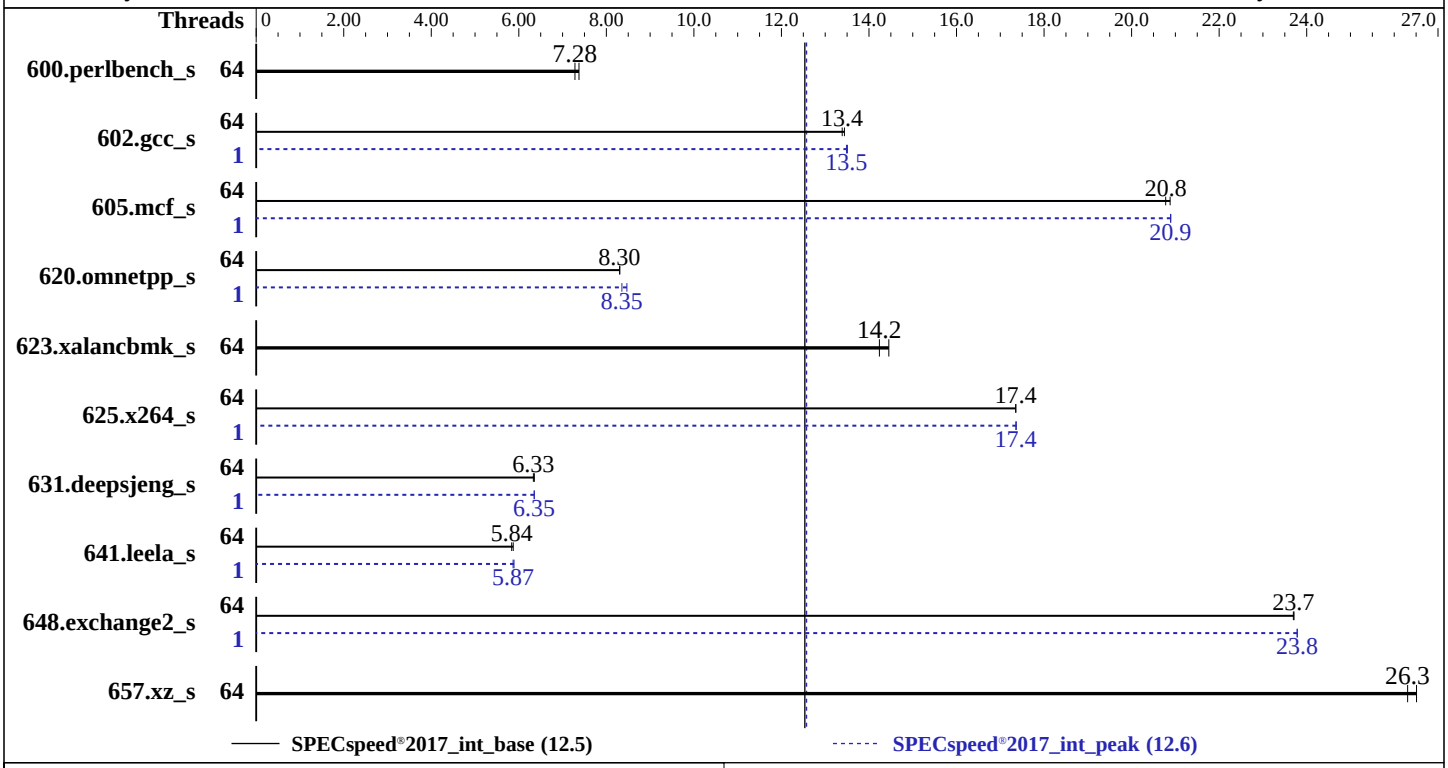

Hardware

CPU Name:	AMD EPYC 7543
Max MHz:	3700
Nominal:	2800
Enabled:	64 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	256 MB I+D on chip per chip, 32 MB shared / 4 cores
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)
Storage:	225 GB on tmpfs
Other:	None

Software

OS:	Red Hat Enterprise Linux 8.3 (Ootpa) 4.18.0-240.10.1.el8_3.x86_64
Compiler:	C/C++/Fortran: Version 3.0.0 of AOCC
Parallel:	Yes
Firmware:	Version 2.0.3 released Jan-2021
File System:	tmpfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc: jemalloc memory allocator library v5.1.0
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7525 (AMD EPYC 7543 32-Core Processor)

SPECspeed®2017_int_base = 12.5

SPECspeed®2017_int_peak = 12.6

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	64	**244**	**7.28**	241	7.37			64	**244**	**7.28**	241	7.37		
602.gcc_s	64	296	13.4	**297**	**13.4**			1	295	13.5	**295**	**13.5**		
605.mcf_s	64	226	20.9	**227**	**20.8**			1	226	20.9	**226**	**20.9**		
620.omnetpp_s	64	**196**	**8.30**	196	8.31			1	**195**	**8.35**	193	8.47		
623.xalancbmk_s	64	98.0	14.5	**99.5**	**14.2**			64	98.0	14.5	**99.5**	**14.2**		
625.x264_s	64	102	17.4	**102**	**17.4**			1	**102**	**17.4**	102	17.4		
631.deepsjeng_s	64	**226**	**6.33**	226	6.35			1	**226**	**6.35**	226	6.35		
641.leela_s	64	291	5.87	**292**	**5.84**			1	**291**	**5.87**	290	5.89		
648.exchange2_s	64	124	23.7	**124**	**23.7**			1	**124**	**23.8**	124	23.8		
657.xz_s	64	233	26.5	**235**	**26.3**			64	233	26.5	**235**	**26.3**		

SPECspeed®2017_int_base = 12.5

SPECspeed®2017_int_peak = 12.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of
memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum
necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory
and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout
randomization (ASLR) to reduce run-to-run variability.
```

(Continued on next page)

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root to enable
Transparent Hugepages (THP) for this run.
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root for peak
runs of 628.pop2_s and 638.imagick_s to enable THP only on request.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-63"
LD_LIBRARY_PATH =
     "/mnt/ramdisk/cpu2017-1.1.5/amd_speed_aocc300_milan_B_lib/64;/mnt/ramdis
     k/cpu2017-1.1.5/amd_speed_aocc300_milan_B_lib/32:"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "64"

Environment variables set by runcpu during the 602.gcc_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 620.omnetpp_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 625.x264_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 631.deepsjeng_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 641.leela_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 648.exchange2_s peak run:
GOMP_CPU_AFFINITY = "0"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2
```


(Continued on next page)

General Notes (Continued)

```
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 Benchmark run from a 225 GB ramdisk created with the cmd: "mount -t tmpfs -o size=225G tmpfs /mnt/ramdisk"
jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2
```

Platform Notes

```
BIOS settings:
   Logical processor         : Disabled
   L3 Cache as NUMA Domain   : Enabled
   Virtualization Technology : Disabled
   DRAM Refresh Delay        : Performance
   System Profile            : Custom
      CPU Power Management   : Maximum Performance
      Memory Patrol Scrub    : Disabled
      PCI ASPM L1 Link
         Power Management    : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.5/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on localhost.localdomain Sat Feb 27 11:12:36 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : AMD EPYC 7543 32-Core Processor
      2  "physical id"s (chips)
      64 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 32
      siblings  : 32
      physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
      25 26 27 28 29 30 31
      physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
      25 26 27 28 29 30 31
```

(Continued on next page)

Platform Notes (Continued)

```
 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                64
      On-line CPU(s) list:   0-63
      Thread(s) per core:    1
      Core(s) per socket:    32
      Socket(s):             2
      NUMA node(s):          16
      Vendor ID:             AuthenticAMD
      CPU family:            25
      Model:                 1
      Model name:            AMD EPYC 7543 32-Core Processor
      Stepping:              1
      CPU MHz:               3134.943
      BogoMIPS:              5589.37
      Virtualization:        AMD-V
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              512K
      L3 cache:              32768K
      NUMA node0 CPU(s):     0-3
      NUMA node1 CPU(s):     4-7
      NUMA node2 CPU(s):     8-11
      NUMA node3 CPU(s):     12-15
      NUMA node4 CPU(s):     16-19
      NUMA node5 CPU(s):     20-23
      NUMA node6 CPU(s):     24-27
      NUMA node7 CPU(s):     28-31
      NUMA node8 CPU(s):     32-35
      NUMA node9 CPU(s):     36-39
      NUMA node10 CPU(s):    40-43
      NUMA node11 CPU(s):    44-47
      NUMA node12 CPU(s):    48-51
      NUMA node13 CPU(s):    52-55
      NUMA node14 CPU(s):    56-59
      NUMA node15 CPU(s):    60-63
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
     pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
     constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
     monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c
     rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
     osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
     cat_l3 cdp_l3 invpcid_single hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall
     fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap clflushopt clwb
     sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
```

(Continued on next page)

Platform Notes (Continued)

```
      cqm_mbm_local clzero irperf xsaveerptr wbnoinvd amd_ppin arat npt lbrv svm_lock
      nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
      v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

 /proc/cpuinfo cache data
    cache size : 512 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 16 nodes (0-15)
   node 0 cpus: 0 1 2 3
   node 0 size: 64074 MB
   node 0 free: 63996 MB
   node 1 cpus: 4 5 6 7
   node 1 size: 64510 MB
   node 1 free: 64370 MB
   node 2 cpus: 8 9 10 11
   node 2 size: 64508 MB
   node 2 free: 64415 MB
   node 3 cpus: 12 13 14 15
   node 3 size: 64510 MB
   node 3 free: 64343 MB
   node 4 cpus: 16 17 18 19
   node 4 size: 64508 MB
   node 4 free: 64454 MB
   node 5 cpus: 20 21 22 23
   node 5 size: 64508 MB
   node 5 free: 64468 MB
   node 6 cpus: 24 25 26 27
   node 6 size: 64506 MB
   node 6 free: 64436 MB
   node 7 cpus: 28 29 30 31
   node 7 size: 64492 MB
   node 7 free: 64417 MB
   node 8 cpus: 32 33 34 35
   node 8 size: 64508 MB
   node 8 free: 64432 MB
   node 9 cpus: 36 37 38 39
   node 9 size: 64508 MB
   node 9 free: 64427 MB
   node 10 cpus: 40 41 42 43
   node 10 size: 64508 MB
   node 10 free: 64423 MB
   node 11 cpus: 44 45 46 47
   node 11 size: 64508 MB
   node 11 free: 64460 MB
   node 12 cpus: 48 49 50 51
```

(Continued on next page)

Platform Notes (Continued)

```
   node 12 size: 64510 MB
   node 12 free: 64454 MB
   node 13 cpus: 52 53 54 55
   node 13 size: 64469 MB
   node 13 free: 59447 MB
   node 14 cpus: 56 57 58 59
   node 14 size: 64500 MB
   node 14 free: 64470 MB
   node 15 cpus: 60 61 62 63
   node 15 size: 64504 MB
   node 15 free: 64467 MB
   node distances:
   node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
     0:  10  11  11  11  11  11  11  11  32  32  32  32  32  32  32  32
     1:  11  10  11  11  11  11  11  11  32  32  32  32  32  32  32  32
     2:  11  11  10  11  11  11  11  11  32  32  32  32  32  32  32  32
     3:  11  11  11  10  11  11  11  11  32  32  32  32  32  32  32  32
     4:  11  11  11  11  10  11  11  11  32  32  32  32  32  32  32  32
     5:  11  11  11  11  11  10  11  11  32  32  32  32  32  32  32  32
     6:  11  11  11  11  11  11  10  11  32  32  32  32  32  32  32  32
     7:  11  11  11  11  11  11  11  10  32  32  32  32  32  32  32  32
     8:  32  32  32  32  32  32  32  32  10  11  11  11  11  11  11  11
     9:  32  32  32  32  32  32  32  32  11  10  11  11  11  11  11  11
    10:  32  32  32  32  32  32  32  32  11  11  10  11  11  11  11  11
    11:  32  32  32  32  32  32  32  32  11  11  11  10  11  11  11  11
    12:  32  32  32  32  32  32  32  32  11  11  11  11  10  11  11  11
    13:  32  32  32  32  32  32  32  32  11  11  11  11  11  10  11  11
    14:  32  32  32  32  32  32  32  32  11  11  11  11  11  11  10  11
    15:  32  32  32  32  32  32  32  32  11  11  11  11  11  11  11  10

  From /proc/meminfo
     MemTotal:       1056436356 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /sbin/tuned-adm active
      Current active profile: throughput-performance

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux"
        VERSION="8.3 (Ootpa)"
        ID="rhel"
        ID_LIKE="fedora"
        VERSION_ID="8.3"
        PLATFORM_ID="platform:el8"
        PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
```


(Continued on next page)

Platform Notes (Continued)

```
      ANSI_COLOR="0;31"
   redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
   system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

uname -a:
   Linux localhost.localdomain 4.18.0-240.10.1.el8_3.x86_64 #1 SMP Wed Dec 16 03:30:52
   EST 2020 x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                          Not affected
CVE-2018-3620 (L1 Terminal Fault):                       Not affected
Microarchitectural Data Sampling:                        Not affected
CVE-2017-5754 (Meltdown):                                Not affected
CVE-2018-3639 (Speculative Store Bypass):                Mitigation: Speculative Store
                                                         Bypass disabled via prctl and
                                                         seccomp
CVE-2017-5753 (Spectre variant 1):                       Mitigation: usercopy/swapgs
                                                         barriers and __user pointer
                                                         sanitization
CVE-2017-5715 (Spectre variant 2):                       Mitigation: Full AMD retpoline,
                                                       IBPB: conditional, IBRS_FW, STIBP:
                                                         disabled, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort):                 Not affected

run-level 3 Nov 25 12:10 last=5

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.5
   Filesystem     Type   Size  Used Avail Use% Mounted on
   tmpfs          tmpfs  225G  4.8G  221G   3% /mnt/ramdisk

From /sys/devices/virtual/dmi/id
    Vendor:         Dell Inc.
    Product:        PowerEdge R7525
    Product Family: PowerEdge
    Serial:         48LN333

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    16x 80AD869D80AD HMAA8GR7AJR4N-XN 64 GB 2 rank 3200
    16x Not Specified Not Specified
```

(Continued on next page)

Platform Notes (Continued)

```
 BIOS:
    BIOS Vendor:       Dell Inc.
    BIOS Version:      2.0.3
    BIOS Date:         01/15/2021
    BIOS Revision:     2.0

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
        | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)
        | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 648.exchange2_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -mno-adx -mno-sse4a -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti

C++ benchmarks:
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks (continued):
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
-lflangrti

Fortran benchmarks:
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -z muldefs
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
-lflangrti

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument -Wno-return-type

C++ benchmarks:
-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:
-Wno-return-type

Peak Compiler Invocation

C benchmarks:
clang

(Continued on next page)

Peak Compiler Invocation (Continued)

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: basepeak = yes

602.gcc_s: -m64 -mno-adx -mno-sse4a -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=5 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

605.mcf_s: Same as 602.gcc_s

625.x264_s: Same as 602.gcc_s

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

(Continued on next page)

Peak Optimization Flags (Continued)

620.omnetpp_s (continued):
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto
-finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: Same as 620.omnetpp_s

641.leela_s: Same as 620.omnetpp_s

Fortran benchmarks:
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -fopenmp=libomp
-lomp -lamdlibm -ljemalloc -lflang

Peak Other Flags

C benchmarks:
-Wno-unused-command-line-argument -Wno-return-type

C++ benchmarks:
-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:
-Wno-return-type

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-Milan-rev1.0.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-Milan-rev1.0.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2021-02-27 12:12:36-0500.
Report generated on 2021-03-16 18:36:07 by CPU2017 PS formatter v6255.
Originally published on 2021-03-16.