# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Fujitsu

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M1, AMD EPYC 7302, 3.00 GHz

SPECrate®2017_int_base = 244

SPECrate®2017_int_peak = Not Run

**CPU2017 License:** 19
**Test Sponsor:** Fujitsu
**Tested by:** Fujitsu

**Test Date:** Mar-2021
**Hardware Availability:** Apr-2021
**Software Availability:** Jul-2020

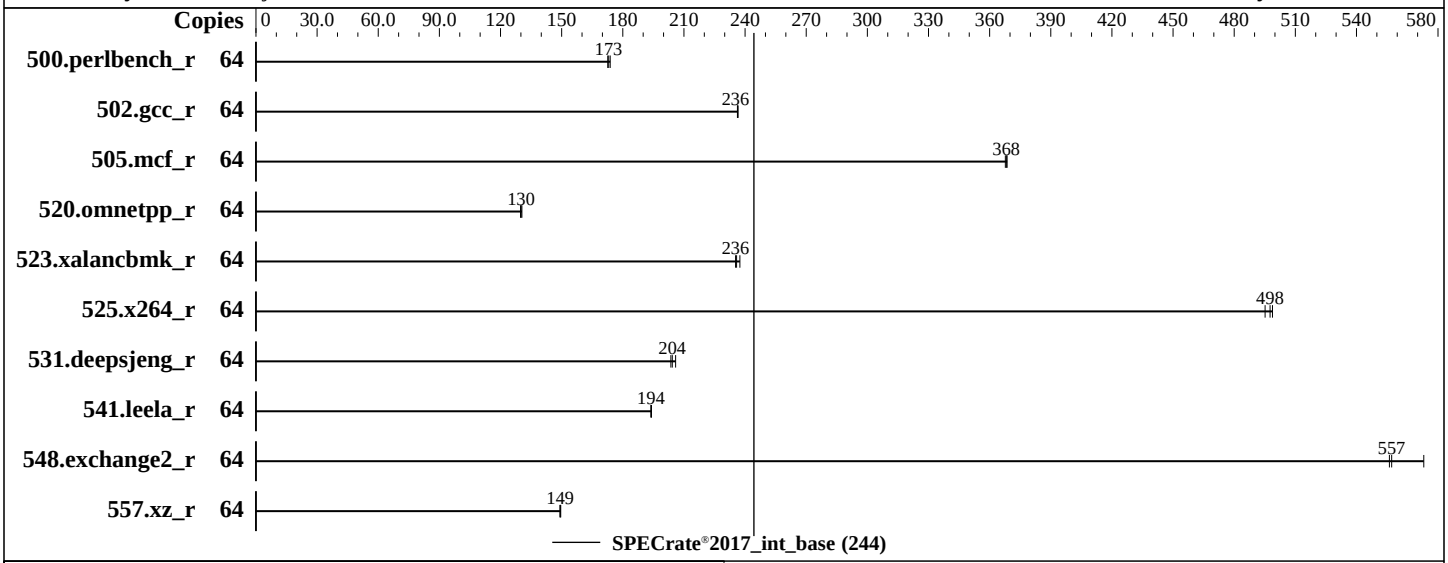


## Hardware

| | |
|---|---|
| CPU Name: | AMD EPYC 7302 |
| Max MHz: | 3300 |
| Nominal: | 3000 |
| Enabled: | 32 cores, 2 chips, 2 threads/core |
| Orderable: | 2 chips |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 512 KB I+D on chip per core |
| L3: | 128 MB I+D on chip per chip, 16 MB shared / 2 cores |
| Other: | None |
| Memory: | 2 TB (32 x 64 GB 4Rx4 PC4-3200V-L) |
| Storage: | 1 x PCIe SSD, 2TB |
| Other: | None |

## Software

| | |
|---|---|
| OS: | SUSE Linux Enterprise Server 15 SP2 (x86_64) kernel version 5.3.18-22-default |
| Compiler: | C/C++/Fortran: Version 2.0.0 of AOCC |
| Parallel: | No |
| Firmware: | Fujitsu BIOS Version 1.2.V1 Released Apr-2021 tested as Dec-2020 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | Not Applicable |
| Other: | jemalloc: jemalloc memory allocator library v5.2.0 |
| Power Management: | BIOS set to prefer performance at the cost of additional power usage |

# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu
(Test Sponsor: Fujitsu)
PRIMERGY RX2450 M1, AMD EPYC 7302, 3.00 GHz

SPECrate®2017_int_base = 244

SPECrate®2017_int_peak = Not Run

**CPU2017 License:** 19
**Test Sponsor:** Fujitsu
**Tested by:** Fujitsu

**Test Date:** Mar-2021
**Hardware Availability:** Apr-2021
**Software Availability:** Jul-2020

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 500.perlbench_r | 64 | 590 | 173 | 586 | 174 | **589** | **173** | | | | | | | |
| 502.gcc_r | 64 | 384 | 236 | **383** | **236** | 383 | 237 | | | | | | | |
| 505.mcf_r | 64 | 281 | 368 | **281** | **368** | 281 | 369 | | | | | | | |
| 520.omnetpp_r | 64 | 647 | 130 | **645** | **130** | 643 | 130 | | | | | | | |
| 523.xalancbmk_r | 64 | 287 | 235 | 285 | 237 | **287** | **236** | | | | | | | |
| 525.x264_r | 64 | 226 | 495 | 225 | 499 | **225** | **498** | | | | | | | |
| 531.deepsjeng_r | 64 | **359** | **204** | 356 | 206 | 360 | 204 | | | | | | | |
| 541.leela_r | 64 | 547 | 194 | **547** | **194** | 546 | 194 | | | | | | | |
| 548.exchange2_r | 64 | 293 | 573 | 301 | 556 | **301** | **557** | | | | | | | |
| 557.xz_r | 64 | 462 | 150 | **463** | **149** | 463 | 149 | | | | | | | |

**SPECrate®2017_int_base = 244**

**SPECrate®2017_int_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

## Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

## Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).
```

**(Continued on next page)**

## Operating System Notes (Continued)

```
Transparent huge pages set to 'always' for this run (OS default)
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/Benchmark/speccpu/amd_rate_aocc200_rome_C_lib/64;/home/Benchmark/
     speccpu/amd_rate_aocc200_rome_C_lib/32:"
MALLOC_CONF = "retain:true"
```

## General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.2.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2
```

## Platform Notes

```
 BIOS configuration:
 cTDP = 180
 Determinism Slider = Power
 Package Power Limit = 180
 SVM Mode = Disabled
 NUMA Nodes Per Socket = NPS4
 L1 Stream HW Prefetcher = Enabled
 L2 Stream HW Prefetcher = Enabled
 DRAM Scrub Time = Disabled

 Sysinfo program /home/Benchmark/speccpu/bin/sysinfo
 Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
 running on localhost Wed Dec 23 08:45:18 2020

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
```

**(Continued on next page)**

## Platform Notes (Continued)

```
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

  From /proc/cpuinfo
     model name : AMD EPYC 7302 16-Core Processor
        2  "physical id"s (chips)
        64 "processors"
     cores, siblings (Caution: counting these is hw and system dependent. The following
     excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
        cpu cores : 16
        siblings  : 32
        physical 0: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29
        physical 1: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29

  From lscpu:
       Architecture:        x86_64
       CPU op-mode(s):      32-bit, 64-bit
       Byte Order:          Little Endian
       Address sizes:       43 bits physical, 48 bits virtual
       CPU(s):              64
       On-line CPU(s) list: 0-63
       Thread(s) per core:  2
       Core(s) per socket:  16
       Socket(s):           2
       NUMA node(s):        8
       Vendor ID:           AuthenticAMD
       CPU family:          23
       Model:               49
       Model name:          AMD EPYC 7302 16-Core Processor
       Stepping:            0
       CPU MHz:             2413.082
       CPU max MHz:         3000.0000
       CPU min MHz:         1500.0000
       BogoMIPS:            6000.09
       Virtualization:      AMD-V
       L1d cache:           32K
       L1i cache:           32K
       L2 cache:            512K
       L3 cache:            16384K
       NUMA node0 CPU(s):   0-3,32-35
       NUMA node1 CPU(s):   4-7,36-39
       NUMA node2 CPU(s):   8-11,40-43
       NUMA node3 CPU(s):   12-15,44-47
       NUMA node4 CPU(s):   16-19,48-51
       NUMA node5 CPU(s):   20-23,52-55
       NUMA node6 CPU(s):   24-27,56-59
       NUMA node7 CPU(s):   28-31,60-63
       Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
      constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
      monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm
      cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs
      skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
      cdp_l3 hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep
      bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
      cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd
      arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
      pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor
      smca

 /proc/cpuinfo cache data
    cache size : 512 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 8 nodes (0-7)
   node 0 cpus: 0 1 2 3 32 33 34 35
   node 0 size: 257776 MB
   node 0 free: 257366 MB
   node 1 cpus: 4 5 6 7 36 37 38 39
   node 1 size: 258010 MB
   node 1 free: 257773 MB
   node 2 cpus: 8 9 10 11 40 41 42 43
   node 2 size: 258044 MB
   node 2 free: 257809 MB
   node 3 cpus: 12 13 14 15 44 45 46 47
   node 3 size: 258032 MB
   node 3 free: 257806 MB
   node 4 cpus: 16 17 18 19 48 49 50 51
   node 4 size: 258044 MB
   node 4 free: 257819 MB
   node 5 cpus: 20 21 22 23 52 53 54 55
   node 5 size: 258044 MB
   node 5 free: 257816 MB
   node 6 cpus: 24 25 26 27 56 57 58 59
   node 6 size: 258044 MB
   node 6 free: 257776 MB
   node 7 cpus: 28 29 30 31 60 61 62 63
   node 7 size: 257804 MB
   node 7 free: 257587 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  12  12  12  32  32  32  32
     1:  12  10  12  12  32  32  32  32
     2:  12  12  10  12  32  32  32  32
```

**(Continued on next page)**

## Platform Notes (Continued)

```
     3:  12  12  12  10  32  32  32  32
     4:  32  32  32  32  10  12  12  12
     5:  32  32  32  32  12  10  12  12
     6:  32  32  32  32  12  12  10  12
     7:  32  32  32  32  12  12  12  10

  From /proc/meminfo
     MemTotal:       2113334328 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
     performance

  From /etc/*release* /etc/*version*
     os-release:
        NAME="SLES"
        VERSION="15-SP2"
        VERSION_ID="15.2"
        PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
        ID="sles"
        ID_LIKE="suse"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:15:sp2"

  uname -a:
     Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020
     (720aeba/lp-1a956f1) x86_64 x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2018-12207 (iTLB Multihit):                          Not affected
  CVE-2018-3620 (L1 Terminal Fault):                       Not affected
  Microarchitectural Data Sampling:                        Not affected
  CVE-2017-5754 (Meltdown):                                Not affected
  CVE-2018-3639 (Speculative Store Bypass):                Mitigation: Speculative Store
                                                           Bypass disabled via prctl and
                                                           seccomp
  CVE-2017-5753 (Spectre variant 1):                       Mitigation: usercopy/swapgs
                                                           barriers and __user pointer
                                                           sanitization
  CVE-2017-5715 (Spectre variant 2):                       Mitigation: Full AMD retpoline,
                                                          IBPB: conditional, IBRS_FW, STIBP:
                                                           conditional, RSB filling
  CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
  CVE-2019-11135 (TSX Asynchronous Abort):                 Not affected
```

**(Continued on next page)**

## Platform Notes (Continued)

```
 run-level 3 Dec 23 02:52

 SPEC is set to: /home/Benchmark/speccpu
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/nvme1n1p3 xfs   1.3T   16G  1.3T   2% /home

 From /sys/devices/virtual/dmi/id
     Vendor:         FUJITSU
     Product:        PRIMERGY RX2450 M1
     Serial:         MACUxxxxxx

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     32x Samsung M386A8K40DM2-CWE 64 GB 4 rank 3200

 BIOS:
    BIOS Vendor:       American Megatrends Inc.
    BIOS Version:      1.2.V1
    BIOS Date:         12/22/2020
    BIOS Revision:     5.14

 (End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
        | 525.x264_r(base) 557.xz_r(base)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
        | 541.leela_r(base)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

## Base Portability Flags

500.perlbench_r: `-DSPEC_LINUX_X64 -DSPEC_LP64`
502.gcc_r: `-DSPEC_LP64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LINUX -DSPEC_LP64`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

## Base Optimization Flags

C benchmarks:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang

C++ benchmarks:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang

Fortran benchmarks:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -lmvec -lamdlibm -ljemalloc -lflang

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc200-flags-C4.html
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-ROME-RevE.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc200-flags-C4.xml
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-ROME-RevE.xml


SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2020-12-22 18:45:17-0500.
Report generated on 2021-04-27 16:20:20 by CPU2017 PS formatter v6442.
Originally published on 2021-04-27.