



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
2.80 GHz, AMD EPYC 7543

**SPECSpeed®2017\_int\_base = 12.7**

**SPECSpeed®2017\_int\_peak = 12.7**

CPU2017 License: 9017


**Test Date:** Apr-2021

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Mar-2021

**Tested by:** Lenovo Global Technology

**Software Availability:** Mar-2021

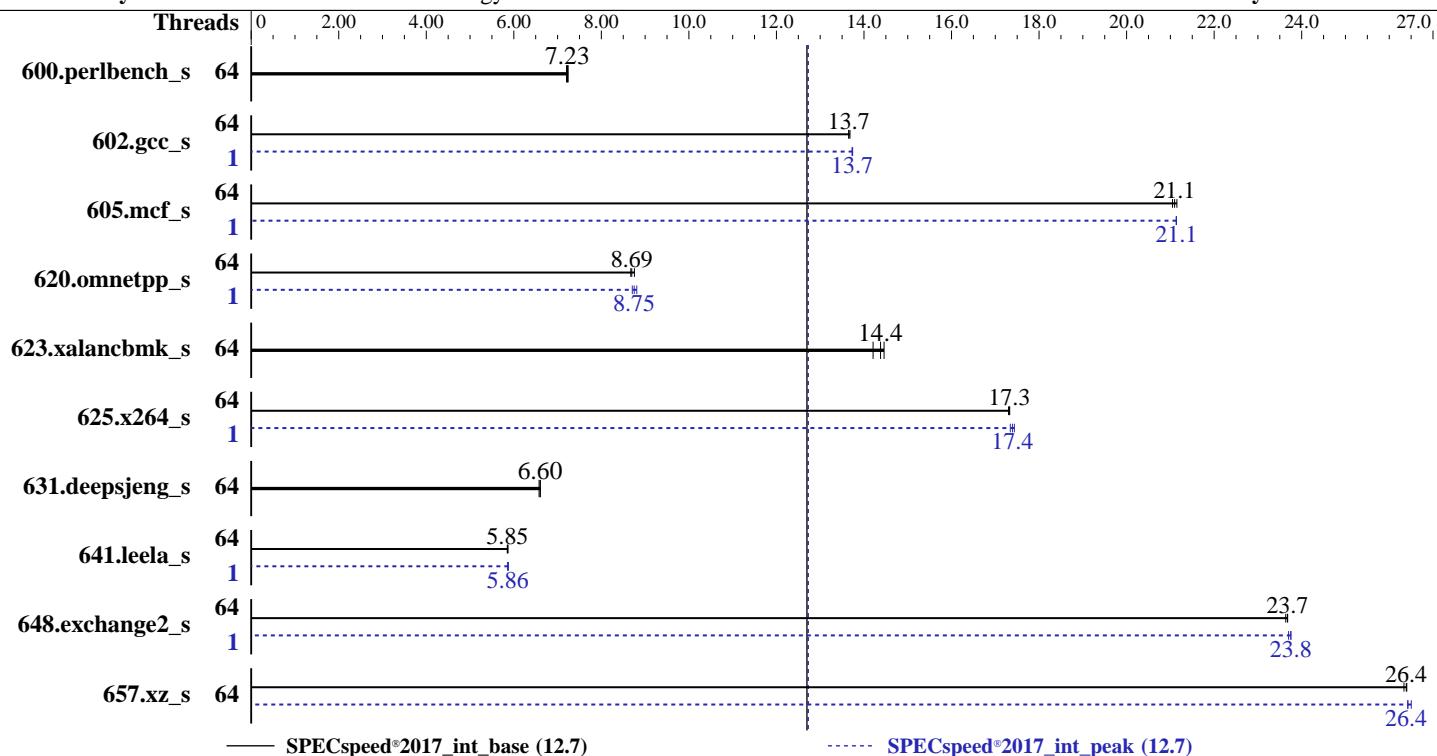

### Hardware

CPU Name: AMD EPYC 7543  
Max MHz: 3700  
Nominal: 2800  
Enabled: 64 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 512 KB I+D on chip per core  
L3: 256 MB I+D on chip per chip,  
32 MB shared / 4 cores  
Other: None  
Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)  
Storage: 1 x 960 GB SATA SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP2 (x86\_64)  
Kernel 5.3.18-22-default  
Compiler: C/C++/Fortran: Version 3.0.0 of AOCC  
Parallel: Yes  
Firmware: Lenovo BIOS Version D8E115G 2.02 released Mar-2021  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: jemalloc: jemalloc memory allocator library v5.1.0  
Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
2.80 GHz, AMD EPYC 7543

SPECspeed®2017\_int\_base = 12.7

SPECspeed®2017\_int\_peak = 12.7

CPU2017 License: 9017

Test Date: Apr-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	64	245	7.24	246	7.20	<b>246</b>	<b>7.23</b>	64	245	7.24	246	7.20	<b>246</b>	<b>7.23</b>
602.gcc_s	64	<b>292</b>	<b>13.7</b>	291	13.7	292	13.7	1	290	13.7	290	13.7	<b>290</b>	<b>13.7</b>
605.mcf_s	64	223	21.1	<b>224</b>	<b>21.1</b>	224	21.0	1	<b>223</b>	<b>21.1</b>	223	21.1	223	21.1
620.omnetpp_s	64	<b>188</b>	<b>8.69</b>	186	8.76	188	8.67	1	<b>186</b>	<b>8.75</b>	185	8.81	187	8.71
623.xalancbmk_s	64	98.0	14.5	<b>98.5</b>	<b>14.4</b>	99.7	14.2	64	98.0	14.5	<b>98.5</b>	<b>14.4</b>	99.7	14.2
625.x264_s	64	102	17.3	<b>102</b>	<b>17.3</b>	102	17.3	1	102	17.3	101	17.4	<b>101</b>	<b>17.4</b>
631.deepsjeng_s	64	<b>217</b>	<b>6.60</b>	217	6.61	218	6.58	64	<b>217</b>	<b>6.60</b>	217	6.61	218	6.58
641.leela_s	64	292	5.85	<b>291</b>	<b>5.85</b>	291	5.87	1	<b>291</b>	<b>5.86</b>	290	5.88	291	5.86
648.exchange2_s	64	124	23.6	124	23.7	<b>124</b>	<b>23.7</b>	1	124	23.8	124	23.7	<b>124</b>	<b>23.8</b>
657.xz_s	64	235	26.3	234	26.4	<b>234</b>	<b>26.4</b>	64	233	26.5	<b>234</b>	<b>26.4</b>	234	26.4
SPECspeed®2017_int_base = 12.7														
SPECspeed®2017_int_peak = 12.7														

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'unlimit -l 2097152' was used to set environment locked pages in memory limit
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of
memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum
necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory
and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout
randomization (ASLR) to reduce run-to-run variability.
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
2.80 GHz, AMD EPYC 7543

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

SPECspeed®2017\_int\_base = 12.7

SPECspeed®2017\_int\_peak = 12.7

Test Date: Apr-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

## Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-127"  
LD_LIBRARY_PATH =  
    "/home/cpu2017-1.1.5-amd-aocc300-milan-B1/amd_speed_aocc300_milan_B_lib/  
    64;/home/cpu2017-1.1.5-amd-aocc300-milan-B1/amd_speed_aocc300_milan_B_li  
    b/32:  
MALLOC_CONF = "retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "128M"  
OMP_THREAD_LIMIT = "128"
```

Environment variables set by runcpu during the 602.gcc\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 605.mcf\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 620.omnetpp\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 625.x264\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 641.leela\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 648.exchange2\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 657.xz\_s peak run:

```
GOMP_CPU_AFFINITY = "0-63"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
2.80 GHz, AMD EPYC 7543

SPECspeed®2017\_int\_base = 12.7

SPECspeed®2017\_int\_peak = 12.7

CPU2017 License: 9017

Test Date: Apr-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

### General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)

jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

### Platform Notes

BIOS configuration:

Operating Mode set to Maximum Performance and then set it to Custom Mode

4-Link xGMI Max Speed set to 16Gbps

SOC P-States set to P0

NUMA nodes per socket set to NPS2

Sysinfo program /home/cpu2017-1.1.5-amd-aocc300-milan-B1/bin/sysinfo

Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c

running on localhost Tue Apr 27 11:21:04 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7543 32-Core Processor
  2 "physical id"s (chips)
  128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 32
  siblings : 64
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         48 bits physical, 48 bits virtual
CPU(s):                128
On-line CPU(s) list:  0-127
Thread(s) per core:   2
Core(s) per socket:   32
Socket(s):             2
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
2.80 GHz, AMD EPYC 7543

SPECspeed®2017\_int\_base = 12.7

SPECspeed®2017\_int\_peak = 12.7

CPU2017 License: 9017

Test Date: Apr-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

## Platform Notes (Continued)

NUMA node(s): 4  
Vendor ID: AuthenticAMD  
CPU family: 25  
Model: 1  
Model name: AMD EPYC 7543 32-Core Processor  
Stepping: 1  
CPU MHz: 1789.978  
CPU max MHz: 2800.0000  
CPU min MHz: 1500.0000  
BogoMIPS: 5589.78  
Virtualization: AMD-V  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 512K  
L3 cache: 32768K  
NUMA node0 CPU(s): 0-15,64-79  
NUMA node1 CPU(s): 16-31,80-95  
NUMA node2 CPU(s): 32-47,96-111  
NUMA node3 CPU(s): 48-63,112-127  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mttr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr\_opt pdpe1gb rdtscp lm constant\_tsc rep\_good nopl nonstop\_tsc cpuid extd\_apicid aperfmpf perf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4\_1 sse4\_2 movbe popcnt aes xsave avx f16c rdrand lahf\_lm cmp\_legacy svm extapic cr8\_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr\_core perfctr\_nb bpext perfctr\_llc mwaitx cpb cat\_l3 cdp\_l3 invpcid\_single hw\_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqmq rdt\_a rdseed adx smap clflushopt clwb sha\_ni xsaveopt xsavec xgetbv1 xsaves cqmq\_l1c cqmq\_occup\_l1c cqmq\_mbm\_total cqmq\_mbm\_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm\_lock nrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists pausefilter pfthreshold v\_vmsave\_vmlload vgif umip pku ospke vaes vpclmulqdq rdpid overflow\_recov succor smca

/proc/cpuinfo cache data  
cache size : 512 KB

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)  
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79  
node 0 size: 128827 MB  
node 0 free: 128211 MB  
node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95  
node 1 size: 128968 MB  
node 1 free: 128446 MB  
node 2 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 96 97 98 99 100 101 102

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
2.80 GHz, AMD EPYC 7543

SPECspeed®2017\_int\_base = 12.7

SPECspeed®2017\_int\_peak = 12.7

CPU2017 License: 9017

Test Date: Apr-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

## Platform Notes (Continued)

```
103 104 105 106 107 108 109 110 111
node 2 size: 129014 MB
node 2 free: 128730 MB
node 3 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 112 113 114 115 116 117
118 119 120 121 122 123 124 125 126 127
node 3 size: 129012 MB
node 3 free: 128737 MB
node distances:
node   0   1   2   3
  0: 10  12  32  32
  1: 12  10  32  32
  2: 32  32  10  12
  3: 32  32  12  10

From /proc/meminfo
MemTotal:      528204108 kB
HugePages_Total:      0
Hugepagesize:     2048 kB

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

From /etc/*release* /etc/*version*
os-release:
  NAME="SLES"
  VERSION="15-SP2"
  VERSION_ID="15.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15:sp2"

uname -a:
Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aebe) x86_64
x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):          Not affected
CVE-2018-3620 (L1 Terminal Fault):        Not affected
Microarchitectural Data Sampling:          Not affected
CVE-2017-5754 (Meltdown):                 Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
                                              Bypass disabled via prctl and
                                              seccomp
CVE-2017-5753 (Spectre variant 1):        Mitigation: usercopy/swaps
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
2.80 GHz, AMD EPYC 7543

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

SPECspeed®2017\_int\_base = 12.7

SPECspeed®2017\_int\_peak = 12.7

Test Date: Apr-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

## Platform Notes (Continued)

CVE-2017-5715 (Spectre variant 2):

barriers and \_\_user pointer  
sanitization

Mitigation: Full AMD retrpoline,  
IBPB: conditional, IBRS\_FW, STIBP:  
always-on, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Apr 27 11:19

SPEC is set to: /home/cpu2017-1.1.5-amd-aocc300-milan-B1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb3	xfs	889G	92G	797G	11%	/

From /sys/devices/virtual/dmi/id

Vendor:	Lenovo
Product:	ThinkSystem SR645 MB
Product Family:	ThinkSystem
Serial:	1234567890

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M393A4K40DB3-CWE	32 GB	2 rank	3200
16x Unknown	Unknown		

BIOS:

BIOS Vendor:	Lenovo
BIOS Version:	D8E115G-2.02
BIOS Date:	03/25/2021
BIOS Revision:	2.2
Firmware Revision:	3.1

(End of data from sysinfo program)

## Compiler Version Notes

=====

C	600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
---	---

=====

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
2.80 GHz, AMD EPYC 7543

SPECspeed®2017\_int\_base = 12.7

SPECspeed®2017\_int\_peak = 12.7

CPU2017 License: 9017

Test Date: Apr-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

## Compiler Version Notes (Continued)

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====

C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak)  
| 631.deepsjeng\_s(base, peak) 641.leela\_s(base, peak)

=====

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====

Fortran | 648.exchange2\_s(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

602.gcc\_S: -DSPEC\_LP64

605.mcf\_S: -DSPEC\_LP64

620.omnetpp\_S: -DSPEC\_LP64

623.xalancbmk\_S: -DSPEC\_LINUX -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
2.80 GHz, AMD EPYC 7543

SPECspeed®2017\_int\_base = 12.7

SPECspeed®2017\_int\_peak = 12.7

CPU2017 License: 9017

Test Date: Apr-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

## Base Portability Flags (Continued)

625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fsto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti
```

C++ benchmarks:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fsto -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
-lflangrti
```

Fortran benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
2.80 GHz, AMD EPYC 7543

SPECspeed®2017\_int\_base = 12.7

SPECspeed®2017\_int\_peak = 12.7

CPU2017 License: 9017

Test Date: Apr-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -z muldefs
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc -flang
-lflangrti
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

C++ benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
2.80 GHz, AMD EPYC 7543

SPECspeed®2017\_int\_base = 12.7

SPECspeed®2017\_int\_peak = 12.7

CPU2017 License: 9017

Test Date: Apr-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

## Peak Optimization Flags (Continued)

600.perlbench\_s: basepeak = yes

```
602.gcc_s: -m64 -mno-adx -mno-sse4a -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fsto
-fstruct-layout=5 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

605.mcf\_s: Same as 602.gcc\_s

625.x264\_s: Same as 602.gcc\_s

657.xz\_s: Same as 602.gcc\_s

C++ benchmarks:

```
620.omnetpp_s: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fsto
-finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang
```

623.xalancbmk\_s: basepeak = yes

631.deepsjeng\_s: basepeak = yes

641.leela\_s: Same as 620.omnetpp\_s

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
2.80 GHz, AMD EPYC 7543

SPECspeed®2017\_int\_base = 12.7

SPECspeed®2017\_int\_peak = 12.7

CPU2017 License: 9017

Test Date: Apr-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

## Peak Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lso-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIB -ffast-math -flto -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -fopenmp=libomp
-lomp -lamdlibm -ljemalloc -lflang
```

## Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

C++ benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Milan-E.html>  
<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Milan-E.xml>  
<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.5 on 2021-04-26 23:21:03-0400.

Report generated on 2021-05-26 16:51:56 by CPU2017 PDF formatter v6442.

Originally published on 2021-05-26.