SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
2.00 GHz, AMD EPYC 7663

SPECrate®2017_int_base = 729

SPECrate®2017_int_peak = 766

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: May-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

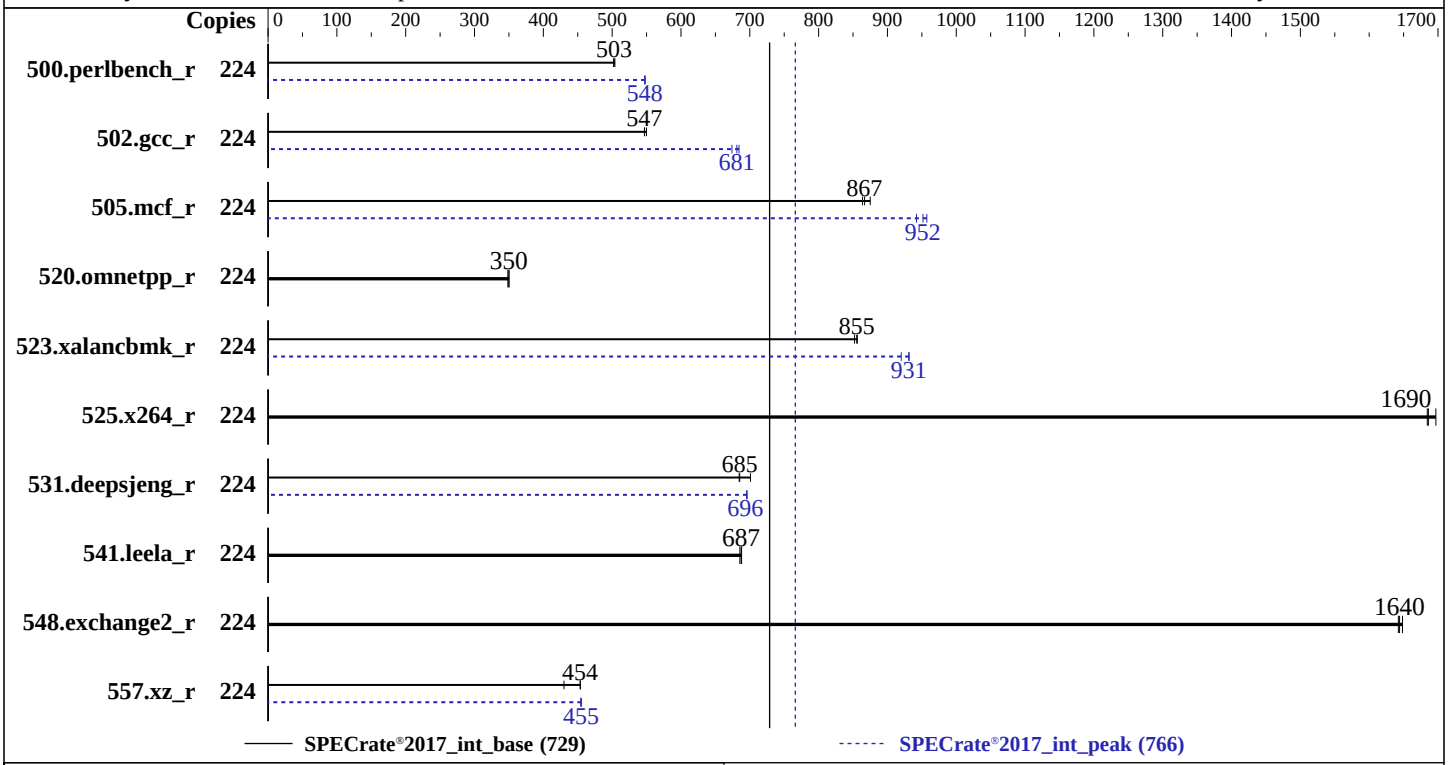

Hardware

CPU Name:	AMD EPYC 7663
Max MHz:	3500
Nominal:	2000
Enabled:	112 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	256 MB I+D on chip per chip, 32 MB shared / 7 cores
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)
Storage:	1 x 240 GB SATA SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP2 (x86_64) Kernel 5.3.18-22-default
Compiler:	C/C++/Fortran: Version 3.0.0 of AOCC
Parallel:	No
Firmware:	Version 0404 released Feb-2021
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc: jemalloc memory allocator library v5.1.0
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	224	710	502	708	504	**709**	**503**	224	**651**	**548**	651	548	651	548
502.gcc_r	224	577	550	**580**	**547**	580	547	224	471	674	463	684	**466**	**681**
505.mcf_r	224	**418**	**867**	414	875	419	864	224	**380**	**952**	378	957	384	942
520.omnetpp_r	224	839	350	843	348	**840**	**350**	224	839	350	843	348	**840**	**350**
523.xalancbmk_r	224	**277**	**855**	276	856	278	852	224	**254**	**931**	257	920	254	932
525.x264_r	224	233	1680	231	1700	**233**	**1690**	224	233	1680	231	1700	**233**	**1690**
531.deepsjeng_r	224	366	701	**375**	**685**	375	685	224	369	696	369	696	**369**	**696**
541.leela_r	224	541	686	539	688	**540**	**687**	224	541	686	539	688	**540**	**687**
548.exchange2_r	224	357	1640	**357**	**1640**	356	1650	224	357	1640	**357**	**1640**	356	1650
557.xz_r	224	**533**	**454**	563	430	533	454	224	**532**	**455**	531	455	532	455

SPECrate®2017_int_base = 729

SPECrate®2017_int_peak = 766

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
 OS set to performance mode via cpupower frequency-set -g performance
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of
memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum
necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory
and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout
randomization (ASLR) to reduce run-to-run variability.
```

(Continued on next page)

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root for peak integer runs and all FP runs to enable Transparent Hugepages (THP).
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root for base integer runs to enable THP only on request.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/cpu118/amd_rate_aocc300_milan_B_lib/lib;/cpu118/amd_rate_aocc300_milan_B_lib/lib32:"
MALLOC_CONF = "retain:true"

Environment variables set by runcpu during the 523.xalancbmk_r peak run:
MALLOC_CONF = "thp:never"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2

Platform Notes

BIOS Configuration:
DLWM Support = Disabled
SVM Mode = Disabled
NUMA nodes per socket = NPS4
APBDIS = 1
Fix SOC P-state = P0
Engine Boost = Enabled
ACPI SRAT L3 Cache as NUMA Domain = Enabled
Memory Interleaving = Disabled

(Continued on next page)

Platform Notes (Continued)

```
Sysinfo program /cpu118/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost Fri May  7 10:52:45 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : AMD EPYC 7663 56-Core Processor
      2  "physical id"s (chips)
      224 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 56
      siblings  : 112
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30 32 33 34 35 36 37 38 40 41 42 43 44 45 46 48 49 50 51 52 53 54 56 57 58 59
      60 61 62
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30 32 33 34 35 36 37 38 40 41 42 43 44 45 46 48 49 50 51 52 53 54 56 57 58 59
      60 61 62

From lscpu from util-linux 2.33.1:
     Architecture:        x86_64
     CPU op-mode(s):      32-bit, 64-bit
     Byte Order:          Little Endian
     Address sizes:       48 bits physical, 48 bits virtual
     CPU(s):              224
     On-line CPU(s) list: 0-223
     Thread(s) per core:  2
     Core(s) per socket:  56
     Socket(s):           2
     NUMA node(s):        16
     Vendor ID:           AuthenticAMD
     CPU family:          25
     Model:               1
     Model name:          AMD EPYC 7663 56-Core Processor
     Stepping:            1
     CPU MHz:             1786.212
     CPU max MHz:         2000.0000
     CPU min MHz:         1500.0000
     BogoMIPS:            3992.60
     Virtualization:      AMD-V
     L1d cache:           32K
     L1i cache:           32K
```

(Continued on next page)

Platform Notes (Continued)

```
      L2 cache:              512K
      L3 cache:              32768K
      NUMA node0 CPU(s):     0-6,112-118
      NUMA node1 CPU(s):     7-13,119-125
      NUMA node2 CPU(s):     14-20,126-132
      NUMA node3 CPU(s):     21-27,133-139
      NUMA node4 CPU(s):     28-34,140-146
      NUMA node5 CPU(s):     35-41,147-153
      NUMA node6 CPU(s):     42-48,154-160
      NUMA node7 CPU(s):     49-55,161-167
      NUMA node8 CPU(s):     56-62,168-174
      NUMA node9 CPU(s):     63-69,175-181
      NUMA node10 CPU(s):    70-76,182-188
      NUMA node11 CPU(s):    77-83,189-195
      NUMA node12 CPU(s):    84-90,196-202
      NUMA node13 CPU(s):    91-97,203-209
      NUMA node14 CPU(s):    98-104,210-216
      NUMA node15 CPU(s):    105-111,217-223
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
      constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
      monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand
      lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw
      ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
      cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase
      bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni
      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
      clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale
      vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif
      umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

  /proc/cpuinfo cache data
     cache size : 512 KB

  From numactl --hardware
  WARNING: a numactl 'node' might or might not correspond to a physical chip.
    available: 16 nodes (0-15)
    node 0 cpus: 0 1 2 3 4 5 6 112 113 114 115 116 117 118
    node 0 size: 64305 MB
    node 0 free: 64026 MB
    node 1 cpus: 7 8 9 10 11 12 13 119 120 121 122 123 124 125
    node 1 size: 64506 MB
    node 1 free: 64145 MB
    node 2 cpus: 14 15 16 17 18 19 20 126 127 128 129 130 131 132
    node 2 size: 64508 MB
    node 2 free: 64386 MB
    node 3 cpus: 21 22 23 24 25 26 27 133 134 135 136 137 138 139
```

(Continued on next page)

Platform Notes (Continued)

```
node 3 size: 64506 MB
node 3 free: 64370 MB
node 4 cpus: 28 29 30 31 32 33 34 140 141 142 143 144 145 146
node 4 size: 64508 MB
node 4 free: 64394 MB
node 5 cpus: 35 36 37 38 39 40 41 147 148 149 150 151 152 153
node 5 size: 64506 MB
node 5 free: 64388 MB
node 6 cpus: 42 43 44 45 46 47 48 154 155 156 157 158 159 160
node 6 size: 64508 MB
node 6 free: 64375 MB
node 7 cpus: 49 50 51 52 53 54 55 161 162 163 164 165 166 167
node 7 size: 64460 MB
node 7 free: 64343 MB
node 8 cpus: 56 57 58 59 60 61 62 168 169 170 171 172 173 174
node 8 size: 64508 MB
node 8 free: 64425 MB
node 9 cpus: 63 64 65 66 67 68 69 175 176 177 178 179 180 181
node 9 size: 64506 MB
node 9 free: 64426 MB
node 10 cpus: 70 71 72 73 74 75 76 182 183 184 185 186 187 188
node 10 size: 64508 MB
node 10 free: 64386 MB
node 11 cpus: 77 78 79 80 81 82 83 189 190 191 192 193 194 195
node 11 size: 64506 MB
node 11 free: 64375 MB
node 12 cpus: 84 85 86 87 88 89 90 196 197 198 199 200 201 202
node 12 size: 64508 MB
node 12 free: 64401 MB
node 13 cpus: 91 92 93 94 95 96 97 203 204 205 206 207 208 209
node 13 size: 64506 MB
node 13 free: 64420 MB
node 14 cpus: 98 99 100 101 102 103 104 210 211 212 213 214 215 216
node 14 size: 64508 MB
node 14 free: 64432 MB
node 15 cpus: 105 106 107 108 109 110 111 217 218 219 220 221 222 223
node 15 size: 64505 MB
node 15 free: 64421 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
  0:  10  11  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  1:  11  10  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  2:  12  12  10  11  12  12  12  12  32  32  32  32  32  32  32  32
  3:  12  12  11  10  12  12  12  12  32  32  32  32  32  32  32  32
  4:  12  12  12  12  10  11  12  12  32  32  32  32  32  32  32  32
  5:  12  12  12  12  11  10  12  12  32  32  32  32  32  32  32  32
  6:  12  12  12  12  12  12  10  11  32  32  32  32  32  32  32  32
```

(Continued on next page)

Platform Notes (Continued)

```
     7:  12  12  12  12  12  12  11  10  32  32  32  32  32  32  32  32
     8:  32  32  32  32  32  32  32  32  10  11  12  12  12  12  12  12
     9:  32  32  32  32  32  32  32  32  11  10  12  12  12  12  12  12
    10:  32  32  32  32  32  32  32  32  12  12  10  11  12  12  12  12
    11:  32  32  32  32  32  32  32  32  12  12  11  10  12  12  12  12
    12:  32  32  32  32  32  32  32  32  12  12  12  12  10  11  12  12
    13:  32  32  32  32  32  32  32  32  12  12  12  12  11  10  12  12
    14:  32  32  32  32  32  32  32  32  12  12  12  12  12  12  10  11
    15:  32  32  32  32  32  32  32  32  12  12  12  12  12  12  11  10

  From /proc/meminfo
     MemTotal:       1056634768 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
     performance

  From /etc/*release* /etc/*version*
     os-release:
        NAME="SLES"
        VERSION="15-SP2"
        VERSION_ID="15.2"
        PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
        ID="sles"
        ID_LIKE="suse"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:15:sp2"

  uname -a:
     Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aeba) x86_64
     x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2018-12207 (iTLB Multihit):                          Not affected
  CVE-2018-3620 (L1 Terminal Fault):                       Not affected
  Microarchitectural Data Sampling:                        Not affected
  CVE-2017-5754 (Meltdown):                                Not affected
  CVE-2018-3639 (Speculative Store Bypass):                Mitigation: Speculative Store
                                                           Bypass disabled via prctl and
                                                           seccomp
  CVE-2017-5753 (Spectre variant 1):                       Mitigation: usercopy/swapgs
                                                           barriers and __user pointer
                                                           sanitization
  CVE-2017-5715 (Spectre variant 2):                       Mitigation: Full AMD retpoline,
                                                          IBPB: conditional, IBRS_FW, STIBP:
```

(Continued on next page)

Platform Notes (Continued)

```
                                                      always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort):               Not affected

run-level 3 May 7 10:51

SPEC is set to: /cpu118
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sdb4      xfs   199G   44G  156G  22% /

From /sys/devices/virtual/dmi/id
    Vendor:         ASUSTeK COMPUTER INC.
    Product:        RS720A-E11-RS12E
    Product Family: Server
    Serial:         123456789012

Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
interpret this section. The 'dmidecode' program reads system data which is "intended to
allow hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    16x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200
    16x Unknown Unknown

BIOS:
   BIOS Vendor:       American Megatrends Inc.
   BIOS Version:      0404
   BIOS Date:         02/02/2021
   BIOS Revision:     4.4

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti

C++ benchmarks:
-m64 -std=c++98 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm
-ljemalloc -lflang -lflangrti

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks (continued):
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -z muldefs -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang -lflangrti

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: `-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -fprofile-instr-generate`(pass 1) `-fprofile-instr-use`(pass 2) `-Ofast -march=znver3 -fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization -mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=false -mllvm -function-specialize -mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc`

502.gcc_r: `-m32 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3 -fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization -mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true -mllvm -function-specialize -mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -fgnu89-inline -ljemalloc`

505.mcf_r: `-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3 -fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization -mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true -mllvm -function-specialize -mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc`

525.x264_r: `basepeak = yes`

557.xz_r: `Same as 505.mcf_r`

C++ benchmarks:

(Continued on next page)

Peak Optimization Flags (Continued)

520.omnetpp_r: `basepeak = yes`

523.xalancbmk_r: `-m32 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto`
`-Wl,-mllvm -Wl,-function-specialize`
`-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6`
`-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast`
`-march=znver3 -fveclib=AMDLIBM -finline-aggressive`
`-mllvm -unroll-threshold=100 -flv-function-specialization`
`-mllvm -enable-licm-vrp -mllvm -reroll-loops`
`-mllvm -aggressive-loop-unswitch`
`-mllvm -reduce-array-computations=3`
`-mllvm -global-vectorize-slp=true`
`-mllvm -do-block-reorder=aggressive`
`-fvirtual-function-elimination -fvisibility=hidden`
`-ljemalloc`

531.deepsjeng_r: `-m64 -std=c++98`
`-Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto`
`-Wl,-mllvm -Wl,-function-specialize`
`-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6`
`-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast`
`-march=znver3 -fveclib=AMDLIBM -finline-aggressive`
`-mllvm -unroll-threshold=100 -flv-function-specialization`
`-mllvm -enable-licm-vrp -mllvm -reroll-loops`
`-mllvm -aggressive-loop-unswitch`
`-mllvm -reduce-array-computations=3`
`-mllvm -global-vectorize-slp=true`
`-mllvm -do-block-reorder=aggressive`
`-fvirtual-function-elimination -fvisibility=hidden`
`-lamdlibm -ljemalloc`

541.leela_r: `basepeak = yes`

Fortran benchmarks:

548.exchange2_r: `basepeak = yes`

Peak Other Flags

C benchmarks (except as noted below):
`-Wno-unused-command-line-argument`

502.gcc_r: `-L/usr/lib -Wno-unused-command-line-argument`
`-L/sppo/bin/cpu2017v115aocc3/amd_rate_aocc300_milan_A_lib/32`

(Continued on next page)

Peak Other Flags (Continued)

C++ benchmarks (except as noted below):
`-Wno-unused-command-line-argument`

523.xalancbmk_r: `-L/usr/lib -Wno-unused-command-line-argument -L/sppo/bin/cpu2017v115aocc3/amd_rate_aocc300_milan_A_lib/32`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-Milan-V1.3.html`
`http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-Milan-V1.3.xml`
`http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-05-06 22:52:45-0400.
Report generated on 2021-06-08 19:50:59 by CPU2017 PS formatter v6442.
Originally published on 2021-06-08.