SPEC CPU®2017 Floating Point Rate Result

ZTE Corporation

ZTE R8500G4X Server System
(2.90 GHz, Intel Xeon Platinum 8380HL)

SPECrate®2017_fp_base = 674

SPECrate®2017_fp_peak = Not Run

CPU2017 License:	9061	**Test Date:**	Jun-2021
Test Sponsor:	ZTE Corporation	**Hardware Availability:**	Oct-2020
Tested by:	ZTE Corporation	**Software Availability:**	Dec-2020

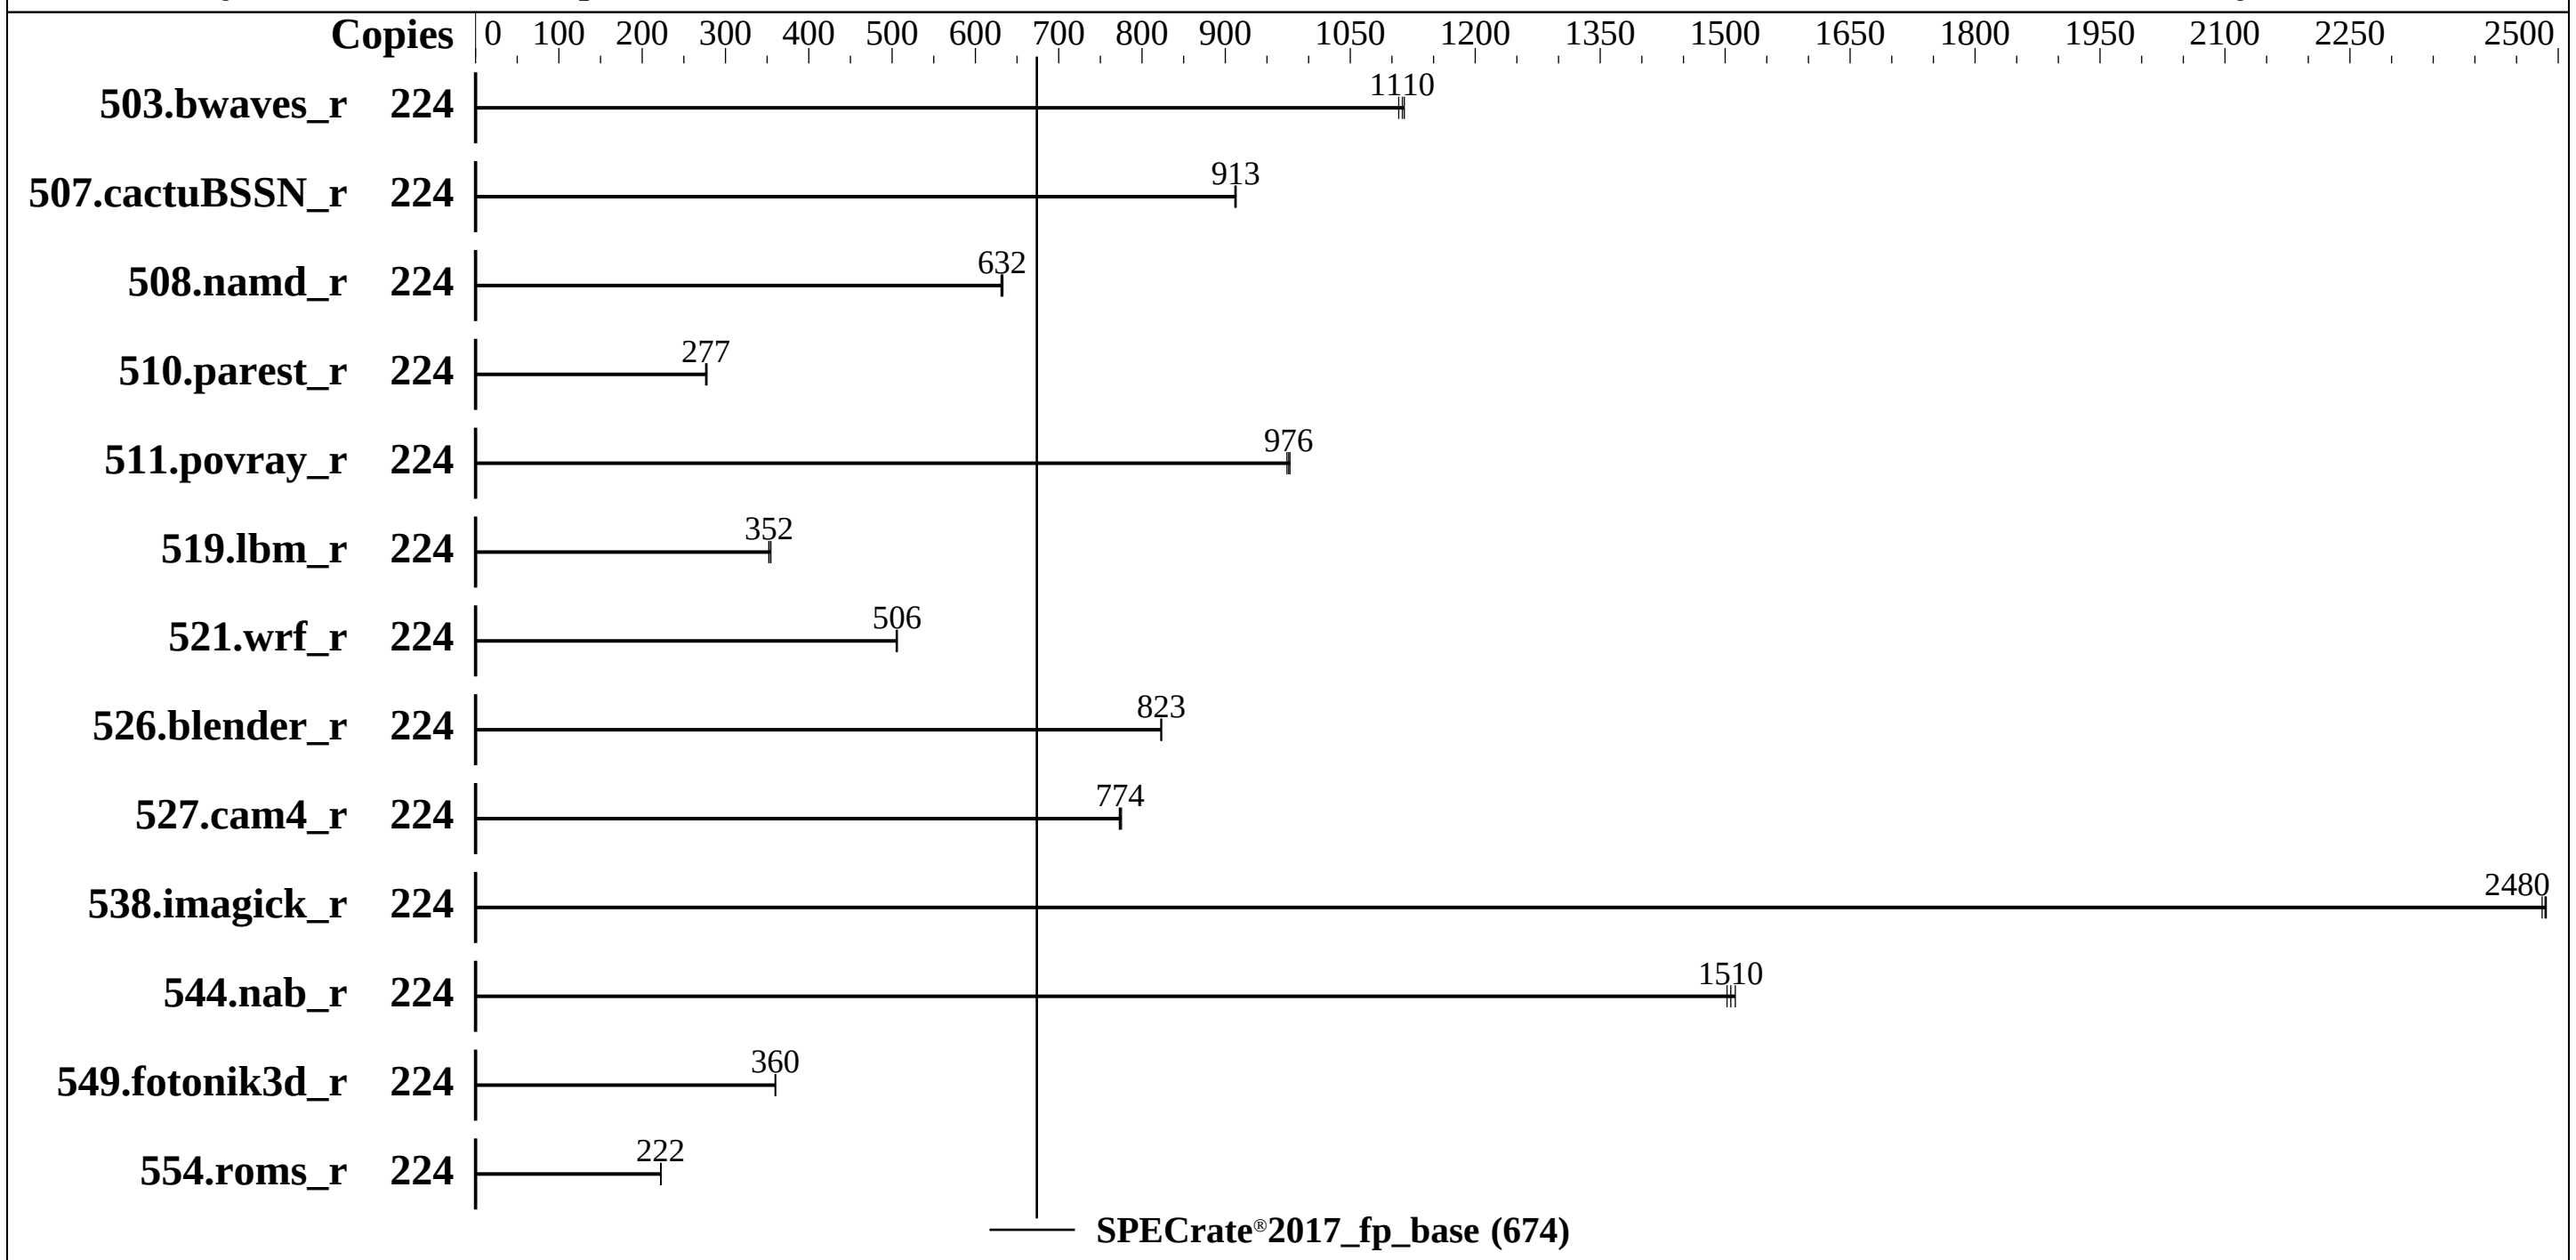

Hardware

CPU Name:	Intel Xeon Platinum 8380HL
Max MHz:	4300
Nominal:	2900
Enabled:	112 cores, 4 chips, 2 threads/core
Orderable:	2,4 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	38.5 MB I+D on chip per chip
Other:	None
Memory:	768 GB (24 x 32 GB 2Rx4 PC4-3200AA-R)
Storage:	1 x 960 GB SATA SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP2 5.3.18-22-default
Compiler:	C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux; Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;
Parallel:	No
Firmware:	Version 00.02.100_0 released Mar-2021
File System:	xfs
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

ZTE Corporation

ZTE R8500G4X Server System
(2.90 GHz, Intel Xeon Platinum 8380HL)

SPECrate®2017_fp_base = 674

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation
Test Date: Jun-2021
Hardware Availability: Oct-2020
Software Availability: Dec-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	224	2015	1110	**2019**	**1110**	2027	1110							
507.cactuBSSN_r	224	311	913	311	911	**311**	**913**							
508.namd_r	224	**337**	**632**	336	633	337	631							
510.parest_r	224	2122	276	**2118**	**277**	2109	278							
511.povray_r	224	537	974	535	978	**536**	**976**							
519.lbm_r	224	671	352	666	354	**670**	**352**							
521.wrf_r	224	991	506	**992**	**506**	994	505							
526.blender_r	224	**414**	**823**	414	823	415	823							
527.cam4_r	224	**506**	**774**	507	773	505	775							
538.imagick_r	224	224	2490	**224**	**2480**	225	2480							
544.nab_r	224	251	1500	**250**	**1510**	249	1510							
549.fotonik3d_r	224	**2425**	**360**	2424	360	2428	360							
554.roms_r	224	**1602**	**222**	1599	223	1602	222							

SPECrate®2017_fp_base = 674

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/opt/spec/lib/intel64:/opt/spec/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Red Hat Enterprise Linux 8.1
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
```

(Continued on next page)

ZTE Corporation

ZTE R8500G4X Server System
(2.90 GHz, Intel Xeon Platinum 8380HL)

SPECrate®2017_fp_base = 674

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Jun-2021
Hardware Availability: Oct-2020
Software Availability: Dec-2020

General Notes (Continued)

```
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Configuration:
Intel VT for Directed I/O (VT-d) = Disabled
Patrol Scrub = Disabled
ENERGY_PERF_BIAS_CFG mode = performance
SNC = Enabled
LLC dead line alloc = Disabled

Sysinfo program /opt/spec/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on localhost.localdomain Mon Jun 28 23:27:05 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8380HL CPU @ 2.90GHz
      4  "physical id"s (chips)
      224 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 28
      siblings  : 56
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
```

(Continued on next page)

Platform Notes (Continued)

```
 From lscpu:
      Architecture:        x86_64
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
      Address sizes:       46 bits physical, 48 bits virtual
      CPU(s):              224
      On-line CPU(s) list: 0-223
      Thread(s) per core:  2
      Core(s) per socket:  28
      Socket(s):           4
      NUMA node(s):        8
      Vendor ID:           GenuineIntel
      CPU family:          6
      Model:               85
      Model name:          Intel(R) Xeon(R) Platinum 8380HL CPU @ 2.90GHz
      Stepping:            11
      CPU MHz:             3799.998
      CPU max MHz:         4300.0000
      CPU min MHz:         1000.0000
      BogoMIPS:            5800.00
      Virtualization:      VT-x
      L1d cache:           32K
      L1i cache:           32K
      L2 cache:            1024K
      L3 cache:            39424K
      NUMA node0 CPU(s):   0-3,7-9,14-17,21-23,112-115,119-121,126-129,133-135
      NUMA node1 CPU(s):   4-6,10-13,18-20,24-27,116-118,122-125,130-132,136-139
      NUMA node2 CPU(s):   28-31,35-37,42-45,49-51,140-143,147-149,154-157,161-163
      NUMA node3 CPU(s):   32-34,38-41,46-48,52-55,144-146,150-153,158-160,164-167
      NUMA node4 CPU(s):   56-59,63-65,70-73,77-79,168-171,175-177,182-185,189-191
      NUMA node5 CPU(s):   60-62,66-69,74-76,80-83,172-174,178-181,186-188,192-195
      NUMA node6 CPU(s):   84-87,91-93,98-101,105-107,196-199,203-205,210-213,217-219
      NUMA node7 CPU(s):   88-90,94-97,102-104,108-111,200-202,206-209,214-216,220-223
      Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
      pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
      rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd
      mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad
      fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f
      avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
      avx512_bf16 dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d
      arch_capabilities
```

(Continued on next page)

Platform Notes (Continued)

```
/proc/cpuinfo cache data
   cache size : 39424 KB

From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 112 113 114 115 119 120 121 126 127 128
  129 133 134 135
  node 0 size: 95077 MB
  node 0 free: 86902 MB
  node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 116 117 118 122 123 124 125 130 131
  132 136 137 138 139
  node 1 size: 96727 MB
  node 1 free: 90825 MB
  node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 140 141 142 143 147 148 149 154
  155 156 157 161 162 163
  node 2 size: 96761 MB
  node 2 free: 91011 MB
  node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 144 145 146 150 151 152 153 158
  159 160 164 165 166 167
  node 3 size: 96761 MB
  node 3 free: 91112 MB
  node 4 cpus: 56 57 58 59 63 64 65 70 71 72 73 77 78 79 168 169 170 171 175 176 177 182
  183 184 185 189 190 191
  node 4 size: 96761 MB
  node 4 free: 91042 MB
  node 5 cpus: 60 61 62 66 67 68 69 74 75 76 80 81 82 83 172 173 174 178 179 180 181 186
  187 188 192 193 194 195
  node 5 size: 96761 MB
  node 5 free: 90414 MB
  node 6 cpus: 84 85 86 87 91 92 93 98 99 100 101 105 106 107 196 197 198 199 203 204 205
  210 211 212 213 217 218 219
  node 6 size: 96761 MB
  node 6 free: 90764 MB
  node 7 cpus: 88 89 90 94 95 96 97 102 103 104 108 109 110 111 200 201 202 206 207 208
  209 214 215 216 220 221 222 223
  node 7 size: 96482 MB
  node 7 free: 89980 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  11  20  20  20  20  20  20
    1:  11  10  20  20  20  20  20  20
    2:  20  20  10  11  20  20  20  20
    3:  20  20  11  10  20  20  20  20
    4:  20  20  20  20  10  11  20  20
    5:  20  20  20  20  11  10  20  20
    6:  20  20  20  20  20  20  10  11
```

(Continued on next page)

Platform Notes (Continued)

```
     7:  20  20  20  20  20  20  11  10

 From /proc/meminfo
    MemTotal:       790624728 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
    performance

 From /etc/*release* /etc/*version*
    os-release:
       NAME="SLES"
       VERSION="15-SP2"
       VERSION_ID="15.2"
       PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
       ID="sles"
       ID_LIKE="suse"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:15:sp2"

 uname -a:
    Linux localhost.localdomain 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020
    (720aeba/lp-1a956f1) x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2018-12207 (iTLB Multihit):                          Not affected
 CVE-2018-3620 (L1 Terminal Fault):                       Not affected
 Microarchitectural Data Sampling:                        Not affected
 CVE-2017-5754 (Meltdown):                                Not affected
 CVE-2018-3639 (Speculative Store Bypass):                Mitigation: Speculative Store
                                                          Bypass disabled via prctl and
                                                          seccomp
 CVE-2017-5753 (Spectre variant 1):                       Mitigation: usercopy/swapgs
                                                          barriers and __user pointer
                                                          sanitization
 CVE-2017-5715 (Spectre variant 2):                      Mitigation: Enhanced IBRS, IBPB:
                                                          conditional, RSB filling
 CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
 CVE-2019-11135 (TSX Asynchronous Abort):                 Not affected

 run-level 5 Oct 20 08:22

 SPEC is set to: /opt/spec
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda6      xfs   714G   66G  649G  10% /opt
```

(Continued on next page)

ZTE Corporation

ZTE R8500G4X Server System
(2.90 GHz, Intel Xeon Platinum 8380HL)

SPECrate®2017_fp_base = 674

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Jun-2021
Hardware Availability: Oct-2020
Software Availability: Dec-2020

Platform Notes (Continued)

```
From /sys/devices/virtual/dmi/id
    Vendor:         ZTE
    Product:        R8500 G4X
    Product Family: Server
    Serial:         734770800016

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    24x Hynix HMA84GR7DJR4N-XN 32 GB 2 rank 3200
    24x NO DIMM NO DIMM

BIOS:
   BIOS Vendor:       ZTE
   BIOS Version:      00.02.100_0
   BIOS Date:         2021/03/25
   BIOS Revision:     0.2

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

(Continued on next page)

Base Compiler Invocation (Continued)

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`ifort icx`

Benchmarks using both C and C++:
`icpx icx`

Benchmarks using Fortran, C, and C++:
`icpx icx ifort`

Base Portability Flags

503.bwaves_r: `-DSPEC_LP64`
507.cactuBSSN_r: `-DSPEC_LP64`
508.namd_r: `-DSPEC_LP64`
510.parest_r: `-DSPEC_LP64`
511.povray_r: `-DSPEC_LP64`
519.lbm_r: `-DSPEC_LP64`
521.wrf_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian`
526.blender_r: `-DSPEC_LP64 -DSPEC_LINUX -funsigned-char`
527.cam4_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG`
538.imagick_r: `-DSPEC_LP64`
544.nab_r: `-DSPEC_LP64`
549.fotonik3d_r: `-DSPEC_LP64`
554.roms_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
`-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

C++ benchmarks:
`-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries -ljemalloc`

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks (continued):
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html
http://www.spec.org/cpu2017/flags/ZTE-Platform-Settings-V1.2.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml
http://www.spec.org/cpu2017/flags/ZTE-Platform-Settings-V1.2.xml

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.7 on 2021-06-28 11:27:05-0400.
Report generated on 2021-07-21 15:36:02 by CPU2017 PS formatter v6442.
Originally published on 2021-07-20.