SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10 Plus
(2.40 GHz, Intel Xeon Platinum 8360Y)

SPECrate®2017_int_base = 518

SPECrate®2017_int_peak = 538

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2021
Hardware Availability: Jun-2021
Software Availability: Dec-2020

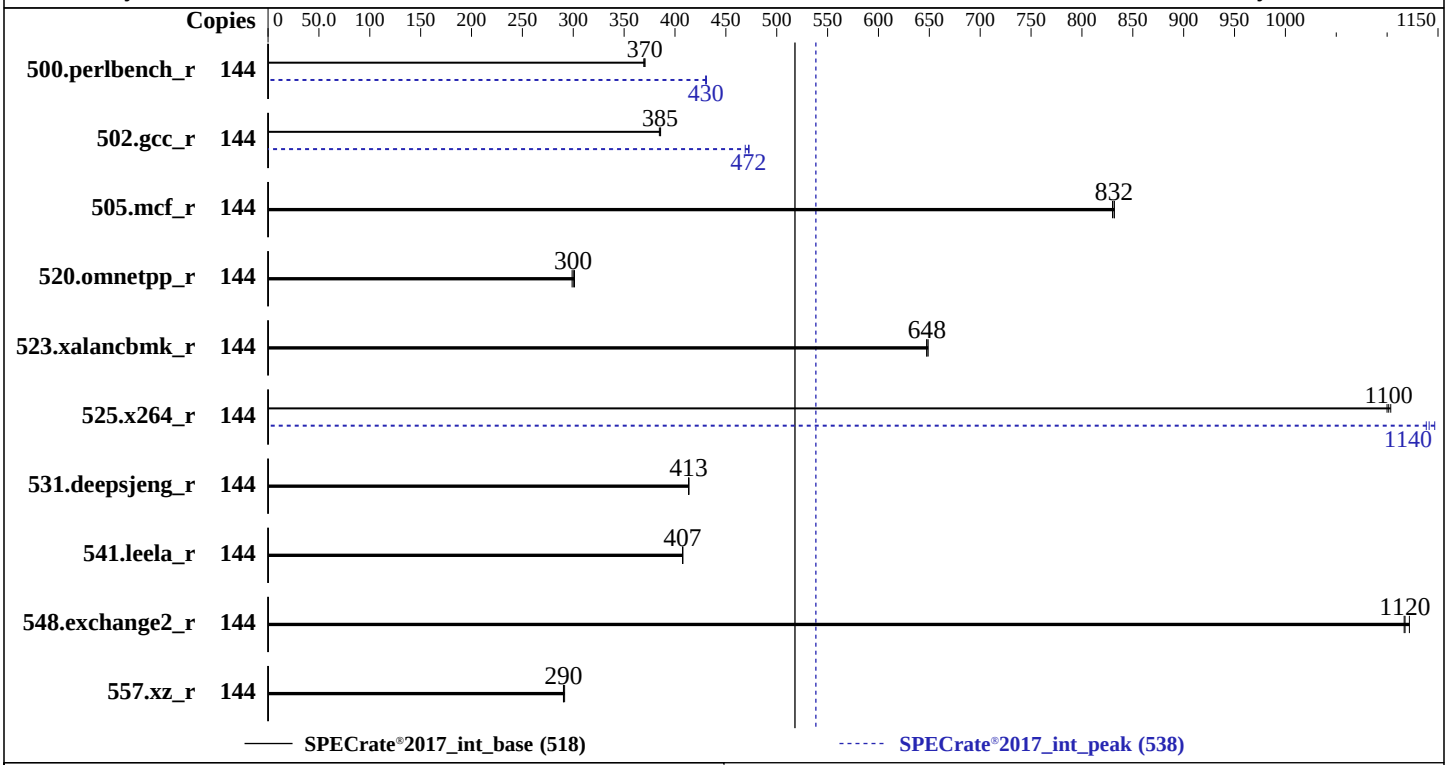

Hardware

CPU Name:	Intel Xeon Platinum 8360Y
Max MHz:	3500
Nominal:	2400
Enabled:	72 cores, 2 chips, 2 threads/core
Orderable:	1, 2 chip(s)
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1.25 MB I+D on chip per core
L3:	54 MB I+D on chip per chip
Other:	None
Memory:	2 TB (32 x 64 GB 2Rx4 PC4-3200AA-R)
Storage:	1 x 400 GB SAS SSD, RAID 0
Other:	None

Software

OS:	Red Hat Enterprise Linux 8.3 (Ootpa) Kernel 4.18.0-240.el8.x86_64
Compiler:	C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux; Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux; C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux
Parallel:	No
Firmware:	HPE BIOS Version U46 v1.42 05/16/2021 released May-2021
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL360 Gen10 Plus
(2.40 GHz, Intel Xeon Platinum 8360Y)

SPECrate®2017_int_base = 518

SPECrate®2017_int_peak = 538

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2021
Hardware Availability: Jun-2021
Software Availability: Dec-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	144	621	369	**619**	**370**	619	371	144	**533**	**430**	532	431	533	430
502.gcc_r	144	528	386	530	385	**529**	**385**	144	431	473	435	469	**432**	**472**
505.mcf_r	144	**280**	**832**	280	830	280	832	144	**280**	**832**	280	830	280	832
520.omnetpp_r	144	632	299	627	301	**630**	**300**	144	632	299	627	301	**630**	**300**
523.xalancbmk_r	144	**235**	**648**	234	649	235	647	144	**235**	**648**	234	649	235	647
525.x264_r	144	228	1100	229	1100	**229**	**1100**	144	220	1150	**221**	**1140**	221	1140
531.deepsjeng_r	144	**399**	**413**	399	413	399	414	144	**399**	**413**	399	413	399	414
541.leela_r	144	585	408	**585**	**407**	585	407	144	585	408	**585**	**407**	585	407
548.exchange2_r	144	336	1120	338	1120	**338**	**1120**	144	336	1120	338	1120	**338**	**1120**
557.xz_r	144	**535**	**290**	536	290	534	292	144	**535**	**290**	536	290	534	292

SPECrate®2017_int_base = 518

SPECrate®2017_int_peak = 538

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3 >       /proc/sys/vm/drop_caches
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2017_1.1.8/lib/intel64:/home/cpu2017_1.1.8/lib/ia32:/home/cpu2
     017_1.1.8/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Red Hat Enterprise Linux 8.1
runcpu command invoked through numactl i.e.:
```

(Continued on next page)

General Notes (Continued)

```
 numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

Submitted_by: "Bhatnagar, Prateek" <prateek.bhatnagar@hpe.com>
Submitted: Mon Jul  5 08:08:56 EDT 2021
Submission: cpu2017-20210705-27769.sub
```

Platform Notes

```
The system ROM used for this result contains Intel microcode version 0xd0002a0 for
the Intel Xeon Platinum 8360Y processor.
  BIOS Configuration:
  Workload Profile set to General Throughput Compute
  Memory Patrol Scrubbing set to Disabled
  Advanced Memory Protection set to Advanced ECC
  XPT Remote Prefetcher set to Enabled
  Last Level Cache (LLC) Dead Line Allocation set to Disabled
  Enhanced Processor Performance set to Enabled
  Enhanced Processor Performance Profile set to Aggressive
  Thermal Configuration set to Maximum Cooling
  Intel UPI Link Frequency set to Minimum
  Intel UPI Link Enablement set to Single Link
  D2K set to Disabled
  Workload Profile set to Custom
    DCU Stream Prefetcher set to Disabled
    Energy Efficient Turbo set to Enabled
    Adjacent Sector Prefetcher set to Disabled
    Intel UPI Link Power Management set to Enabled

 Sysinfo program /home/cpu2017_1.1.8/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on localhost.localdomain Thu Jun 24 16:44:26 2021

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
```

(Continued on next page)

Platform Notes (Continued)

```
    model name : Intel(R) Xeon(R) Platinum 8360Y CPU @ 2.40GHz
       2  "physical id"s (chips)
       144 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 36
       siblings  : 72
       physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31 32 33 34 35
       physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31 32 33 34 35

  From lscpu from util-linux 2.32.1:
       Architecture:        x86_64
       CPU op-mode(s):      32-bit, 64-bit
       Byte Order:          Little Endian
       CPU(s):              144
       On-line CPU(s) list: 0-143
       Thread(s) per core:  2
       Core(s) per socket:  36
       Socket(s):           2
       NUMA node(s):        4
       Vendor ID:           GenuineIntel
       CPU family:          6
       Model:               106
       Model name:          Intel(R) Xeon(R) Platinum 8360Y CPU @ 2.40GHz
       Stepping:            6
       CPU MHz:             1282.401
       BogoMIPS:            4800.00
       Virtualization:      VT-x
       L1d cache:           48K
       L1i cache:           32K
       L2 cache:            1280K
       L3 cache:            55296K
       NUMA node0 CPU(s):   0-17,72-89
       NUMA node1 CPU(s):   18-35,90-107
       NUMA node2 CPU(s):   36-53,108-125
       NUMA node3 CPU(s):   54-71,126-143
       Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
       pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
       lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
       aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
       xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
       avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd
       mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad
       fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
       rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
```

(Continued on next page)

Platform Notes (Continued)

```
      avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
      cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
      ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
      avx512_vpopcntdq la57 rdpid md_clear pconfig flush_l1d arch_capabilities

  /proc/cpuinfo cache data
     cache size : 55296 KB

  From numactl --hardware
  WARNING: a numactl 'node' might or might not correspond to a physical chip.
    available: 4 nodes (0-3)
    node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 72 73 74 75 76 77 78 79 80 81
    82 83 84 85 86 87 88 89
    node 0 size: 502589 MB
    node 0 free: 515340 MB
    node 1 cpus: 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 90 91 92 93 94 95 96
    97 98 99 100 101 102 103 104 105 106 107
    node 1 size: 501375 MB
    node 1 free: 515569 MB
    node 2 cpus: 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 108 109 110 111 112
    113 114 115 116 117 118 119 120 121 122 123 124 125
    node 2 size: 502299 MB
    node 2 free: 515627 MB
    node 3 cpus: 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 126 127 128 129 130
    131 132 133 134 135 136 137 138 139 140 141 142 143
    node 3 size: 501857 MB
    node 3 free: 515712 MB
    node distances:
    node   0   1   2   3
      0:  10  20  30  30
      1:  20  10  30  30
      2:  30  30  10  20
      3:  30  30  20  10

  From /proc/meminfo
     MemTotal:       2113468776 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /sbin/tuned-adm active
      Current active profile: throughput-performance

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux"
        VERSION="8.3 (Ootpa)"
        ID="rhel"
```

(Continued on next page)

Platform Notes (Continued)

```
       ID_LIKE="fedora"
       VERSION_ID="8.3"
       PLATFORM_ID="platform:el8"
       PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
       ANSI_COLOR="0;31"
    redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
    system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

  uname -a:
     Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
     x86_64 x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2018-12207 (iTLB Multihit):                          Not affected
  CVE-2018-3620 (L1 Terminal Fault):                       Not affected
  Microarchitectural Data Sampling:                        Not affected
  CVE-2017-5754 (Meltdown):                                Not affected
  CVE-2018-3639 (Speculative Store Bypass):                Mitigation: Speculative Store
                                                           Bypass disabled via prctl and
                                                           seccomp
  CVE-2017-5753 (Spectre variant 1):                       Mitigation: usercopy/swapgs
                                                           barriers and __user pointer
                                                           sanitization
  CVE-2017-5715 (Spectre variant 2):                      Mitigation: Enhanced IBRS, IBPB:
                                                           conditional, RSB filling
  CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
  CVE-2019-11135 (TSX Asynchronous Abort):                 Not affected

  run-level 3 Jun 24 16:43

  SPEC is set to: /home/cpu2017_1.1.8
     Filesystem              Type  Size  Used Avail Use% Mounted on
     /dev/mapper/rhel00-home xfs   372G  219G  153G  59% /home

  From /sys/devices/virtual/dmi/id
      Vendor:         HPE
      Product:        ProLiant DL360 Gen10 Plus
      Product Family: ProLiant
      Serial:         CN701108CQ

  Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
  interpret this section. The 'dmidecode' program reads system data which is "intended to
  allow hardware to be accurately determined", but the intent may not be met, as there are
  frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
    Memory:
```

(Continued on next page)

Platform Notes (Continued)

```
     32x Micron 36ASF8G72PZ-3G2B2 64 GB 2 rank 3200

 BIOS:
    BIOS Vendor:       HPE
    BIOS Version:      U46
    BIOS Date:         05/16/2021
    BIOS Revision:     1.42
    Firmware Revision: 2.42

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 500.perlbench_r(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version
  2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version
  2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version
  2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
```

(Continued on next page)

Compiler Version Notes (Continued)

```
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

(Continued on next page)

Base Optimization Flags (Continued)

C benchmarks (continued):
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc

Peak Compiler Invocation

C benchmarks (except as noted below):
icx

500.perlbench_r: icc

C++ benchmarks:
icpx

Fortran benchmarks:
ifort

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64

(Continued on next page)

Peak Portability Flags (Continued)

541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Peak Optimization Flags

C benchmarks:

500.perlbench_r: `-Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2)
`-xCORE-AVX512 -ipo -O3 -no-prec-div`
`-qopt-mem-layout-trans=4 -fno-strict-overflow`
`-mbranches-within-32B-boundaries`
`-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin`
`-lqkmalloc`

502.gcc_r: `-m32`
`-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/ia32_lin`
`-std=gnu89 -Wl,-z,muldefs -fprofile-generate`(pass 1)
`-fprofile-use=default.profdata`(pass 2) `-xCORE-AVX512 -flto`
`-Ofast`(pass 1) `-O3 -ffast-math -qopt-mem-layout-trans=4`
`-mbranches-within-32B-boundaries`
`-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc`

505.mcf_r: `basepeak = yes`

525.x264_r: `-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto`
`-O3 -ffast-math -qopt-mem-layout-trans=4 -fno-alias`
`-mbranches-within-32B-boundaries`
`-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin`
`-lqkmalloc`

557.xz_r: `basepeak = yes`

C++ benchmarks:

520.omnetpp_r: `basepeak = yes`

523.xalancbmk_r: `basepeak = yes`

531.deepsjeng_r: `basepeak = yes`

541.leela_r: `basepeak = yes`

(Continued on next page)

Peak Optimization Flags (Continued)

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.0-ICX-revE.html
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.0-ICX-revE.xml
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-06-24 07:14:25-0400.
Report generated on 2021-07-21 15:39:59 by CPU2017 PS formatter v6442.
Originally published on 2021-07-20.