# SPEC CPU®2017 Integer Rate Result



## Lenovo Global Technology

ThinkSystem SR850 V2
(2.50 GHz, Intel Xeon Gold 5318H)

SPECrate®2017_int_base = 504

SPECrate®2017_int_peak = Not Run

| | | | |
|---|---|---|---|
| **CPU2017 License:** | 9017 | **Test Date:** | Jun-2021 |
| **Test Sponsor:** | Lenovo Global Technology | **Hardware Availability:** | Nov-2020 |
| **Tested by:** | Lenovo Global Technology | **Software Availability:** | Dec-2020 |

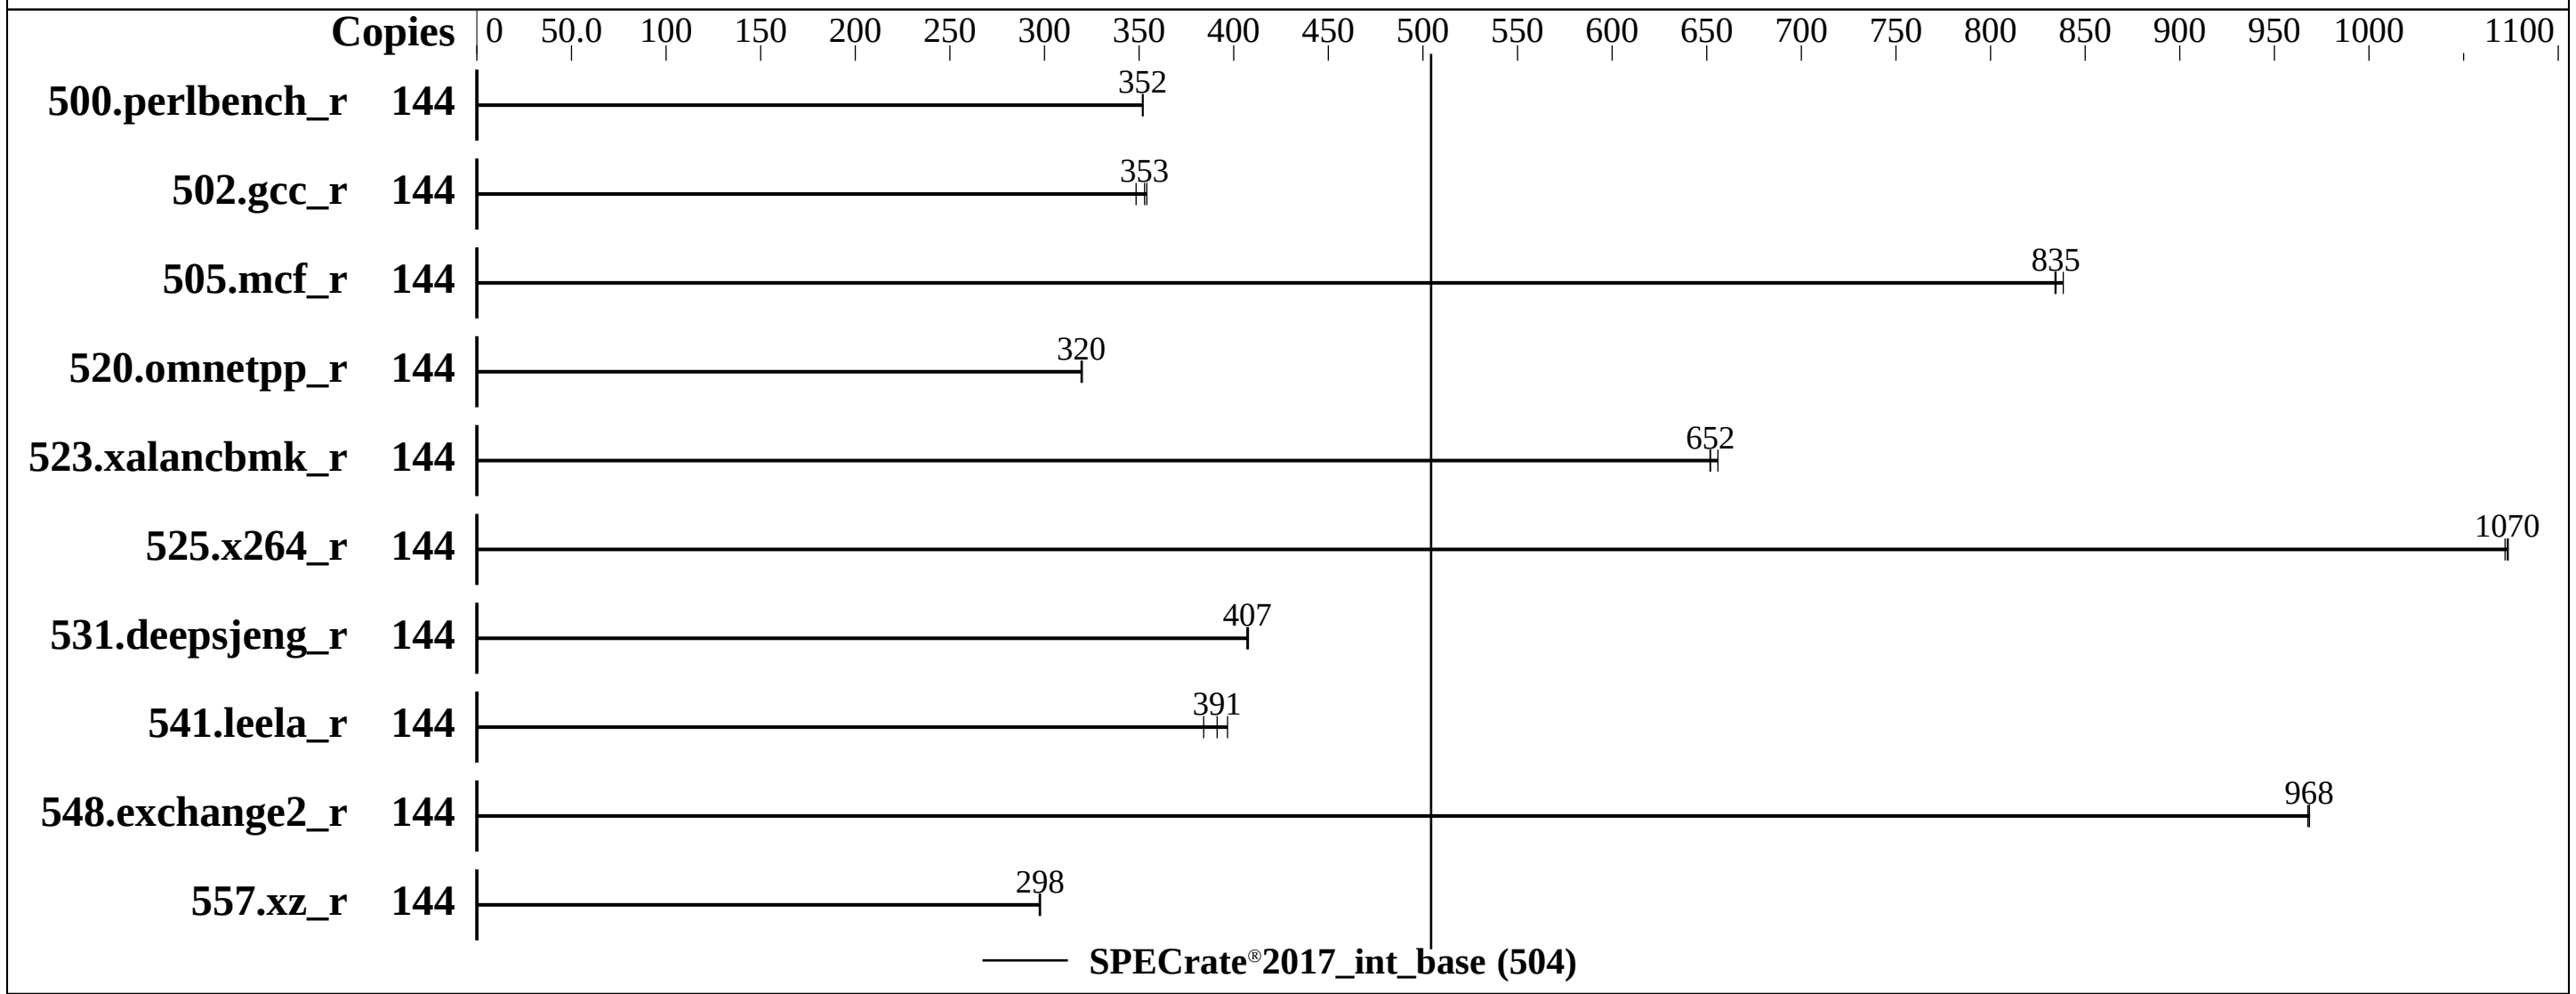


### Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon Gold 5318H |
| Max MHz: | 3800 |
| Nominal: | 2500 |
| Enabled: | 72 cores, 4 chips, 2 threads/core |
| Orderable: | 2,4 chips |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 1 MB I+D on chip per core |
| L3: | 24.75 MB I+D on chip per chip |
| Other: | None |
| Memory: | 3 TB (48 x 64 GB 2Rx4 PC4-3200AA-R, running at 2666) |
| Storage: | 1 x 960 GB SATA SSD |
| Other: | None |

### Software

| | |
|---|---|
| OS: | Red Hat Enterprise Linux 8.3 (Ootpa) Kernel 4.18.0-240.el8.x86_64 |
| Compiler: | C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux; Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux; |
| Parallel: | No |
| Firmware: | Lenovo BIOS Version M5E111G 1.20 released Apr-2021 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | Not Applicable |
| Other: | None |
| Power Management: | BIOS and OS set to prefer performance at the cost of additional power usage |

Lenovo Global Technology
ThinkSystem SR850 V2
(2.50 GHz, Intel Xeon Gold 5318H)

SPECrate®2017_int_base = 504
SPECrate®2017_int_peak = Not Run

**CPU2017 License:** 9017
**Test Sponsor:** Lenovo Global Technology
**Tested by:** Lenovo Global Technology
**Test Date:** Jun-2021
**Hardware Availability:** Nov-2020
**Software Availability:** Dec-2020

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 500.perlbench_r | 144 | 651 | 352 | 652 | 352 | **651** | **352** | | | | | | | |
| 502.gcc_r | 144 | 576 | 354 | **578** | **353** | 585 | 348 | | | | | | | |
| 505.mcf_r | 144 | 278 | 838 | **279** | **835** | 279 | 834 | | | | | | | |
| 520.omnetpp_r | 144 | 590 | 320 | 592 | 319 | **591** | **320** | | | | | | | |
| 523.xalancbmk_r | 144 | **233** | **652** | 233 | 652 | 232 | 656 | | | | | | | |
| 525.x264_r | 144 | 235 | 1070 | **235** | **1070** | 235 | 1070 | | | | | | | |
| 531.deepsjeng_r | 144 | 405 | 407 | 405 | 408 | **405** | **407** | | | | | | | |
| 541.leela_r | 144 | 601 | 397 | **609** | **391** | 621 | 384 | | | | | | | |
| 548.exchange2_r | 144 | 390 | 969 | 390 | 968 | **390** | **968** | | | | | | | |
| 557.xz_r | 144 | 523 | 297 | **522** | **298** | 522 | 298 | | | | | | | |

SPECrate®2017_int_base = 504
SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2017-1.1.8-ic2021.1-revB/lib/intel64:/home/cpu2017-1.1.8-ic202
     1.1-revB/lib/ia32:/home/cpu2017-1.1.8-ic2021.1-revB/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

## General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Red Hat Enterprise Linux 8.1
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
```

(Continued on next page)

## General Notes (Continued)

```
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

## Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance and then set it to Custom Mode
MONITOR/MWAIT set to Enabled
Adjacent Cache Prefetcher set to Disabled
DCU Streamer Prefetcher set to Disabled
SNC set to Enabled
UPI Link Disable set to Disabled 1 Link

 Sysinfo program /home/cpu2017-1.1.8-ic2021.1-revB/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on localhost.localdomain Tue Jun 29 10:02:40 2021

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 5318H CPU @ 2.50GHz
       4  "physical id"s (chips)
       144 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 18
       siblings  : 36
       physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
       physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
       physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
       physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

 From lscpu from util-linux 2.32.1:
      Architecture:        x86_64
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
      CPU(s):              144
      On-line CPU(s) list: 0-143
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      Thread(s) per core:  2
      Core(s) per socket:  18
      Socket(s):           4
      NUMA node(s):        8
      Vendor ID:           GenuineIntel
      CPU family:          6
      Model:               85
      Model name:          Intel(R) Xeon(R) Gold 5318H CPU @ 2.50GHz
      Stepping:            11
      CPU MHz:             3324.979
      CPU max MHz:         3800.0000
      CPU min MHz:         1000.0000
      BogoMIPS:            5000.00
      Virtualization:      VT-x
      L1d cache:           32K
      L1i cache:           32K
      L2 cache:            1024K
      L3 cache:            25344K
      NUMA node0 CPU(s):   0-2,5,6,9,10,14,15,72-74,77,78,81,82,86,87
      NUMA node1 CPU(s):   3,4,7,8,11-13,16,17,75,76,79,80,83-85,88,89
      NUMA node2 CPU(s):   18-20,23,24,27,28,32,33,90-92,95,96,99,100,104,105
      NUMA node3 CPU(s):   21,22,25,26,29-31,34,35,93,94,97,98,101-103,106,107
      NUMA node4 CPU(s):   36-38,41,42,45,46,50,51,108-110,113,114,117,118,122,123
      NUMA node5 CPU(s):   39,40,43,44,47-49,52,53,111,112,115,116,119-121,124,125
      NUMA node6 CPU(s):   54-56,59,60,63,64,68,69,126-128,131,132,135,136,140,141
      NUMA node7 CPU(s):   57,58,61,62,65-67,70,71,129,130,133,134,137-139,142,143
      Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
      invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
      flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms
      invpcid cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt
      avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
      cqm_mbm_total cqm_mbm_local avx512_bf16 dtherm ida arat pln pts pku ospke
      avx512_vnni md_clear flush_l1d arch_capabilities

 /proc/cpuinfo cache data
    cache size : 25344 KB

 From numactl --hardware
 WARNING: a numactl 'node' might or might not correspond to a physical chip.
   available: 8 nodes (0-7)
   node 0 cpus: 0 1 2 5 6 9 10 14 15 72 73 74 77 78 81 82 86 87
   node 0 size: 375032 MB
```

**(Continued on next page)**

## Platform Notes (Continued)

```
    node 0 free: 386149 MB
    node 1 cpus: 3 4 7 8 11 12 13 16 17 75 76 79 80 83 84 85 88 89
    node 1 size: 375551 MB
    node 1 free: 386700 MB
    node 2 cpus: 18 19 20 23 24 27 28 32 33 90 91 92 95 96 99 100 104 105
    node 2 size: 375947 MB
    node 2 free: 386677 MB
    node 3 cpus: 21 22 25 26 29 30 31 34 35 93 94 97 98 101 102 103 106 107
    node 3 size: 377477 MB
    node 3 free: 386589 MB
    node 4 cpus: 36 37 38 41 42 45 46 50 51 108 109 110 113 114 117 118 122 123
    node 4 size: 376789 MB
    node 4 free: 386683 MB
    node 5 cpus: 39 40 43 44 47 48 49 52 53 111 112 115 116 119 120 121 124 125
    node 5 size: 376477 MB
    node 5 free: 386715 MB
    node 6 cpus: 54 55 56 59 60 63 64 68 69 126 127 128 131 132 135 136 140 141
    node 6 size: 375589 MB
    node 6 free: 386672 MB
    node 7 cpus: 57 58 61 62 65 66 67 70 71 129 130 133 134 137 138 139 142 143
    node 7 size: 375570 MB
    node 7 free: 386716 MB
    node distances:
    node   0   1   2   3   4   5   6   7
      0:  10  11  20  20  20  20  30  30
      1:  11  10  20  20  20  20  30  30
      2:  20  20  10  11  30  30  20  20
      3:  20  20  11  10  30  30  20  20
      4:  20  20  30  30  10  11  20  20
      5:  20  20  30  30  11  10  20  20
      6:  30  30  20  20  20  20  10  11
      7:  30  30  20  20  20  20  11  10

  From /proc/meminfo
     MemTotal:       3170395056 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /sbin/tuned-adm active
      Current active profile: throughput-performance

  /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
     performance

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux"
```

(Continued on next page)

## Platform Notes (Continued)

```
      VERSION="8.3 (Ootpa)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="8.3"
      PLATFORM_ID="platform:el8"
      PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
      ANSI_COLOR="0;31"
   redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
   system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

uname -a:
   Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                        Not affected
CVE-2018-3620 (L1 Terminal Fault):                     Not affected
Microarchitectural Data Sampling:                      Not affected
CVE-2017-5754 (Meltdown):                              Not affected
CVE-2018-3639 (Speculative Store Bypass):              Mitigation: Speculative Store
                                                       Bypass disabled via prctl and
                                                       seccomp
CVE-2017-5753 (Spectre variant 1):                     Mitigation: usercopy/swapgs
                                                       barriers and __user pointer
                                                       sanitization
CVE-2017-5715 (Spectre variant 2):                    Mitigation: Enhanced IBRS, IBPB:
                                                       conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort):               Not affected

run-level 3 Jun 29 04:25

SPEC is set to: /home/cpu2017-1.1.8-ic2021.1-revB
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda4      xfs   819G   81G  738G  10% /home

From /sys/devices/virtual/dmi/id
    Vendor:         Lenovo
    Product:        ThinkSystem SR850 V2
    Product Family: ThinkSystem
    Serial:         none

Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
interpret this section. The 'dmidecode' program reads system data which is "intended to
allow hardware to be accurately determined", but the intent may not be met, as there are
```

(Continued on next page)

## Platform Notes (Continued)

```
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     48x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200, configured at 2666

 BIOS:
    BIOS Vendor:       Lenovo
    BIOS Version:      M5E111G-1.20
    BIOS Date:         04/28/2021
    BIOS Revision:     1.20
    Firmware Revision: 1.30

 (End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
        | 525.x264_r(base) 557.xz_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
        | 541.leela_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

# Base Compiler Invocation

C benchmarks:
icx

**(Continued on next page)**

# Base Compiler Invocation (Continued)

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifort`

# Base Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`
502.gcc_r: `-DSPEC_LP64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LP64 -DSPEC_LINUX`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

# Base Optimization Flags

C benchmarks:
```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:
```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:
```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
```

**(Continued on next page)**

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):
-lqkmalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Cooperlake-B.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Cooperlake-B.xml




Tested with SPEC CPU®2017 v1.1.8 on 2021-06-28 22:02:39-0400.
Report generated on 2021-07-21 15:43:53 by CPU2017 PS formatter v6442.
Originally published on 2021-07-20.