SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur TS860M5 (Intel Xeon Platinum 8280)

SPECrate®2017_fp_base = 1140

SPECrate®2017_fp_peak = 1200

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Aug-2021
Hardware Availability: Apr-2019
Software Availability: Dec-2020

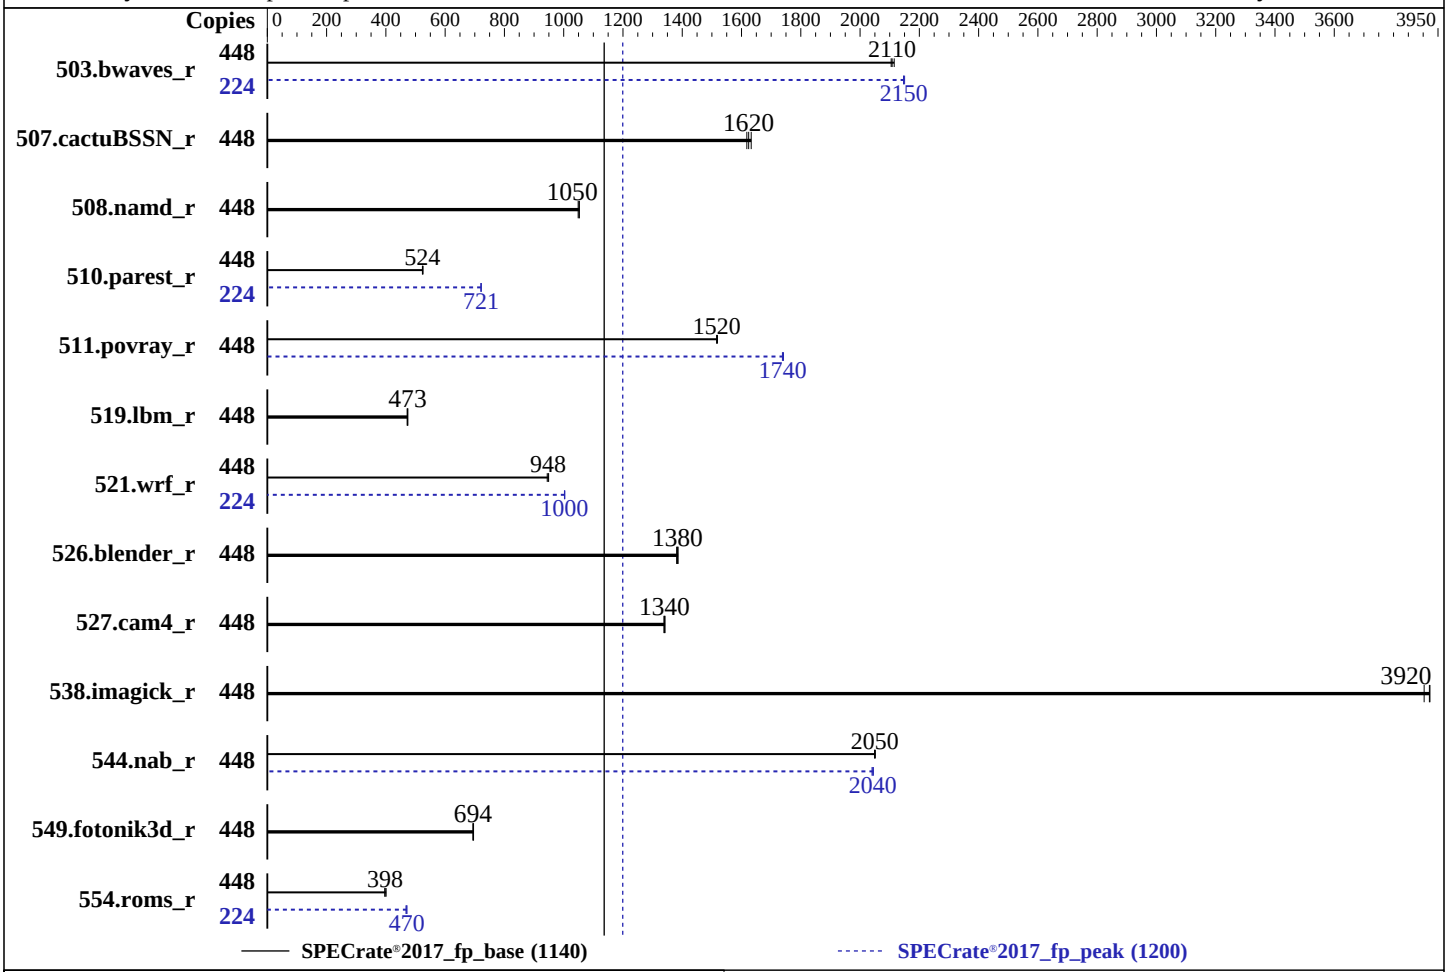

Hardware

CPU Name:	Intel Xeon Platinum 8280
Max MHz:	4000
Nominal:	2700
Enabled:	224 cores, 8 chips, 2 threads/core
Orderable:	2,4,6,8 Chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	38.5 MB I+D on chip per chip
Other:	None
Memory:	3 TB (96 x 32 GB 2Rx4 PC4-2933Y-R)
Storage:	1 x 1.6 TB NVME SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux release 8.2 (Ootpa) 4.18.0-193.el8.x86_64
Compiler:	C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux; C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux; Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux
Parallel:	No
Firmware:	Version 4.5.07 released Jul-2021
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur TS860M5 (Intel Xeon Platinum 8280)

SPECrate®2017_fp_base = 1140

SPECrate®2017_fp_peak = 1200

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Aug-2021
Hardware Availability: Apr-2019
Software Availability: Dec-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	448	2134	2100	2124	2120	**2131**	**2110**	224	1045	2150	1046	2150	**1046**	**2150**
507.cactuBSSN_r	448	347	1630	**349**	**1620**	351	1620	448	347	1630	**349**	**1620**	351	1620
508.namd_r	448	404	1050	**405**	**1050**	406	1050	448	404	1050	**405**	**1050**	406	1050
510.parest_r	448	**2237**	**524**	2231	525	2240	523	224	813	721	**812**	**721**	812	721
511.povray_r	448	**690**	**1520**	689	1520	690	1520	448	601	1740	**601**	**1740**	602	1740
519.lbm_r	448	996	474	**997**	**473**	1001	472	448	996	474	**997**	**473**	1001	472
521.wrf_r	448	1057	949	1063	944	**1059**	**948**	224	**500**	**1000**	500	1000	500	1000
526.blender_r	448	492	1390	**493**	**1380**	494	1380	448	492	1390	**493**	**1380**	494	1380
527.cam4_r	448	586	1340	**585**	**1340**	584	1340	448	586	1340	**585**	**1340**	584	1340
538.imagick_r	448	284	3920	285	3900	**284**	**3920**	448	284	3920	285	3900	**284**	**3920**
544.nab_r	448	368	2050	368	2050	**368**	**2050**	448	**369**	**2040**	369	2050	370	2040
549.fotonik3d_r	448	**2515**	**694**	2516	694	2509	696	448	**2515**	**694**	2516	694	2509	696
554.roms_r	448	1776	401	**1790**	**398**	1797	396	224	761	468	**757**	**470**	756	471

SPECrate®2017_fp_base = 1140

SPECrate®2017_fp_peak = 1200

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
SCALING_GOVERNOR set to Performance
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Red Hat Enterprise Linux 8.1
Transparent Huge Pages enabled by default
Prior to runcpu invocation
```

(Continued on next page)

General Notes (Continued)

```
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5,
and the system compiler gcc 4.8.5;
sources available from jemalloc.net or
https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS configuration:
ENERGY_PERF_BIAS_CFG mode set to Performance
Hardware Prefetch set to Disable
VT Support set to Disable
Sub NUMA Cluster (SNC) set to Enable
IMC (Integrated memory controller) Interleaving set to 1-way
Intel Hyper Threading Technology set to Enable

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Fri Aug 27 02:27:26 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
      8  "physical id"s (chips)
      448 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 28
      siblings  : 56
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
```

(Continued on next page)

Platform Notes (Continued)

```
      physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 4: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 5: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 6: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 7: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30

 From lscpu from util-linux 2.32.1:
      Architecture:        x86_64
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
      CPU(s):              448
      On-line CPU(s) list: 0-447
      Thread(s) per core:  2
      Core(s) per socket:  28
      Socket(s):           8
      NUMA node(s):        16
      Vendor ID:           GenuineIntel
      CPU family:          6
      Model:               85
      Model name:          Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
      Stepping:            7
      CPU MHz:             3467.860
      CPU max MHz:         4000.0000
      CPU min MHz:         1000.0000
      BogoMIPS:            5400.00
      Virtualization:      VT-x
      L1d cache:           32K
      L1i cache:           32K
      L2 cache:            1024K
      L3 cache:            39424K
      NUMA node0 CPU(s):   0-3,7-9,14-17,21-23,224-227,231-233,238-241,245-247
      NUMA node1 CPU(s):   4-6,10-13,18-20,24-27,228-230,234-237,242-244,248-251
      NUMA node2 CPU(s):   28-31,35-37,42-45,49-51,252-255,259-261,266-269,273-275
      NUMA node3 CPU(s):   32-34,38-41,46-48,52-55,256-258,262-265,270-272,276-279
      NUMA node4 CPU(s):   56-59,63-65,70-73,77-79,280-283,287-289,294-297,301-303
      NUMA node5 CPU(s):   60-62,66-69,74-76,80-83,284-286,290-293,298-300,304-307
      NUMA node6 CPU(s):   84-87,91-93,98-101,105-107,308-311,315-317,322-325,329-331
      NUMA node7 CPU(s):   88-90,94-97,102-104,108-111,312-314,318-321,326-328,332-335
      NUMA node8 CPU(s):   112-115,119-121,126-129,133-135,336-339,343-345,350-353,357-359
      NUMA node9 CPU(s):   116-118,122-125,130-132,136-139,340-342,346-349,354-356,360-363
```


(Continued on next page)

Platform Notes (Continued)

```
      NUMA node10 CPU(s):  140-143,147-149,154-157,161-163,364-367,371-373,378-381,385-387
      NUMA node11 CPU(s):  144-146,150-153,158-160,164-167,368-370,374-377,382-384,388-391
      NUMA node12 CPU(s):  168-171,175-177,182-185,189-191,392-395,399-401,406-409,413-415
      NUMA node13 CPU(s):  172-174,178-181,186-188,192-195,396-398,402-405,410-412,416-419
      NUMA node14 CPU(s):  196-199,203-205,210-213,217-219,420-423,427-429,434-437,441-443
      NUMA node15 CPU(s):  200-202,206-209,214-216,220-223,424-426,430-433,438-440,444-447
      Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
      invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
      flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
      cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
      avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
      cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d
      arch_capabilities

  /proc/cpuinfo cache data
     cache size : 39424 KB

  From numactl --hardware
  WARNING: a numactl 'node' might or might not correspond to a physical chip.
    available: 16 nodes (0-15)
    node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 224 225 226 227 231 232 233 238 239 240
    241 245 246 247
    node 0 size: 191590 MB
    node 0 free: 176642 MB
    node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 228 229 230 234 235 236 237 242 243
    244 248 249 250 251
    node 1 size: 193529 MB
    node 1 free: 183007 MB
    node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 252 253 254 255 259 260 261 266
    267 268 269 273 274 275
    node 2 size: 193529 MB
    node 2 free: 183059 MB
    node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 256 257 258 262 263 264 265 270
    271 272 276 277 278 279
    node 3 size: 193529 MB
    node 3 free: 182871 MB
    node 4 cpus: 56 57 58 59 63 64 65 70 71 72 73 77 78 79 280 281 282 283 287 288 289 294
    295 296 297 301 302 303
    node 4 size: 193529 MB
    node 4 free: 183024 MB
    node 5 cpus: 60 61 62 66 67 68 69 74 75 76 80 81 82 83 284 285 286 290 291 292 293 298
    299 300 304 305 306 307
```

(Continued on next page)

Platform Notes (Continued)

```
node 5 size: 193529 MB
node 5 free: 182889 MB
node 6 cpus: 84 85 86 87 91 92 93 98 99 100 101 105 106 107 308 309 310 311 315 316 317
322 323 324 325 329 330 331
node 6 size: 193529 MB
node 6 free: 183007 MB
node 7 cpus: 88 89 90 94 95 96 97 102 103 104 108 109 110 111 312 313 314 318 319 320
321 326 327 328 332 333 334 335
node 7 size: 193529 MB
node 7 free: 182944 MB
node 8 cpus: 112 113 114 115 119 120 121 126 127 128 129 133 134 135 336 337 338 339
343 344 345 350 351 352 353 357 358 359
node 8 size: 193529 MB
node 8 free: 183042 MB
node 9 cpus: 116 117 118 122 123 124 125 130 131 132 136 137 138 139 340 341 342 346
347 348 349 354 355 356 360 361 362 363
node 9 size: 193529 MB
node 9 free: 183056 MB
node 10 cpus: 140 141 142 143 147 148 149 154 155 156 157 161 162 163 364 365 366 367
371 372 373 378 379 380 381 385 386 387
node 10 size: 193529 MB
node 10 free: 183002 MB
node 11 cpus: 144 145 146 150 151 152 153 158 159 160 164 165 166 167 368 369 370 374
375 376 377 382 383 384 388 389 390 391
node 11 size: 193529 MB
node 11 free: 183027 MB
node 12 cpus: 168 169 170 171 175 176 177 182 183 184 185 189 190 191 392 393 394 395
399 400 401 406 407 408 409 413 414 415
node 12 size: 193529 MB
node 12 free: 183075 MB
node 13 cpus: 172 173 174 178 179 180 181 186 187 188 192 193 194 195 396 397 398 402
403 404 405 410 411 412 416 417 418 419
node 13 size: 193502 MB
node 13 free: 183032 MB
node 14 cpus: 196 197 198 199 203 204 205 210 211 212 213 217 218 219 420 421 422 423
427 428 429 434 435 436 437 441 442 443
node 14 size: 193529 MB
node 14 free: 183063 MB
node 15 cpus: 200 201 202 206 207 208 209 214 215 216 220 221 222 223 424 425 426 430
431 432 433 438 439 440 444 445 446 447
node 15 size: 193525 MB
node 15 free: 183055 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
  0:  10  11  21  21  31  31  21  21  31  31  21  21  31  31  31  31
  1:  11  10  21  21  31  31  21  21  31  31  21  21  31  31  31  31
  2:  21  21  10  11  21  21  31  31  21  21  31  31  31  31  31  31
```

(Continued on next page)

Platform Notes (Continued)

```
     3:  21  21  11  10  21  21  31  31  21  21  31  31  31  31  31  31
     4:  31  31  21  21  10  11  21  21  31  31  31  31  21  21  31  31
     5:  31  31  21  21  11  10  21  21  31  31  31  31  21  21  31  31
     6:  21  21  31  31  21  21  10  11  31  31  31  31  31  31  21  21
     7:  21  21  31  31  21  21  11  10  31  31  31  31  31  31  21  21
     8:  31  31  21  21  31  31  31  31  10  11  21  21  31  31  21  21
     9:  31  31  21  21  31  31  31  31  11  10  21  21  31  31  21  21
    10:  21  21  31  31  31  31  31  31  21  21  10  11  21  21  31  31
    11:  21  21  31  31  31  31  31  31  21  21  11  10  21  21  31  31
    12:  31  31  31  31  21  21  31  31  31  31  21  21  10  11  21  21
    13:  31  31  31  31  21  21  31  31  31  31  21  21  11  10  21  21
    14:  31  31  31  31  31  31  21  21  21  21  31  31  21  21  10  11
    15:  31  31  31  31  31  31  21  21  21  21  31  31  21  21  11  10

From /proc/meminfo
   MemTotal:       3168771572 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/sbin/tuned-adm active
    Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
   performance

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux"
      VERSION="8.2 (Ootpa)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="8.2"
      PLATFORM_ID="platform:el8"
      PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
      ANSI_COLOR="0;31"
   redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
   system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga

uname -a:
   Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                    KVM: Vulnerable
CVE-2018-3620 (L1 Terminal Fault):                 Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
 Microarchitectural Data Sampling:                       Not affected
 CVE-2017-5754 (Meltdown):                               Not affected
 CVE-2018-3639 (Speculative Store Bypass):               Mitigation: Speculative Store
                                                         Bypass disabled via prctl and
                                                         seccomp
 CVE-2017-5753 (Spectre variant 1):                      Mitigation: usercopy/swapgs
                                                         barriers and __user pointer
                                                         sanitization
 CVE-2017-5715 (Spectre variant 2):                      Mitigation: Enhanced IBRS, IBPB:
                                                         conditional, RSB filling
 CVE-2020-0543 (Special Register Buffer Data Sampling): No status reported
 CVE-2019-11135 (TSX Asynchronous Abort):                Mitigation: Clear CPU buffers; SMT
                                                         vulnerable

 run-level 3 Aug 26 17:15

 SPEC is set to: /home/cpu2017
    Filesystem           Type  Size  Used Avail Use% Mounted on
    /dev/mapper/rhel-home xfs   1.0T  181G  844G  18% /home

 From /sys/devices/virtual/dmi/id
     Vendor:         Inspur
     Product:        TS860M5
     Product Family: Type1Family
     Serial:         219177631

 Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
 interpret this section. The 'dmidecode' program reads system data which is "intended to
 allow hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     96x Hynix HMA84GR7CJR4N-WM 32 GB 2 rank 2933

 BIOS:
    BIOS Vendor:       Inspur
    BIOS Version:      4.5.07
    BIOS Date:         07/19/2021
    BIOS Revision:     4.5

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```


(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base, peak)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icx

(Continued on next page)

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries -ljemalloc

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks (continued):
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:

521.wrf_r: ifort icc

527.cam4_r: ifort icx

Benchmarks using both C and C++:

(Continued on next page)

Peak Compiler Invocation (Continued)

511.povray_r: icpc icc

526.blender_r: icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -flto
-Ofast -qopt-mem-layout-trans=4
-fimf-accuracy-bits=14:sqrt
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)

Peak Optimization Flags (Continued)

549.fotonik3d_r: `basepeak = yes`

554.roms_r: `Same as 503.bwaves_r`

Benchmarks using both Fortran and C:

521.wrf_r: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2 -O3 -ipo -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries -nostandard-realloc-lhs -align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

527.cam4_r: `basepeak = yes`

Benchmarks using both C and C++:

511.povray_r: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2 -O3 -ipo -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

526.blender_r: `basepeak = yes`

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html`
`http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V2.1.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml`
`http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V2.1.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-08-26 14:27:26-0400.
Report generated on 2021-09-14 19:19:35 by CPU2017 PS formatter v6442.
Originally published on 2021-09-14.