SPEC CPU®2017 Floating Point Rate Result

Cisco Systems

Cisco UCS B200 M6 (Intel Xeon Gold 6312U, 2.40GHz)

SPECrate®2017_fp_base = 175

SPECrate®2017_fp_peak = Not Run

CPU2017 License:	9019	**Test Date:**	Sep-2021
Test Sponsor:	Cisco Systems	**Hardware Availability:**	Apr-2021
Tested by:	Cisco Systems	**Software Availability:**	Dec-2020

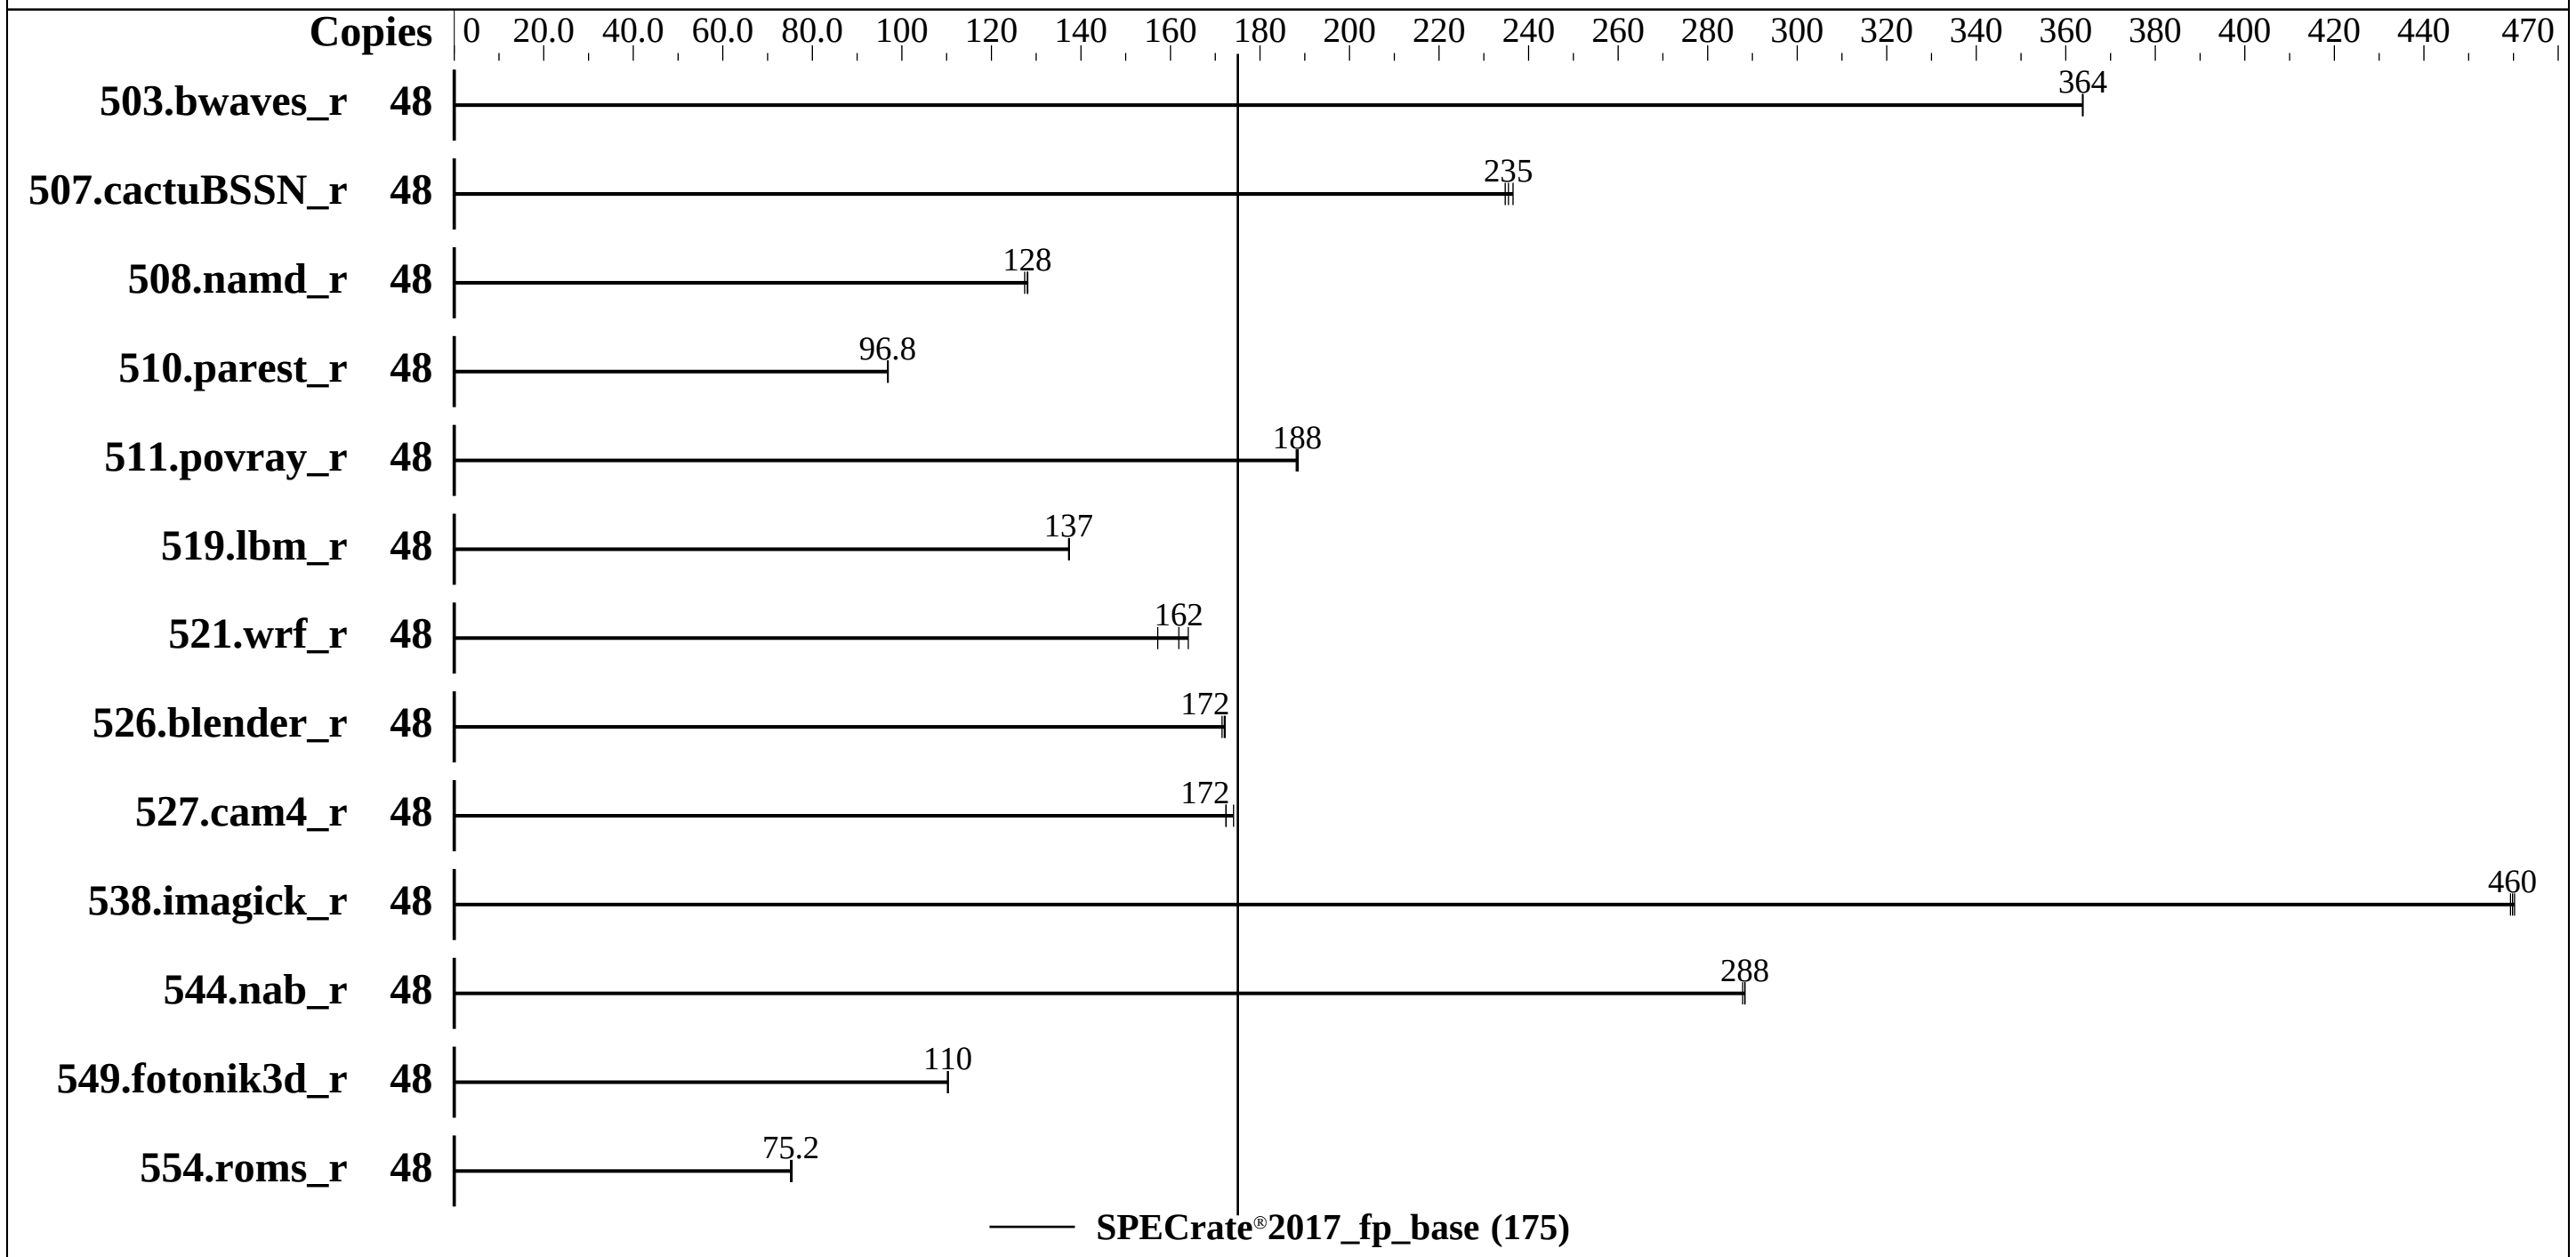

Hardware

CPU Name:	Intel Xeon Gold 6312U
Max MHz:	3600
Nominal:	2400
Enabled:	24 cores, 1 chip, 2 threads/core
Orderable:	1 Chip
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1.25 MB I+D on chip per core
L3:	36 MB I+D on chip per chip
Other:	None
Memory:	512 GB (8 x 64 GB 2Rx4 PC4-3200V-R)
Storage:	1 x 240 GB M.2 SSD SATA
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP2 5.3.18-22-default
Compiler:	C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux; Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux
Parallel:	No
Firmware:	Version 4.2.1d released Jul-2021
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Rate Result

Cisco Systems

Cisco UCS B200 M6 (Intel Xeon Gold 6312U, 2.40GHz)

SPECrate®2017_fp_base = 175

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems
Test Date: Sep-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	48	1323	364	**1323**	**364**	1323	364							
507.cactuBSSN_r	48	257	237	**258**	**235**	259	235							
508.namd_r	48	**356**	**128**	356	128	358	127							
510.parest_r	48	1297	96.8	**1297**	**96.8**	1295	96.9							
511.povray_r	48	596	188	595	189	**595**	**188**							
519.lbm_r	48	**369**	**137**	368	137	369	137							
521.wrf_r	48	**664**	**162**	656	164	684	157							
526.blender_r	48	**425**	**172**	426	172	425	172							
527.cam4_r	48	**487**	**172**	482	174	487	172							
538.imagick_r	48	259	460	260	459	**260**	**460**							
544.nab_r	48	281	288	**280**	**288**	280	288							
549.fotonik3d_r	48	1698	110	1695	110	**1696**	**110**							
554.roms_r	48	**1014**	**75.2**	1015	75.1	1011	75.5							

SPECrate®2017_fp_base = 175

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7940X CPU + 64GB RAM
memory using openSUSE Leap 15.2
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
```

(Continued on next page)

General Notes (Continued)

```
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Settings:
Adjacent Cache Line Prefetcher set to Disabled
DCU Streamer Prefetch set to Disabled
LLC Dead Line set to Disabled
Memory Refresh Rate set to 1x Refresh
Sub NUMA Clustering set to Enabled
Patrol Scrub set to Disabled
Processor C6 Report set to Enabled

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on localhost Thu Sep  9 04:58:15 2021

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 6312U CPU @ 2.40GHz
       1  "physical id"s (chips)
       48 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 24
       siblings  : 48
       physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23

 From lscpu from util-linux 2.33.1:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
```

(Continued on next page)

Platform Notes (Continued)

```
      Address sizes:       46 bits physical, 57 bits virtual
      CPU(s):              48
      On-line CPU(s) list: 0-47
      Thread(s) per core:  2
      Core(s) per socket:  24
      Socket(s):           1
      NUMA node(s):        2
      Vendor ID:           GenuineIntel
      CPU family:          6
      Model:               106
      Model name:          Intel(R) Xeon(R) Gold 6312U CPU @ 2.40GHz
      Stepping:            6
      CPU MHz:             3265.412
      CPU max MHz:         3600.0000
      CPU min MHz:         800.0000
      BogoMIPS:            4800.00
      Virtualization:      VT-x
      L1d cache:           48K
      L1i cache:           32K
      L2 cache:            1280K
      L3 cache:            36864K
      NUMA node0 CPU(s):   0-11,24-35
      NUMA node1 CPU(s):   12-23,36-47
      Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd
      mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad
      fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f
      avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
      avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
      cqm_mbm_local wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
      hwp_pkg_req avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
      avx512_bitalg tme avx512_vpopcntdq la57 rdpid md_clear pconfig flush_l1d
      arch_capabilities

 /proc/cpuinfo cache data
    cache size : 36864 KB

 From numactl --hardware
 WARNING: a numactl 'node' might or might not correspond to a physical chip.
   available: 2 nodes (0-1)
   node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 24 25 26 27 28 29 30 31 32 33 34 35
   node 0 size: 257530 MB
   node 0 free: 257134 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node 1 cpus: 12 13 14 15 16 17 18 19 20 21 22 23 36 37 38 39 40 41 42 43 44 45 46 47
  node 1 size: 257762 MB
  node 1 free: 257361 MB
  node distances:
  node   0   1
    0:  10  11
    1:  11  10

From /proc/meminfo
   MemTotal:       527660216 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
   performance

From /etc/*release* /etc/*version*
   os-release:
      NAME="SLES"
      VERSION="15-SP2"
      VERSION_ID="15.2"
      PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
      ID="sles"
      ID_LIKE="suse"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:15:sp2"

uname -a:
   Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aeba) x86_64
   x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                        Not affected
CVE-2018-3620 (L1 Terminal Fault):                     Not affected
Microarchitectural Data Sampling:                      Not affected
CVE-2017-5754 (Meltdown):                              Not affected
CVE-2018-3639 (Speculative Store Bypass):              Mitigation: Speculative Store
                                                       Bypass disabled via prctl and
                                                       seccomp
CVE-2017-5753 (Spectre variant 1):                     Mitigation: usercopy/swapgs
                                                       barriers and __user pointer
                                                       sanitization
CVE-2017-5715 (Spectre variant 2):                    Mitigation: Enhanced IBRS, IBPB:
                                                       conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort):               Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
 run-level 3 Sep 9 04:57

 SPEC is set to: /home/cpu2017
    Filesystem     Type   Size  Used Avail Use% Mounted on
    /dev/sda2      btrfs  222G  9.1G  212G   5% /home

 From /sys/devices/virtual/dmi/id
     Vendor:         Cisco Systems Inc
     Product:        UCSB-B200-M6
     Serial:         FCH24097576

 Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
 interpret this section. The 'dmidecode' program reads system data which is "intended to
 allow hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     8x 0xCE00 M393A8G40AB2-CWE 64 GB 2 rank 3200
     24x NO DIMM NO DIMM

 BIOS:
    BIOS Vendor:       Cisco Systems, Inc.
    BIOS Version:      B200M6.4.2.1d.0.0730210924
    BIOS Date:         07/30/2021
    BIOS Revision:     5.22

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C                | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++              | 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html
http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-ICX-revG.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml
http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-ICX-revG.xml

Tested with SPEC CPU®2017 v1.1.8 on 2021-09-09 07:58:15-0400.
Report generated on 2021-09-29 12:25:05 by CPU2017 PS formatter v6442.
Originally published on 2021-09-28.