SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6515 (AMD EPYC 7663 56-Core Processor)

SPECrate®2017_fp_base = 281

SPECrate®2017_fp_peak = 283

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: May-2021
Hardware Availability: Jul-2021
Software Availability: Mar-2021

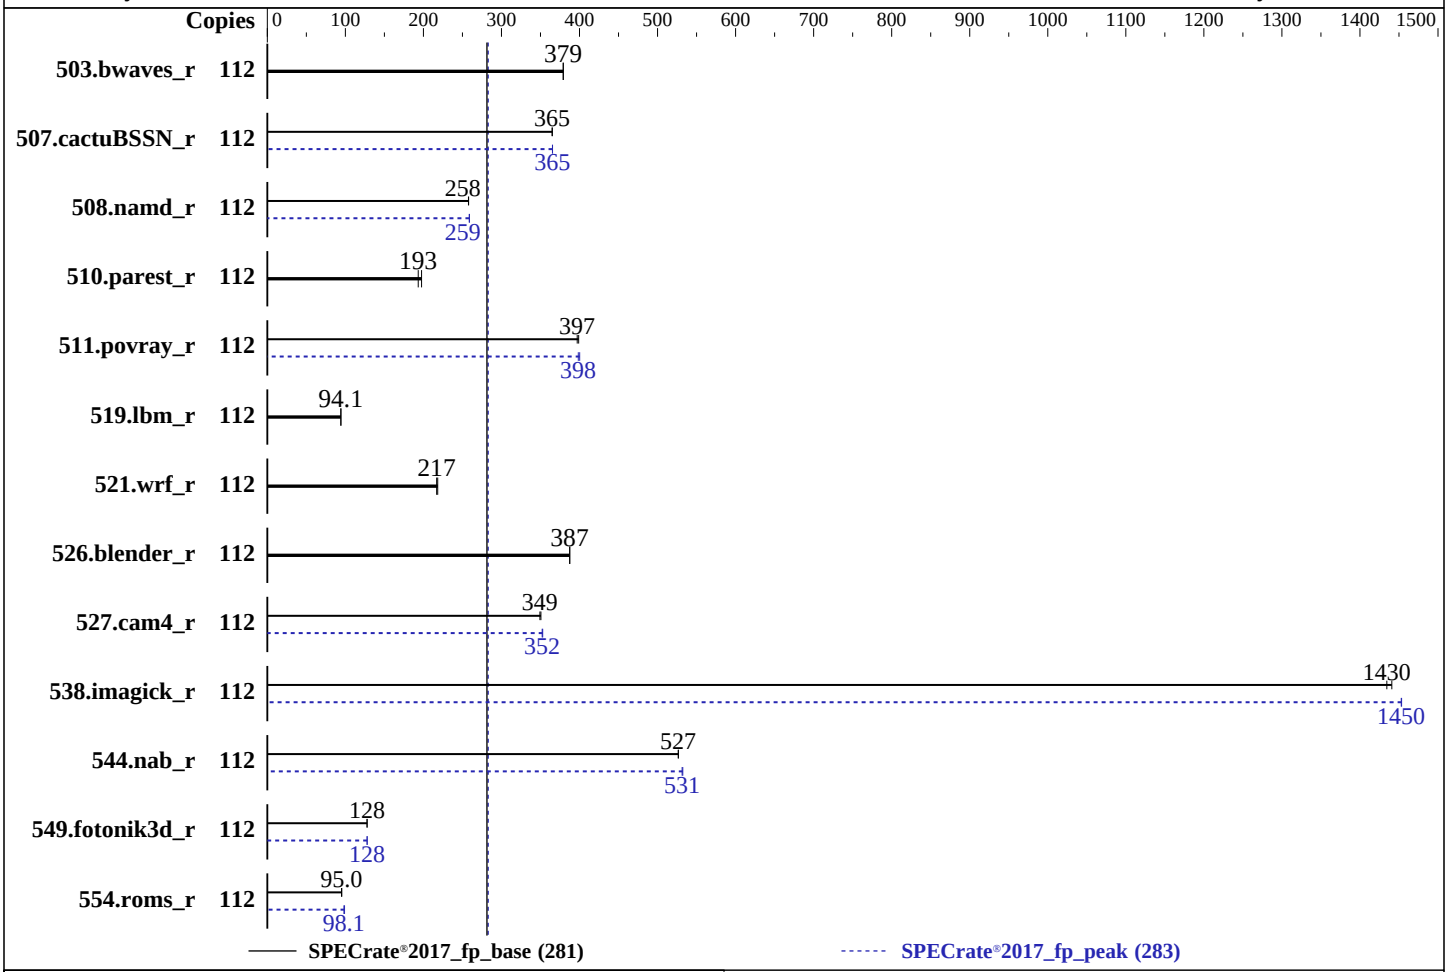

Hardware

CPU Name:	AMD EPYC 7663
Max MHz:	3500
Nominal:	2000
Enabled:	56 cores, 1 chip, 2 threads/core
Orderable:	1 chip
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	256 MB I+D on chip per chip, 32 MB shared / 7 cores
Other:	None
Memory:	1 TB (8 x 128 GB 4Rx4 PC4-3200AA-R)
Storage:	128 GB on tmpfs
Other:	None

Software

OS:	Red Hat Enterprise Linux 8.3 (Ootpa) 4.18.0-240.el8.x86_64
Compiler:	C/C++/Fortran: Version 3.0.0 of AOCC
Parallel:	No
Firmware:	Version 2.2.4 released Apr-2021
File System:	tmpfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc: jemalloc memory allocator library v5.1.0
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	112	**2962**	**379**	2962	379			112	**2962**	**379**	2962	379		
507.cactuBSSN_r	112	388	365	**389**	**365**			112	388	365	**388**	**365**		
508.namd_r	112	413	258	**413**	**258**			112	**411**	**259**	411	259		
510.parest_r	112	**1515**	**193**	1483	198			112	**1515**	**193**	1483	198		
511.povray_r	112	656	399	**659**	**397**			112	**656**	**398**	653	400		
519.lbm_r	112	1251	94.4	**1254**	**94.1**			112	1251	94.4	**1254**	**94.1**		
521.wrf_r	112	**1156**	**217**	1149	218			112	**1156**	**217**	1149	218		
526.blender_r	112	440	388	**440**	**387**			112	440	388	**440**	**387**		
527.cam4_r	112	559	351	**561**	**349**			112	**556**	**352**	555	353		
538.imagick_r	112	193	1440	**194**	**1430**			112	192	1450	**192**	**1450**		
544.nab_r	112	358	527	**358**	**527**			112	**355**	**531**	354	532		
549.fotonik3d_r	112	**3415**	**128**	3414	128			112	3412	128	**3414**	**128**		
554.roms_r	112	**1873**	**95.0**	1864	95.5			112	1799	98.9	**1813**	**98.1**		

SPECrate®2017_fp_base = 281

SPECrate®2017_fp_peak = 283

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu
ASLR is disabled to reduce run-to-run issues.
```

(Continued on next page)

Operating System Notes (Continued)

```
dirty_ratio, swappiness, zone_reclaim_mode, drop_caches and ASLR were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for Int Peak, FP Base/Peak (OS default)
Transparent huge pages set to 'madvise' for Int Base
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/mnt/ramdisk/cpu2017-1.1.7-aocc300/amd_rate_aocc300_milan_A_lib/64;/mnt
     /ramdisk/cpu2017-1.1.7-aocc300/amd_rate_aocc300_milan_A_lib/32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 512GiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.


jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2
```

Platform Notes

```
 BIOS settings:
        Memory Interleaving : Auto
      NUMA Nodes per Socket : 4
    L3 Cache as NUMA Domain : Enabled
  Virtualization Technology : Disabled
         DRAM Refresh Delay : Performance

             System Profile : Custom
       CPU Power Management : Maximum Performance
        Memory Patrol Scrub : Disabled
```

(Continued on next page)

Platform Notes (Continued)

```
        PCI ASPM L1 Link    : Disabled
           Power Management : Disabled

 Sysinfo program /mnt/ramdisk/cpu2017-1.1.7-aocc300/bin/sysinfo
 Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
 running on rhel-8-3-amd Fri May 14 16:32:49 2021

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD EPYC 7663 56-Core Processor
       1  "physical id"s (chips)
       112 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 56
       siblings  : 112
       physical 0: cores 0 1 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27 28 29 30
       32 33 34 35 36 37 38 40 41 42 43 44 45 46 48 49 50 51 52 53 54 56 57 58 59 60 61 62

 From lscpu:
      Architecture:        x86_64
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
      CPU(s):              112
      On-line CPU(s) list: 0-111
      Thread(s) per core:  2
      Core(s) per socket:  56
      Socket(s):           1
      NUMA node(s):        8
      Vendor ID:           AuthenticAMD
      CPU family:          25
      Model:               1
      Model name:          AMD EPYC 7663 56-Core Processor
      Stepping:            1
      CPU MHz:             2747.514
      BogoMIPS:            3992.53
      Virtualization:      AMD-V
      L1d cache:           32K
      L1i cache:           32K
      L2 cache:            512K
      L3 cache:            32768K
      NUMA node0 CPU(s):   0,8,16,24,32,40,48,56,64,72,80,88,96,104
      NUMA node1 CPU(s):   1,9,17,25,33,41,49,57,65,73,81,89,97,105
      NUMA node2 CPU(s):   2,10,18,26,34,42,50,58,66,74,82,90,98,106
```

(Continued on next page)

Platform Notes (Continued)

```
      NUMA node3 CPU(s):   3,11,19,27,35,43,51,59,67,75,83,91,99,107
      NUMA node4 CPU(s):   4,12,20,28,36,44,52,60,68,76,84,92,100,108
      NUMA node5 CPU(s):   5,13,21,29,37,45,53,61,69,77,85,93,101,109
      NUMA node6 CPU(s):   6,14,22,30,38,46,54,62,70,78,86,94,102,110
      NUMA node7 CPU(s):   7,15,23,31,39,47,55,63,71,79,87,95,103,111
      Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
      constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
      monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c
      rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
      osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
      cat_l3 cdp_l3 invpcid_single hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall
      fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap clflushopt clwb
      sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
      cqm_mbm_local clzero irperf xsaveerptr wbnoinvd amd_ppin arat npt lbrv svm_lock
      nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
      v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

  /proc/cpuinfo cache data
     cache size : 512 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 8 nodes (0-7)
    node 0 cpus: 0 8 16 24 32 40 48 56 64 72 80 88 96 104
    node 0 size: 128495 MB
    node 0 free: 124528 MB
    node 1 cpus: 1 9 17 25 33 41 49 57 65 73 81 89 97 105
    node 1 size: 128942 MB
    node 1 free: 128847 MB
    node 2 cpus: 2 10 18 26 34 42 50 58 66 74 82 90 98 106
    node 2 size: 128901 MB
    node 2 free: 128792 MB
    node 3 cpus: 3 11 19 27 35 43 51 59 67 75 83 91 99 107
    node 3 size: 128926 MB
    node 3 free: 128853 MB
    node 4 cpus: 4 12 20 28 36 44 52 60 68 76 84 92 100 108
    node 4 size: 128926 MB
    node 4 free: 128816 MB
    node 5 cpus: 5 13 21 29 37 45 53 61 69 77 85 93 101 109
    node 5 size: 128946 MB
    node 5 free: 128860 MB
    node 6 cpus: 6 14 22 30 38 46 54 62 70 78 86 94 102 110
    node 6 size: 128962 MB
    node 6 free: 128751 MB
    node 7 cpus: 7 15 23 31 39 47 55 63 71 79 87 95 103 111
    node 7 size: 128945 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node 7 free: 128632 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  11  12  12  12  12  12  12
    1:  11  10  12  12  12  12  12  12
    2:  12  12  10  11  12  12  12  12
    3:  12  12  11  10  12  12  12  12
    4:  12  12  12  12  10  11  12  12
    5:  12  12  12  12  11  10  12  12
    6:  12  12  12  12  12  12  10  11
    7:  12  12  12  12  12  12  11  10

From /proc/meminfo
   MemTotal:       1056433132 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/sbin/tuned-adm active
    Current active profile: throughput-performance

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux"
      VERSION="8.3 (Ootpa)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="8.3"
      PLATFORM_ID="platform:el8"
      PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
      ANSI_COLOR="0;31"
   redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
   system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

uname -a:
   Linux rhel-8-3-amd 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020 x86_64
   x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                    Not affected
CVE-2018-3620 (L1 Terminal Fault):                 Not affected
Microarchitectural Data Sampling:                  Not affected
CVE-2017-5754 (Meltdown):                          Not affected
CVE-2018-3639 (Speculative Store Bypass):          Mitigation: Speculative Store
                                                   Bypass disabled via prctl and
                                                   seccomp
```

(Continued on next page)

Platform Notes (Continued)

```
 CVE-2017-5753 (Spectre variant 1):                    Mitigation: usercopy/swapgs
                                                       barriers and __user pointer
                                                       sanitization
 CVE-2017-5715 (Spectre variant 2):                    Mitigation: Full AMD retpoline,
                                                     IBPB: conditional, IBRS_FW, STIBP:
                                                       always-on, RSB filling
 CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
 CVE-2019-11135 (TSX Asynchronous Abort):              Not affected

 run-level 3 May 14 10:46

 SPEC is set to: /mnt/ramdisk/cpu2017-1.1.7-aocc300
    Filesystem     Type   Size  Used Avail Use% Mounted on
    tmpfs          tmpfs  128G  3.7G  125G   3% /mnt/ramdisk

 From /sys/devices/virtual/dmi/id
     Vendor:         Dell Inc.
     Product:        PowerEdge R6515
     Product Family: PowerEdge
     Serial:         HTDRG13

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     8x 802C8632802C 72ASS16G72LZ-3G2B3 128 GB 4 rank 3200
     8x Not Specified Not Specified

 BIOS:
    BIOS Vendor:       Dell Inc.
    BIOS Version:      2.2.4
    BIOS Date:         04/12/2021
    BIOS Revision:     2.2

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using both C and C++:
`clang++ clang`

(Continued on next page)

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti

C++ benchmarks:
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks (continued):
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -lamdlibm -ljemalloc
-lflang -lflangrti

Benchmarks using both Fortran and C:
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Kieee -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti

Benchmarks using both C and C++:
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti

Benchmarks using Fortran, C, and C++:
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Kieee -Mrecursive -mllvm -fuse-tile-inner-loop
-funroll-loops -mllvm -lsr-in-nested-loop -z muldefs -lamdlibm
-ljemalloc -lflang -lflangrti

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:
-Wno-unused-command-line-argument

Benchmarks using both C and C++:
-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:
-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: -m64 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc

544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays

(Continued on next page)

Peak Optimization Flags (Continued)

544.nab_r (continued):
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc

C++ benchmarks:

508.namd_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc

510.parest_r: basepeak = yes

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-lamdlibm -ljemalloc -lflang -lflangrti

554.roms_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-Hz,1,0x1 -mllvm -fuse-tile-inner-loop -lamdlibm

(Continued on next page)

Peak Optimization Flags (Continued)

554.roms_r (continued):
-ljemalloc -lflang -lflangrti

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-force-vector-interleave=1 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -O3 -ffast-math
-funroll-loops -mllvm -extra-vectorizer-passes
-mllvm -lsr-in-nested-loop -Mrecursive -lamdlibm
-ljemalloc -lflang -lflangrti

Benchmarks using both C and C++:

511.povray_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -finline-aggressive
-mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -lamdlibm -ljemalloc

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3

(Continued on next page)

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):
-fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-finline-aggressive -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -convert-pow-exp-to-int=false -Kieee -Mrecursive -lamdlibm
-ljemalloc -lflang -lflangrti

Peak Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:
-Wno-unused-command-line-argument

Benchmarks using both C and C++:
-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:
-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-Milan-rev2.3.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-Milan-rev2.3.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.7 on 2021-05-14 17:32:48-0400.
Report generated on 2021-09-29 13:25:05 by CPU2017 PS formatter v6442.
Originally published on 2021-09-29.