# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635
2.65 GHz, AMD EPYC 7413

**SPECrate®2017_fp_base = 208**

**SPECrate®2017_fp_peak = 216**

**CPU2017 License:** 9017
**Test Sponsor:** Lenovo Global Technology
**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2021
**Hardware Availability:** Jun-2021
**Software Availability:** Mar-2021

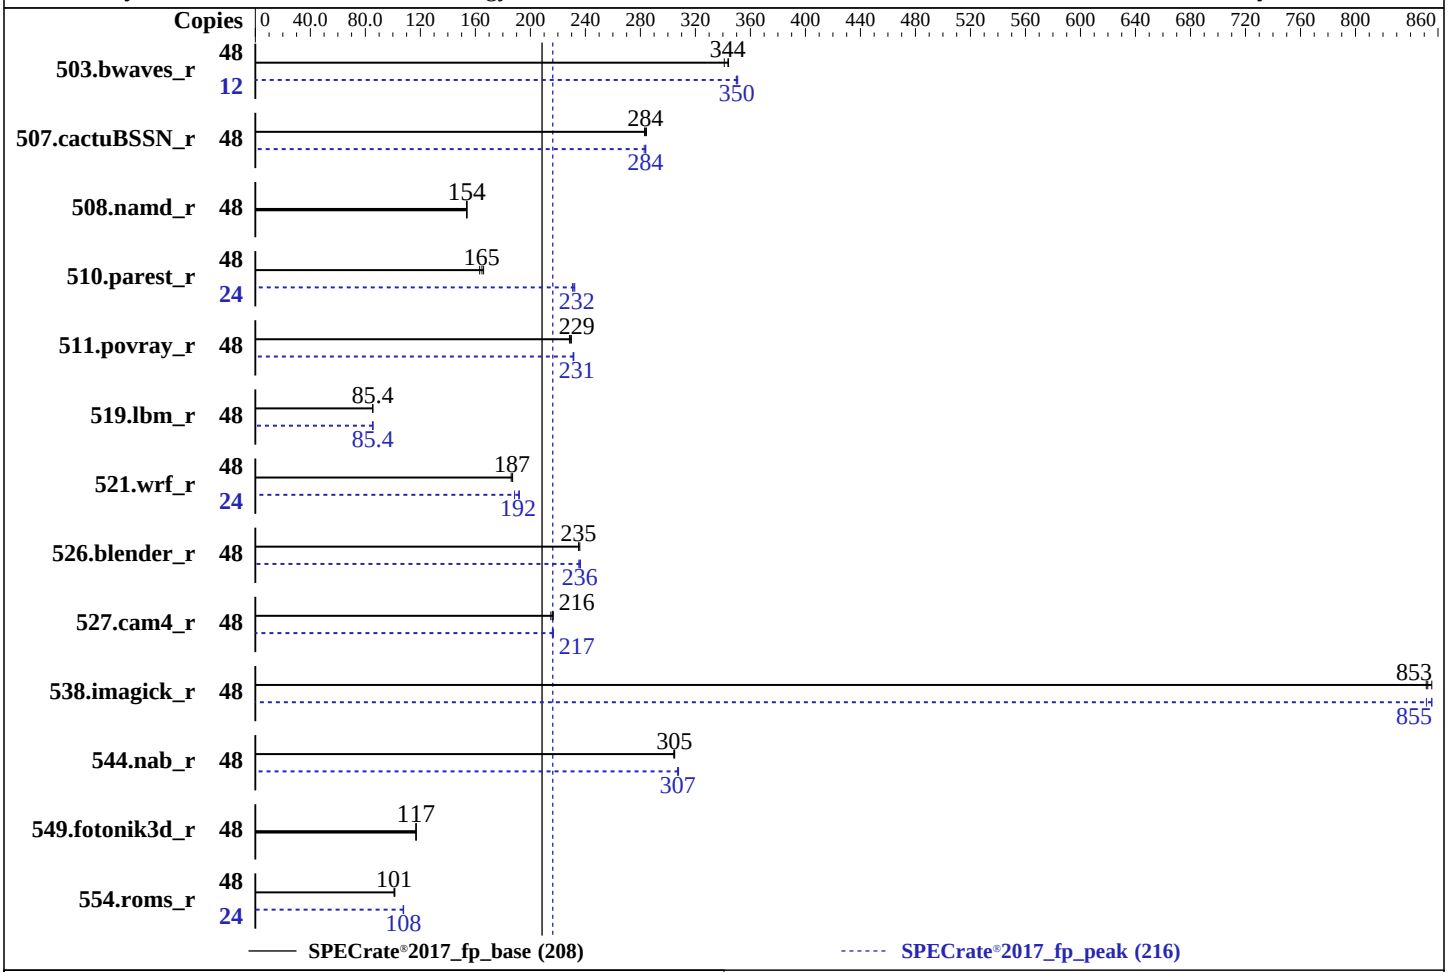


## Hardware

| | |
|---|---|
| CPU Name: | AMD EPYC 7413 |
| Max MHz: | 3600 |
| Nominal: | 2650 |
| Enabled: | 24 cores, 1 chip, 2 threads/core |
| Orderable: | 1 chip |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 512 KB I+D on chip per core |
| L3: | 128 MB I+D on chip per chip, 32 MB shared / 6 cores |
| Other: | None |
| Memory: | 256 GB (8 x 32 GB 2Rx4 PC4-3200AA-R) |
| Storage: | 1 x 960 GB SATA SSD |
| Other: | None |

## Software

| | |
|---|---|
| OS: | SUSE Linux Enterprise Server 15 SP2 (x86_64) Kernel 5.3.18-22-default |
| Compiler: | C/C++/Fortran: Version 3.0.0 of AOCC |
| Parallel: | No |
| Firmware: | Lenovo BIOS Version CFE125V 6.10 released Jun-2021 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | jemalloc: jemalloc memory allocator library v5.1.0 |
| Power Management: | BIOS and OS set to prefer performance at the cost of additional power usage |

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 503.bwaves_r | 48 | 1399 | 344 | 1412 | 341 | **1401** | **344** | 12 | 343 | 351 | 344 | 350 | **344** | **350** |
| 507.cactuBSSN_r | 48 | 215 | 283 | 214 | 284 | **214** | **284** | 48 | 215 | 283 | **214** | **284** | 214 | 284 |
| 508.namd_r | 48 | **296** | **154** | 296 | 154 | 297 | 154 | 48 | **296** | **154** | 296 | 154 | 297 | 154 |
| 510.parest_r | 48 | **762** | **165** | 770 | 163 | 756 | 166 | 24 | 272 | 231 | 270 | 232 | **271** | **232** |
| 511.povray_r | 48 | **489** | **229** | 491 | 228 | 488 | 230 | 48 | 484 | 232 | **485** | **231** | 485 | 231 |
| 519.lbm_r | 48 | 592 | 85.4 | **593** | **85.4** | 593 | 85.3 | 48 | 592 | 85.5 | **592** | **85.4** | 593 | 85.4 |
| 521.wrf_r | 48 | **576** | **187** | 575 | 187 | 578 | 186 | 24 | 280 | 192 | 285 | 188 | **281** | **192** |
| 526.blender_r | 48 | **311** | **235** | 311 | 235 | 310 | 236 | 48 | 311 | 235 | **310** | **236** | 309 | 236 |
| 527.cam4_r | 48 | **389** | **216** | 391 | 215 | 387 | 217 | 48 | 387 | 217 | 389 | 216 | **388** | **217** |
| 538.imagick_r | 48 | **140** | **853** | 140 | 855 | 140 | 851 | 48 | 140 | 852 | **140** | **855** | 140 | 856 |
| 544.nab_r | 48 | 265 | 304 | 265 | 305 | **265** | **305** | 48 | **263** | **307** | 262 | 308 | 263 | 307 |
| 549.fotonik3d_r | 48 | 1601 | 117 | 1600 | 117 | **1600** | **117** | 48 | 1601 | 117 | 1600 | 117 | **1600** | **117** |
| 554.roms_r | 48 | 752 | 101 | 756 | 101 | **755** | **101** | 24 | 355 | 107 | **354** | **108** | 354 | 108 |

**SPECrate®2017_fp_base = 208**

**SPECrate®2017_fp_peak = 216**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

## Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

## Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of
memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum
necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory
and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
```

**(Continued on next page)**

## Operating System Notes (Continued)

'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout randomization (ASLR) to reduce run-to-run variability.
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root for peak integer runs and all FP runs to enable Transparent Hugepages (THP).
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root for base integer runs to enable THP only on request.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/cpu2017-1.1.8-amd-aocc300-milan-A1/amd_rate_aocc300_milan_A_lib/64;/home/cpu2017-1.1.8-amd-aocc300-milan-A1/amd_rate_aocc300_milan_A_lib/32:"
MALLOC_CONF = "retain:true"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 512GiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2

## Platform Notes

BIOS configuration:
Choose Operating Mode set to Maximum Performance
NUMA nodes per socket set to NPS4
L1 Stream HW Prefetcher set to Disable

Sysinfo program /home/cpu2017-1.1.8-amd-aocc300-milan-A1/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost Tue Sep 14 01:28:40 2021

SUT (System Under Test) info as seen by some common utilities.

**(Continued on next page)**

## Platform Notes (Continued)

```
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : AMD EPYC 7413 24-Core Processor
      1  "physical id"s (chips)
      48 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 24
      siblings  : 48
      physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

From lscpu from util-linux 2.33.1:
     Architecture:        x86_64
     CPU op-mode(s):      32-bit, 64-bit
     Byte Order:          Little Endian
     Address sizes:       48 bits physical, 48 bits virtual
     CPU(s):              48
     On-line CPU(s) list: 0-47
     Thread(s) per core:  2
     Core(s) per socket:  24
     Socket(s):           1
     NUMA node(s):        4
     Vendor ID:           AuthenticAMD
     CPU family:          25
     Model:               1
     Model name:          AMD EPYC 7413 24-Core Processor
     Stepping:            1
     CPU MHz:             1795.788
     CPU max MHz:         2650.0000
     CPU min MHz:         1500.0000
     BogoMIPS:            5290.18
     Virtualization:      AMD-V
     L1d cache:           32K
     L1i cache:           32K
     L2 cache:            512K
     L3 cache:            32768K
     NUMA node0 CPU(s):   0-5,24-29
     NUMA node1 CPU(s):   6-11,30-35
     NUMA node2 CPU(s):   12-17,36-41
     NUMA node3 CPU(s):   18-23,42-47
     Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
     pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
     constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
     monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand
     lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
      cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase
      bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni
      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
      clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale
      vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif
      umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

  /proc/cpuinfo cache data
     cache size : 512 KB

  From numactl --hardware
  WARNING: a numactl 'node' might or might not correspond to a physical chip.
    available: 4 nodes (0-3)
    node 0 cpus: 0 1 2 3 4 5 24 25 26 27 28 29
    node 0 size: 64314 MB
    node 0 free: 64067 MB
    node 1 cpus: 6 7 8 9 10 11 30 31 32 33 34 35
    node 1 size: 64507 MB
    node 1 free: 64258 MB
    node 2 cpus: 12 13 14 15 16 17 36 37 38 39 40 41
    node 2 size: 64507 MB
    node 2 free: 64220 MB
    node 3 cpus: 18 19 20 21 22 23 42 43 44 45 46 47
    node 3 size: 64461 MB
    node 3 free: 64186 MB
    node distances:
    node   0   1   2   3
      0:  10  12  12  12
      1:  12  10  12  12
      2:  12  12  10  12
      3:  12  12  12  10

  From /proc/meminfo
     MemTotal:       263979220 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
     performance

  From /etc/*release* /etc/*version*
     os-release:
        NAME="SLES"
        VERSION="15-SP2"
        VERSION_ID="15.2"
        PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
```

**(Continued on next page)**

## Platform Notes (Continued)

```
       ID="sles"
       ID_LIKE="suse"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:15:sp2"

uname -a:
   Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aeba) x86_64
   x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                          Not affected
CVE-2018-3620 (L1 Terminal Fault):                       Not affected
Microarchitectural Data Sampling:                        Not affected
CVE-2017-5754 (Meltdown):                                Not affected
CVE-2018-3639 (Speculative Store Bypass):                Mitigation: Speculative Store
                                                         Bypass disabled via prctl and
                                                         seccomp
CVE-2017-5753 (Spectre variant 1):                       Mitigation: usercopy/swapgs
                                                         barriers and __user pointer
                                                         sanitization
CVE-2017-5715 (Spectre variant 2):                       Mitigation: Full AMD retpoline,
                                                       IBPB: conditional, IBRS_FW, STIBP:
                                                         always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort):                 Not affected

run-level 3 Sep 13 22:58

SPEC is set to: /home/cpu2017-1.1.8-amd-aocc300-milan-A1
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda3      xfs   892G   53G  839G   6% /

From /sys/devices/virtual/dmi/id
    Vendor:         Lenovo
    Product:        ThinkSystem SR635 -[7Y98XXXXXX]-
    Product Family: ThinkSystem
    Serial:         0123456789

Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
interpret this section. The 'dmidecode' program reads system data which is "intended to
allow hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    8x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200
    8x Unknown Unknown
```

**(Continued on next page)**

## Platform Notes (Continued)

```
 BIOS:
    BIOS Vendor:       Lenovo
    BIOS Version:      CFE125V
    BIOS Date:         06/23/2021
    BIOS Revision:     6.10

 (End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------
```


**(Continued on next page)**

## Compiler Version Notes (Continued)

```
==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

## Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5

**(Continued on next page)**

## Base Optimization Flags (Continued)

C benchmarks (continued):
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti

C++ benchmarks:
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -lamdlibm -ljemalloc
-lflang -lflangrti

Benchmarks using both Fortran and C:
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Kieee -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops

**(Continued on next page)**

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti

Benchmarks using both C and C++:
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti

Benchmarks using Fortran, C, and C++:
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Kieee -Mrecursive -mllvm -fuse-tile-inner-loop
-funroll-loops -mllvm -lsr-in-nested-loop -z muldefs -lamdlibm
-ljemalloc -lflang -lflangrti

## Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

**(Continued on next page)**

## Base Other Flags (Continued)

C++ benchmarks:
`-Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument`

Benchmarks using both C and C++:
`-Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument`

## Peak Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using both C and C++:
`clang++ clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

## Peak Portability Flags

`Same as Base Portability Flags`

# Peak Optimization Flags

C benchmarks:

519.lbm_r: `-m64 -flto -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3 -fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization -mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true -mllvm -function-specialize -mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc`

538.imagick_r: `Same as 519.lbm_r`

544.nab_r: `-m64 -flto -Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3 -fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization -mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true -mllvm -function-specialize -mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc`

C++ benchmarks:

508.namd_r: `basepeak = yes`

510.parest_r: `-m64 -std=c++98 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-suppress-fmas -Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3 -fveclib=AMDLIBM -finline-aggressive -mllvm -unroll-threshold=100 -flv-function-specialization -mllvm -enable-licm-vrp -mllvm -reroll-loops -mllvm -aggressive-loop-unswitch -mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc`

Fortran benchmarks:

503.bwaves_r: `-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching -Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast`

**(Continued on next page)**

## Peak Optimization Flags (Continued)

503.bwaves_r (continued):
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-lamdlibm -ljemalloc -lflang -lflangrti

549.fotonik3d_r: basepeak = yes

554.roms_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-Hz,1,0x1 -mllvm -fuse-tile-inner-loop -lamdlibm
-ljemalloc -lflang -lflangrti

Benchmarks using both Fortran and C:

521.wrf_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -Kieee -Mrecursive
-lamdlibm -ljemalloc -lflang -lflangrti

527.cam4_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-force-vector-interleave=1 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -O3 -ffast-math
-funroll-loops -mllvm -extra-vectorizer-passes
-mllvm -lsr-in-nested-loop -Mrecursive -lamdlibm

**(Continued on next page)**

## Peak Optimization Flags (Continued)

527.cam4_r (continued):
-ljemalloc -lflang -lflangrti

Benchmarks using both C and C++:
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -lamdlibm -ljemalloc

Benchmarks using Fortran, C, and C++:
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-finline-aggressive -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -convert-pow-exp-to-int=false -Kieee -Mrecursive -lamdlibm
-ljemalloc -lflang -lflangrti

## Peak Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

**(Continued on next page)**

# Peak Other Flags (Continued)

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument`

Benchmarks using both C and C++:
`-Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Milan1P-G.html`
`http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Milan1P-G.xml`
`http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml`


SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-09-13 13:28:39-0400.
Report generated on 2021-09-29 12:29:49 by CPU2017 PS formatter v6442.
Originally published on 2021-09-28.