SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-2049P-TN8R
(X11QPL, Intel Xeon Platinum 8276L)

SPECrate®2017_int_base = 657

SPECrate®2017_int_peak = Not Run

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2021
Hardware Availability: Apr-2019
Software Availability: Dec-2020

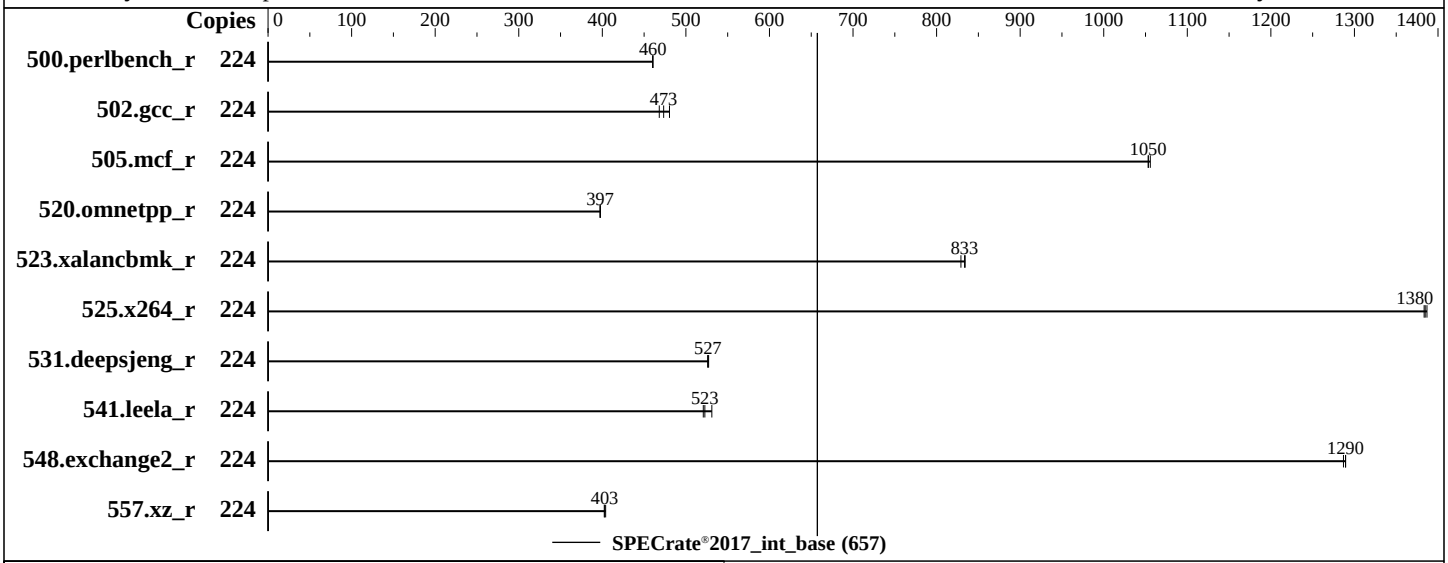

Hardware

CPU Name:	Intel Xeon Platinum 8276L
Max MHz:	4000
Nominal:	2200
Enabled:	112 cores, 4 chips, 2 threads/core
Orderable:	1,2,4 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	38.5 MB I+D on chip per chip
Other:	None
Memory:	768 GB (48 x 16 GB 1Rx4 PC4-2933Y-R)
Storage:	1.9 TB SATA SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux release 8.3 (Ootpa) 4.18.0-240.el8.x86_64
Compiler:	C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux; Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;
Parallel:	No
Firmware:	version 3.3 released Feb-2020
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None
Power Management:	BIOS set to Super performance at the cost of additional power usage

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-2049P-TN8R
(X11QPL, Intel Xeon Platinum 8276L)

SPECrate®2017_int_base = 657

SPECrate®2017_int_peak = Not Run

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2021
Hardware Availability: Apr-2019
Software Availability: Dec-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	224	775	460	**775**	**460**	774	461							
502.gcc_r	224	660	480	**670**	**473**	678	468							
505.mcf_r	224	**344**	**1050**	343	1060	344	1050							
520.omnetpp_r	224	**739**	**397**	740	397	739	398							
523.xalancbmk_r	224	285	829	284	834	**284**	**833**							
525.x264_r	224	**283**	**1380**	284	1380	283	1390							
531.deepsjeng_r	224	488	526	487	527	**488**	**527**							
541.leela_r	224	699	531	712	521	**710**	**523**							
548.exchange2_r	224	456	1290	455	1290	**455**	**1290**							
557.xz_r	224	599	404	601	402	**601**	**403**							

SPECrate®2017_int_base = 657

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/lib/intel64:/home/lib/ia32:/home/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Red Hat Enterprise Linux 8.3
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

(Continued on next page)

General Notes (Continued)

```
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
```

Platform Notes

```
BIOS Settings:
Intel Virtualization Technology = Disable
Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Maximum Performance
Super Performance Mode = Enable
SNC = Enable
Stale Atos = Disable
IMC Interleaving = 1-way Interleave
Patrol Scrub = Disable
Intel Run Sure = Disable

 Sysinfo program /home/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on localhost.localdomain Thu Oct  7 14:16:58 2021

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8276L CPU @ 2.20GHz
       4  "physical id"s (chips)
       224 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 28
       siblings  : 56
       physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
```

(Continued on next page)

Platform Notes (Continued)

```
From lscpu from util-linux 2.32.1:
     Architecture:        x86_64
     CPU op-mode(s):      32-bit, 64-bit
     Byte Order:          Little Endian
     CPU(s):              224
     On-line CPU(s) list: 0-223
     Thread(s) per core:  2
     Core(s) per socket:  28
     Socket(s):           4
     NUMA node(s):        8
     Vendor ID:           GenuineIntel
     CPU family:          6
     Model:               85
     Model name:          Intel(R) Xeon(R) Platinum 8276L CPU @ 2.20GHz
     Stepping:            6
     CPU MHz:             2896.149
     CPU max MHz:         4000.0000
     CPU min MHz:         1000.0000
     BogoMIPS:            4400.00
     Virtualization:      VT-x
     L1d cache:           32K
     L1i cache:           32K
     L2 cache:            1024K
     L3 cache:            39424K
     NUMA node0 CPU(s):   0-3,7-9,14-17,21-23,112-115,119-121,126-129,133-135
     NUMA node1 CPU(s):   4-6,10-13,18-20,24-27,116-118,122-125,130-132,136-139
     NUMA node2 CPU(s):   28-31,35-37,42-45,49-51,140-143,147-149,154-157,161-163
     NUMA node3 CPU(s):   32-34,38-41,46-48,52-55,144-146,150-153,158-160,164-167
     NUMA node4 CPU(s):   56-59,63-65,70-73,77-79,168-171,175-177,182-185,189-191
     NUMA node5 CPU(s):   60-62,66-69,74-76,80-83,172-174,178-181,186-188,192-195
     NUMA node6 CPU(s):   84-87,91-93,98-101,105-107,196-199,203-205,210-213,217-219
     NUMA node7 CPU(s):   88-90,94-97,102-104,108-111,200-202,206-209,214-216,220-223
     Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
     pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
     lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
     aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
     xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
     avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
     invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust
     bmi1 hle avx2 smep bmi2 erms invpcid cqm mpx rdt_a avx512f avx512dq rdseed adx smap
     clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
     cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke
     avx512_vnni md_clear flush_l1d arch_capabilities

/proc/cpuinfo cache data
   cache size : 39424 KB
```

(Continued on next page)

Platform Notes (Continued)

```
From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 112 113 114 115 119 120 121 126 127 128
  129 133 134 135
  node 0 size: 91887 MB
  node 0 free: 94822 MB
  node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 116 117 118 122 123 124 125 130 131
  132 136 137 138 139
  node 1 size: 94045 MB
  node 1 free: 96514 MB
  node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 140 141 142 143 147 148 149 154
  155 156 157 161 162 163
  node 2 size: 94103 MB
  node 2 free: 96488 MB
  node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 144 145 146 150 151 152 153 158
  159 160 164 165 166 167
  node 3 size: 94227 MB
  node 3 free: 96329 MB
  node 4 cpus: 56 57 58 59 63 64 65 70 71 72 73 77 78 79 168 169 170 171 175 176 177 182
  183 184 185 189 190 191
  node 4 size: 94279 MB
  node 4 free: 96490 MB
  node 5 cpus: 60 61 62 66 67 68 69 74 75 76 80 81 82 83 172 173 174 178 179 180 181 186
  187 188 192 193 194 195
  node 5 size: 94321 MB
  node 5 free: 96489 MB
  node 6 cpus: 84 85 86 87 91 92 93 98 99 100 101 105 106 107 196 197 198 199 203 204 205
  210 211 212 213 217 218 219
  node 6 size: 94201 MB
  node 6 free: 96447 MB
  node 7 cpus: 88 89 90 94 95 96 97 102 103 104 108 109 110 111 200 201 202 206 207 208
  209 214 215 216 220 221 222 223
  node 7 size: 94442 MB
  node 7 free: 96459 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  11  21  21  21  21  21  21
    1:  11  10  21  21  21  21  21  21
    2:  21  21  10  11  21  21  21  21
    3:  21  21  11  10  21  21  21  21
    4:  21  21  21  21  10  11  21  21
    5:  21  21  21  21  11  10  21  21
    6:  21  21  21  21  21  21  10  11
    7:  21  21  21  21  21  21  11  10

From /proc/meminfo
```

(Continued on next page)

Platform Notes (Continued)

```
    MemTotal:       790905996 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

  /sbin/tuned-adm active
      Current active profile: throughput-performance

  /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
     performance

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux"
        VERSION="8.3 (Ootpa)"
        ID="rhel"
        ID_LIKE="fedora"
        VERSION_ID="8.3"
        PLATFORM_ID="platform:el8"
        PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
        ANSI_COLOR="0;31"
     redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
     system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

  uname -a:
     Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
     x86_64 x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2018-12207 (iTLB Multihit):                          KVM: Mitigation: Split huge pages
  CVE-2018-3620 (L1 Terminal Fault):                         Not affected
  Microarchitectural Data Sampling:                          Not affected
  CVE-2017-5754 (Meltdown):                                  Not affected
  CVE-2018-3639 (Speculative Store Bypass):                  Mitigation: Speculative Store
                                                             Bypass disabled via prctl and
                                                             seccomp
  CVE-2017-5753 (Spectre variant 1):                         Mitigation: usercopy/swapgs
                                                             barriers and __user pointer
                                                             sanitization
  CVE-2017-5715 (Spectre variant 2):                        Mitigation: Enhanced IBRS, IBPB:
                                                             conditional, RSB filling
  CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
  CVE-2019-11135 (TSX Asynchronous Abort):                   Mitigation: TSX disabled

  run-level 3 Oct 7 14:16
```

(Continued on next page)

Platform Notes (Continued)

```
 SPEC is set to: /home
    Filesystem            Type  Size  Used Avail Use% Mounted on
    /dev/mapper/rhel-home xfs   1.7T  174G  1.6T  11% /home

 From /sys/devices/virtual/dmi/id
     Vendor:         Supermicro
     Product:        X11QPL
     Product Family: SMC X11
     Serial:         123456789

 Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
 interpret this section. The 'dmidecode' program reads system data which is "intended to
 allow hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     48x Samsung M393A2K40DB2-CVF 16 GB 1 rank 2933, configured at 2934

 BIOS:
    BIOS Vendor:       American Megatrends Inc.
    BIOS Version:      3.3
    BIOS Date:         02/24/2020
    BIOS Revision:     5.14

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
        | 525.x264_r(base) 557.xz_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
        | 541.leela_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Fortran | 548.exchange2_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revI.2021-10-28.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revI.2021-10-28.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-10-07 14:16:57-0400.
Report generated on 2021-10-28 11:34:40 by CPU2017 PS formatter v6442.
Originally published on 2021-10-26.