# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## New H3C Technologies Co., Ltd.

H3C UniServer R5500 G5
(2.80 GHz, AMD EPYC 7543)

SPECspeed®2017_int_base = 12.8

SPECspeed®2017_int_peak = 12.8

**CPU2017 License:** 9066
**Test Sponsor:** New H3C Technologies Co., Ltd.
**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Oct-2021
**Hardware Availability:** Sep-2021
**Software Availability:** Mar-2021

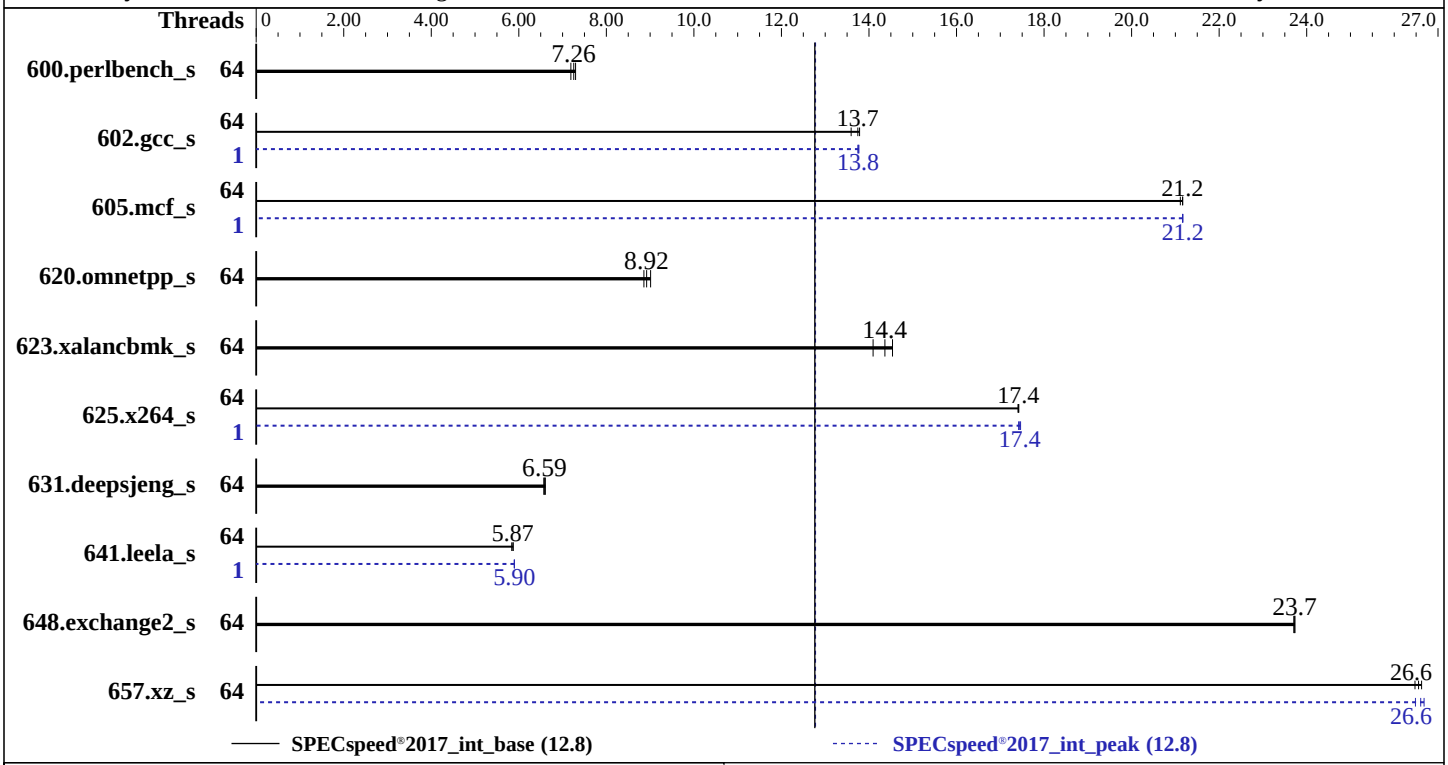


## Hardware

| | |
|---|---|
| CPU Name: | AMD EPYC 7543 |
| Max MHz: | 3700 |
| Nominal: | 2800 |
| Enabled: | 64 cores, 2 chips |
| Orderable: | 1,2 chips |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 512 KB I+D on chip per core |
| L3: | 256 MB I+D on chip per chip, 32 MB shared / 4 cores |
| Other: | None |
| Memory: | 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R) |
| Storage: | 1 x 1.92 TB SSD SATA |
| Other: | None |

## Software

| | |
|---|---|
| OS: | Red Hat Enterprise Linux release 8.3 (Ootpa) kernel version 4.18.0-240.el8.x86_64 |
| Compiler: | C/C++/Fortran: Version 3.0.0 of AOCC |
| Parallel: | Yes |
| Firmware: | Version 5.10 released Sep-2021 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | jemalloc: jemalloc memory allocator library v5.1.0 |
| Power Management: | BIOS and OS set to prefer performance at the cost of additional power usage |

# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## New H3C Technologies Co., Ltd.

H3C UniServer R5500 G5
(2.80 GHz, AMD EPYC 7543)

SPECspeed®2017_int_base = 12.8

SPECspeed®2017_int_peak = 12.8

**CPU2017 License:** 9066
**Test Sponsor:** New H3C Technologies Co., Ltd.
**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Oct-2021
**Hardware Availability:** Sep-2021
**Software Availability:** Mar-2021

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 600.perlbench_s | 64 | 243 | 7.30 | 247 | 7.19 | **245** | **7.26** | 64 | 243 | 7.30 | 247 | 7.19 | **245** | **7.26** |
| 602.gcc_s | 64 | 289 | 13.8 | **290** | **13.7** | 293 | 13.6 | 1 | **289** | **13.8** | 290 | 13.7 | 289 | 13.8 |
| 605.mcf_s | 64 | 223 | 21.2 | 224 | 21.1 | **223** | **21.2** | 1 | 223 | 21.2 | **223** | **21.2** | 223 | 21.2 |
| 620.omnetpp_s | 64 | 181 | 9.01 | **183** | **8.92** | 184 | 8.86 | 64 | 181 | 9.01 | **183** | **8.92** | 184 | 8.86 |
| 623.xalancbmk_s | 64 | 97.5 | 14.5 | 101 | 14.1 | **98.7** | **14.4** | 64 | 97.5 | 14.5 | 101 | 14.1 | **98.7** | **14.4** |
| 625.x264_s | 64 | 101 | 17.4 | 101 | 17.4 | **101** | **17.4** | 1 | 101 | 17.5 | 101 | 17.4 | **101** | **17.4** |
| 631.deepsjeng_s | 64 | 217 | 6.61 | 218 | 6.57 | **217** | **6.59** | 64 | 217 | 6.61 | 218 | 6.57 | **217** | **6.59** |
| 641.leela_s | 64 | **291** | **5.87** | 291 | 5.87 | 292 | 5.84 | 1 | 289 | 5.90 | 289 | 5.90 | **289** | **5.90** |
| 648.exchange2_s | 64 | 124 | 23.7 | 124 | 23.7 | **124** | **23.7** | 64 | 124 | 23.7 | 124 | 23.7 | **124** | **23.7** |
| 657.xz_s | 64 | 234 | 26.5 | 232 | 26.6 | **233** | **26.6** | 64 | 232 | 26.7 | **232** | **26.6** | 233 | 26.5 |

**SPECspeed®2017_int_base =** **12.8**

**SPECspeed®2017_int_peak =** **12.8**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

## Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

## Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
```

**(Continued on next page)**

## Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-63"
LD_LIBRARY_PATH =
     "/home/speccpu2017/amd_speed_aocc300_milan_B_lib/lib;/home/speccpu2017/a
     md_speed_aocc300_milan_B_lib/lib32:"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "64"

Environment variables set by runcpu during the 602.gcc_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 625.x264_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 641.leela_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz_s peak run:
GOMP_CPU_AFFINITY = "0-63"
```

## General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
```

**(Continued on next page)**

## General Notes (Continued)

```
https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2
```

## Platform Notes

```
BIOS Configuration
 SMT Control set to Disabled
 DLWM Support set to Disabled
 Determinism Slider set to Power
 NUMA nodes per socket set to NPS2
 APBDIS set to 1
 Fix Soc P-States set to P0

 Sysinfo program /home/speccpu2017/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on localhost.localdomain Wed Oct 13 22:47:21 2021

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD EPYC 7543 32-Core Processor
       2  "physical id"s (chips)
       64 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 32
       siblings  : 32
       physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31
       physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31

 From lscpu from util-linux 2.32.1:
      Architecture:        x86_64
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
      CPU(s):              64
      On-line CPU(s) list: 0-63
      Thread(s) per core:  1
      Core(s) per socket:  32
      Socket(s):           2
      NUMA node(s):        4
      Vendor ID:           AuthenticAMD
      CPU family:          25
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      Model:                1
      Model name:           AMD EPYC 7543 32-Core Processor
      Stepping:             1
      CPU MHz:              2694.244
      CPU max MHz:          2800.0000
      CPU min MHz:          1500.0000
      BogoMIPS:             5589.79
      Virtualization:       AMD-V
      L1d cache:            32K
      L1i cache:            32K
      L2 cache:             512K
      L3 cache:             32768K
      NUMA node0 CPU(s):    0-15
      NUMA node1 CPU(s):    16-31
      NUMA node2 CPU(s):    32-47
      NUMA node3 CPU(s):    48-63
      Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
      constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
      monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand
      lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw
      ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
      cat_l3 cdp_l3 invpcid_single hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall
      fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap clflushopt clwb
      sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
      cqm_mbm_local clzero irperf xsaveerptr wbnoinvd amd_ppin arat npt lbrv svm_lock
      nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
      v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

  /proc/cpuinfo cache data
     cache size : 512 KB

  From numactl --hardware
  WARNING: a numactl 'node' might or might not correspond to a physical chip.
    available: 4 nodes (0-3)
    node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
    node 0 size: 128529 MB
    node 0 free: 128121 MB
    node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31
    node 1 size: 128988 MB
    node 1 free: 128392 MB
    node 2 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47
    node 2 size: 128984 MB
    node 2 free: 128820 MB
    node 3 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63
    node 3 size: 128954 MB
    node 3 free: 128800 MB
```


**(Continued on next page)**

## Platform Notes (Continued)

```
  node distances:
  node   0   1   2   3
    0:  10  12  32  32
    1:  12  10  32  32
    2:  32  32  10  12
    3:  32  32  12  10

From /proc/meminfo
   MemTotal:       527935752 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/sbin/tuned-adm active
    Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
   performance

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux"
      VERSION="8.3 (Ootpa)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="8.3"
      PLATFORM_ID="platform:el8"
      PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
      ANSI_COLOR="0;31"
   redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
   system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

uname -a:
   Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                    Not affected
CVE-2018-3620 (L1 Terminal Fault):                 Not affected
Microarchitectural Data Sampling:                  Not affected
CVE-2017-5754 (Meltdown):                          Not affected
CVE-2018-3639 (Speculative Store Bypass):          Mitigation: Speculative Store
                                                   Bypass disabled via prctl and
                                                   seccomp
CVE-2017-5753 (Spectre variant 1):                 Mitigation: usercopy/swapgs
                                                   barriers and __user pointer
```

(Continued on next page)

## Platform Notes (Continued)

```
                                                        sanitization
 CVE-2017-5715 (Spectre variant 2):                      Mitigation: Full AMD retpoline,
                                                       IBPB: conditional, IBRS_FW, STIBP:
                                                        disabled, RSB filling
 CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
 CVE-2019-11135 (TSX Asynchronous Abort):               Not affected

 run-level 3 Oct 13 22:47 last=5

 SPEC is set to: /home/speccpu2017
    Filesystem            Type  Size  Used Avail Use% Mounted on
    /dev/mapper/rhel-home xfs   1.7T   25G  1.7T   2% /home

 From /sys/devices/virtual/dmi/id
     Vendor:         New H3C Technologies Co., Ltd.
     Product:        R5500 G5
     Product Family: Rack
     Serial:         210235A2R6000000123

 Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
 interpret this section. The 'dmidecode' program reads system data which is "intended to
 allow hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     16x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200
     16x Unknown Unknown

 BIOS:
    BIOS Vendor:       American Megatrends International, LLC.
    BIOS Version:      5.10
    BIOS Date:         09/08/2021
    BIOS Revision:     5.22

 (End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
C       | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
        | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------

==============================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)
        | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 648.exchange2_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

## Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64

**(Continued on next page)**

## Base Portability Flags (Continued)

641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-m64 -mno-adx -mno-sse4a -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti

C++ benchmarks:
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
-lflangrti

Fortran benchmarks:
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -z muldefs

**(Continued on next page)**

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
-lflangrti

## Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument -Wno-return-type

C++ benchmarks:
-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:
-Wno-return-type

## Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

600.perlbench_s: basepeak = yes


**(Continued on next page)**

## Peak Optimization Flags (Continued)

602.gcc_s: `-m64 -mno-adx -mno-sse4a -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3 -fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5 -mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization -mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true -mllvm -function-specialize -mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang`

605.mcf_s: `Same as 602.gcc_s`

625.x264_s: `Same as 602.gcc_s`

657.xz_s: `Same as 602.gcc_s`

C++ benchmarks:

620.omnetpp_s: `basepeak = yes`

623.xalancbmk_s: `basepeak = yes`

631.deepsjeng_s: `basepeak = yes`

641.leela_s: `-m64 -std=c++98 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-do-block-reorder=aggressive -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3 -fveclib=AMDLIBM -ffast-math -flto -finline-aggressive -mllvm -unroll-threshold=100 -flv-function-specialization -mllvm -enable-licm-vrp -mllvm -reroll-loops -mllvm -aggressive-loop-unswitch -mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp=true -mllvm -do-block-reorder=aggressive -fvirtual-function-elimination -fvisibility=hidden -DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang`

Fortran benchmarks:

**(Continued on next page)**

## Peak Optimization Flags (Continued)

648.exchange2_s: `basepeak = yes`

## Peak Other Flags

C benchmarks:
`-Wno-unused-command-line-argument -Wno-return-type`

C++ benchmarks:
`-Wno-unused-command-line-argument -Wno-return-type`

Fortran benchmarks:
`-Wno-return-type`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc300-flags-B2.html`
`http://www.spec.org/cpu2017/flags/New_H3C-Platform-AMD-Settings-V1.0-Milan-revB.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc300-flags-B2.xml`
`http://www.spec.org/cpu2017/flags/New_H3C-Platform-AMD-Settings-V1.0-Milan-revB.xml`


SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.



Tested with SPEC CPU®2017 v1.1.8 on 2021-10-13 22:47:20-0400.
Report generated on 2021-11-10 10:07:21 by CPU2017 PS formatter v6442.
Originally published on 2021-11-09.