SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10 Plus
(2.40 GHz, Intel Xeon Gold 6336Y)

SPECrate®2017_fp_base = 339

SPECrate®2017_fp_peak = 353

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Dec-2021
Hardware Availability: Nov-2021
Software Availability: Dec-2020

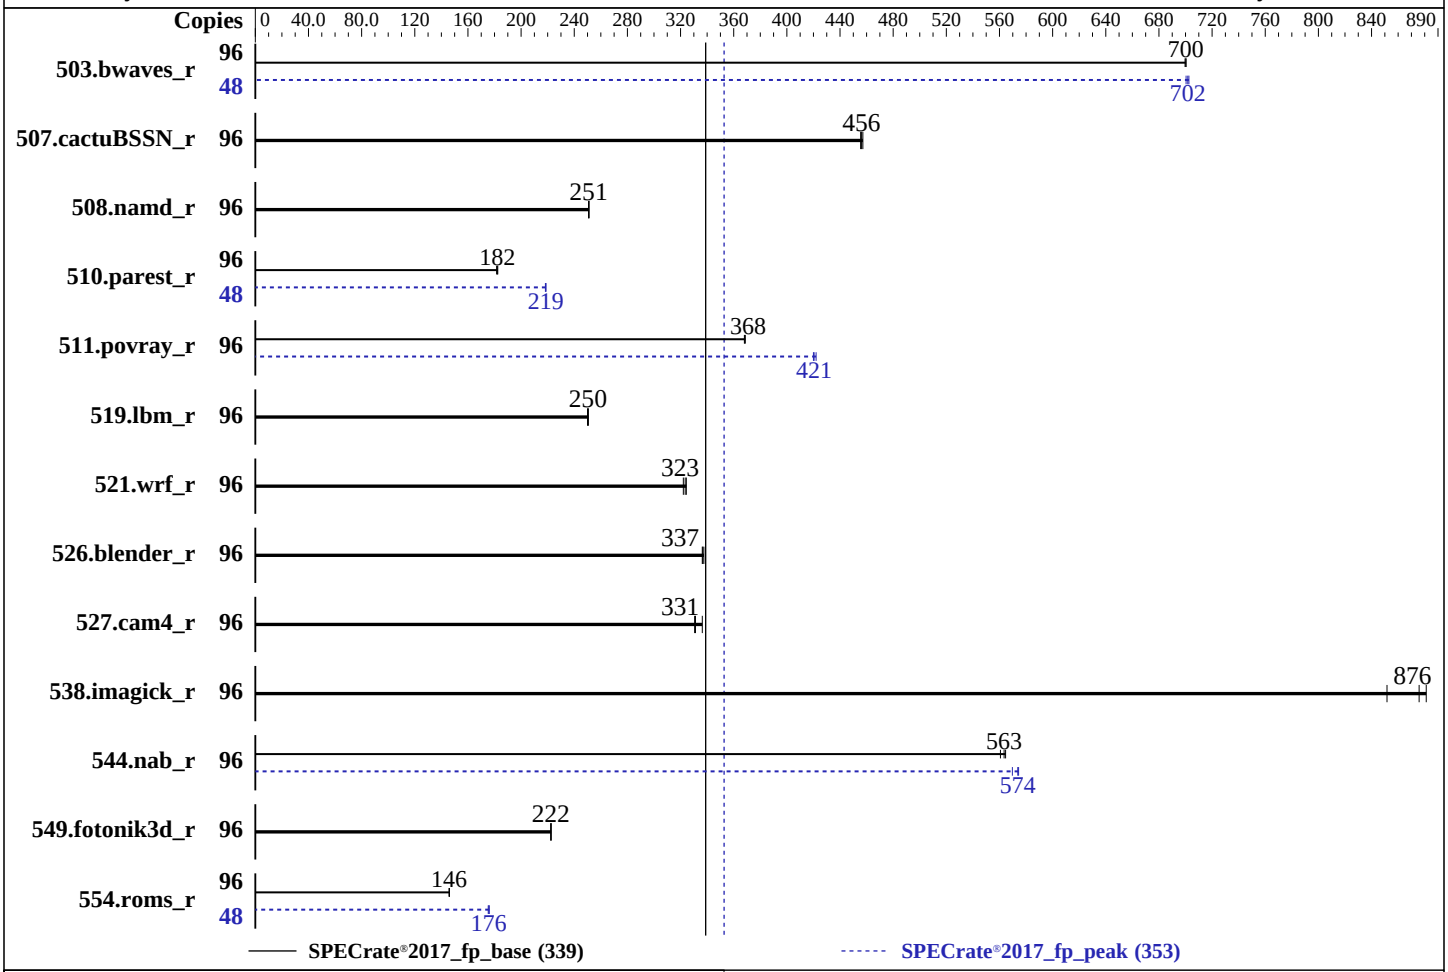

Hardware

CPU Name:	Intel Xeon Gold 6336Y
Max MHz:	3600
Nominal:	2400
Enabled:	48 cores, 2 chips, 2 threads/core
Orderable:	1, 2 chip(s)
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1.25 MB I+D on chip per core
L3:	36 MB I+D on chip per chip
Other:	None
Memory:	2 TB (32 x 64 GB 2Rx4 PC4-3200AA-R)
Storage:	1 x 800 GB SAS SSD, RAID 0
Other:	None

Software

OS:	Red Hat Enterprise Linux 8.3 (Ootpa) Kernel 4.18.0-240.el8.x86_64
Compiler:	C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux; Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux; C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux
Parallel:	No
Firmware:	HPE BIOS Version I44 v1.54 11/03/2021 released Nov-2021
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1

(Continued on next page)

Software (Continued)

Power Management: BIOS and OS set to prefer performance at the cost of additional power usage

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	1376	700	**1375**	**700**	1375	700	48	685	703	687	700	**686**	**702**
507.cactuBSSN_r	96	266	457	**266**	**456**	267	456	96	266	457	**266**	**456**	267	456
508.namd_r	96	363	251	**364**	**251**	364	251	96	363	251	**364**	**251**	364	251
510.parest_r	96	1376	182	**1379**	**182**	1383	182	48	574	219	575	218	**574**	**219**
511.povray_r	96	**609**	**368**	608	369	609	368	96	**533**	**421**	534	420	531	422
519.lbm_r	96	405	250	404	251	**404**	**250**	96	405	250	404	251	**404**	**250**
521.wrf_r	96	668	322	**665**	**323**	663	324	96	668	322	**665**	**323**	663	324
526.blender_r	96	435	336	433	338	**434**	**337**	96	435	336	433	338	**434**	**337**
527.cam4_r	96	508	331	499	336	**507**	**331**	96	508	331	499	336	**507**	**331**
538.imagick_r	96	280	852	**273**	**876**	271	881	96	280	852	**273**	**876**	271	881
544.nab_r	96	**287**	**563**	288	561	286	565	96	284	570	281	574	**282**	**574**
549.fotonik3d_r	96	**1682**	**222**	1681	223	1683	222	96	**1682**	**222**	1681	223	1683	222
554.roms_r	96	1046	146	**1045**	**146**	1045	146	48	435	175	**434**	**176**	433	176

SPECrate®2017_fp_base = 339

SPECrate®2017_fp_peak = 353

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3 >       /proc/sys/vm/drop_caches
Tuned-adm profile was set to throughput-performance using "tuned-adm profile throughput-performance"
Cpupower Frequency was set to performance using "cpupower frequency-set -g performance"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
```

(Continued on next page)

Environment Variables Notes (Continued)

```
MALLOC_CONF = "retain:true"
```

General Notes

```
 Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
 memory using Red Hat Enterprise Linux 8.1
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

Submitted_by: "Bucek, James" <james.bucek@hpe.com>
Submitted: Wed Jan 12 10:02:51 EST 2022
Submission: cpu2017-20220103-30713.sub
```

Platform Notes

```
  BIOS Configuration:
  Workload Profile set to General Throughput Compute
  Memory Patrol Scrubbing set to Disabled
  Advanced Memory Protection set to Advanced ECC
  Last Level Cache (LLC) Prefetch set to Enabled
  Last Level Cache (LLC) Dead Line Allocation set to Disabled
  Enhanced Processor Performance set to Enabled
  Thermal Configuration set to Maximum Cooling
  Workload Profile set to Custom
    DCU Stream Prefetcher set to Disabled
    XPT Remote Prefetcher set to Enabled
    Energy/Performance Bias set to Balanced Performance

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on localhost.localdomain Sat Dec 25 08:12:50 2021

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo
```

(Continued on next page)

Platform Notes (Continued)

```
From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Gold 6336Y CPU @ 2.40GHz
      2  "physical id"s (chips)
      96 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 24
      siblings  : 48
      physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23
      physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23

From lscpu from util-linux 2.32.1:
     Architecture:        x86_64
     CPU op-mode(s):      32-bit, 64-bit
     Byte Order:          Little Endian
     CPU(s):              96
     On-line CPU(s) list: 0-95
     Thread(s) per core:  2
     Core(s) per socket:  24
     Socket(s):           2
     NUMA node(s):        2
     Vendor ID:           GenuineIntel
     CPU family:          6
     Model:               106
     Model name:          Intel(R) Xeon(R) Gold 6336Y CPU @ 2.40GHz
     Stepping:            6
     CPU MHz:             1701.392
     CPU max MHz:         3600.0000
     CPU min MHz:         800.0000
     BogoMIPS:            4800.00
     Virtualization:      VT-x
     L1d cache:           48K
     L1i cache:           32K
     L2 cache:            1280K
     L3 cache:            36864K
     NUMA node0 CPU(s):   0-23,48-71
     NUMA node1 CPU(s):   24-47,72-95
     Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
     pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
     lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
     aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
     xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
     avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd
     mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad
     fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
     rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
     avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
```

(Continued on next page)

Platform Notes (Continued)

```
      cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts hwp hwp_act_window
      hwp_pkg_req avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
      avx512_bitalg tme avx512_vpopcntdq la57 rdpid md_clear pconfig flush_l1d
      arch_capabilities

 /proc/cpuinfo cache data
    cache size : 36864 KB

 From numactl --hardware
 WARNING: a numactl 'node' might or might not correspond to a physical chip.
   available: 2 nodes (0-1)
   node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 48 49 50 51
   52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71
   node 0 size: 968216 MB
   node 0 free: 1030746 MB
   node 1 cpus: 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 72
   73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95
   node 1 size: 970523 MB
   node 1 free: 1031500 MB
   node distances:
   node   0   1
     0:  10  20
     1:  20  10

 From /proc/meminfo
    MemTotal:       2113481464 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /sbin/tuned-adm active
     Current active profile: throughput-performance

 /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
    performance

 From /etc/*release* /etc/*version*
    os-release:
       NAME="Red Hat Enterprise Linux"
       VERSION="8.3 (Ootpa)"
       ID="rhel"
       ID_LIKE="fedora"
       VERSION_ID="8.3"
       PLATFORM_ID="platform:el8"
       PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
       ANSI_COLOR="0;31"
    redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
    system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
```

(Continued on next page)

Platform Notes (Continued)

```
    system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

  uname -a:
    Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
    x86_64 x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2018-12207 (iTLB Multihit):                          Not affected
  CVE-2018-3620 (L1 Terminal Fault):                       Not affected
  Microarchitectural Data Sampling:                        Not affected
  CVE-2017-5754 (Meltdown):                                Not affected
  CVE-2018-3639 (Speculative Store Bypass):                Mitigation: Speculative Store
                                                           Bypass disabled via prctl and
                                                           seccomp
  CVE-2017-5753 (Spectre variant 1):                       Mitigation: usercopy/swapgs
                                                           barriers and __user pointer
                                                           sanitization
  CVE-2017-5715 (Spectre variant 2):                      Mitigation: Enhanced IBRS, IBPB:
                                                           conditional, RSB filling
  CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
  CVE-2019-11135 (TSX Asynchronous Abort):                 Not affected

  run-level 3 Dec 25 08:09

  SPEC is set to: /home/cpu2017
     Filesystem            Type  Size  Used Avail Use% Mounted on
     /dev/mapper/rhel-home xfs   670G  112G  558G  17% /home

  From /sys/devices/virtual/dmi/id
      Vendor:          HPE
      Product:         Synergy 480 Gen10 Plus
      Product Family: Synergy
      Serial:          CN70330Q5F

  Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
  interpret this section. The 'dmidecode' program reads system data which is "intended to
  allow hardware to be accurately determined", but the intent may not be met, as there are
  frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
    Memory:
      32x Micron 36ASF8G72PZ-3G2B2 64 GB 2 rank 3200

  BIOS:
     BIOS Vendor:       HPE
     BIOS Version:      I44
     BIOS Date:         11/03/2021
     BIOS Revision:     1.54
```

(Continued on next page)

Platform Notes (Continued)

```
    Firmware Revision: 2.50

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
C++, C          | 511.povray_r(peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`ifort icx`

Benchmarks using both C and C++:
`icpx icx`

Benchmarks using Fortran, C, and C++:
`icpx icx ifort`

Base Portability Flags

503.bwaves_r: `-DSPEC_LP64`
507.cactuBSSN_r: `-DSPEC_LP64`
508.namd_r: `-DSPEC_LP64`
510.parest_r: `-DSPEC_LP64`
511.povray_r: `-DSPEC_LP64`
519.lbm_r: `-DSPEC_LP64`
521.wrf_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian`
526.blender_r: `-DSPEC_LP64 -DSPEC_LINUX -funsigned-char`
527.cam4_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG`
538.imagick_r: `-DSPEC_LP64`
544.nab_r: `-DSPEC_LP64`
549.fotonik3d_r: `-DSPEC_LP64`
554.roms_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:
```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:
```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:
```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:
```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:
```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icx

Benchmarks using both C and C++:

511.povray_r: icpc icc

526.blender_r: icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto
-Ofast -qopt-mem-layout-trans=4
-fimf-accuracy-bits=14:sqrt
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

(Continued on next page)

Peak Optimization Flags (Continued)

508.namd_r: basepeak = yes

510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

549.fotonik3d_r: basepeak = yes

554.roms_r: Same as 503.bwaves_r

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.0-ICX-revG.html

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml`
`http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.0-ICX-revG.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-12-24 21:42:50-0500.
Report generated on 2022-01-18 18:58:43 by CPU2017 PS formatter v6442.
Originally published on 2022-01-18.