SPEC CPU®2017 Integer Rate Result

Cisco Systems

Cisco UCS X210c M6 (Intel Xeon Platinum 8360Y, 2.40GHz)

SPECrate®2017_int_base = 498

SPECrate®2017_int_peak = Not Run

CPU2017 License:	9019	**Test Date:**	Jan-2022
Test Sponsor:	Cisco Systems	**Hardware Availability:**	Sep-2021
Tested by:	Cisco Systems	**Software Availability:**	Sep-2021

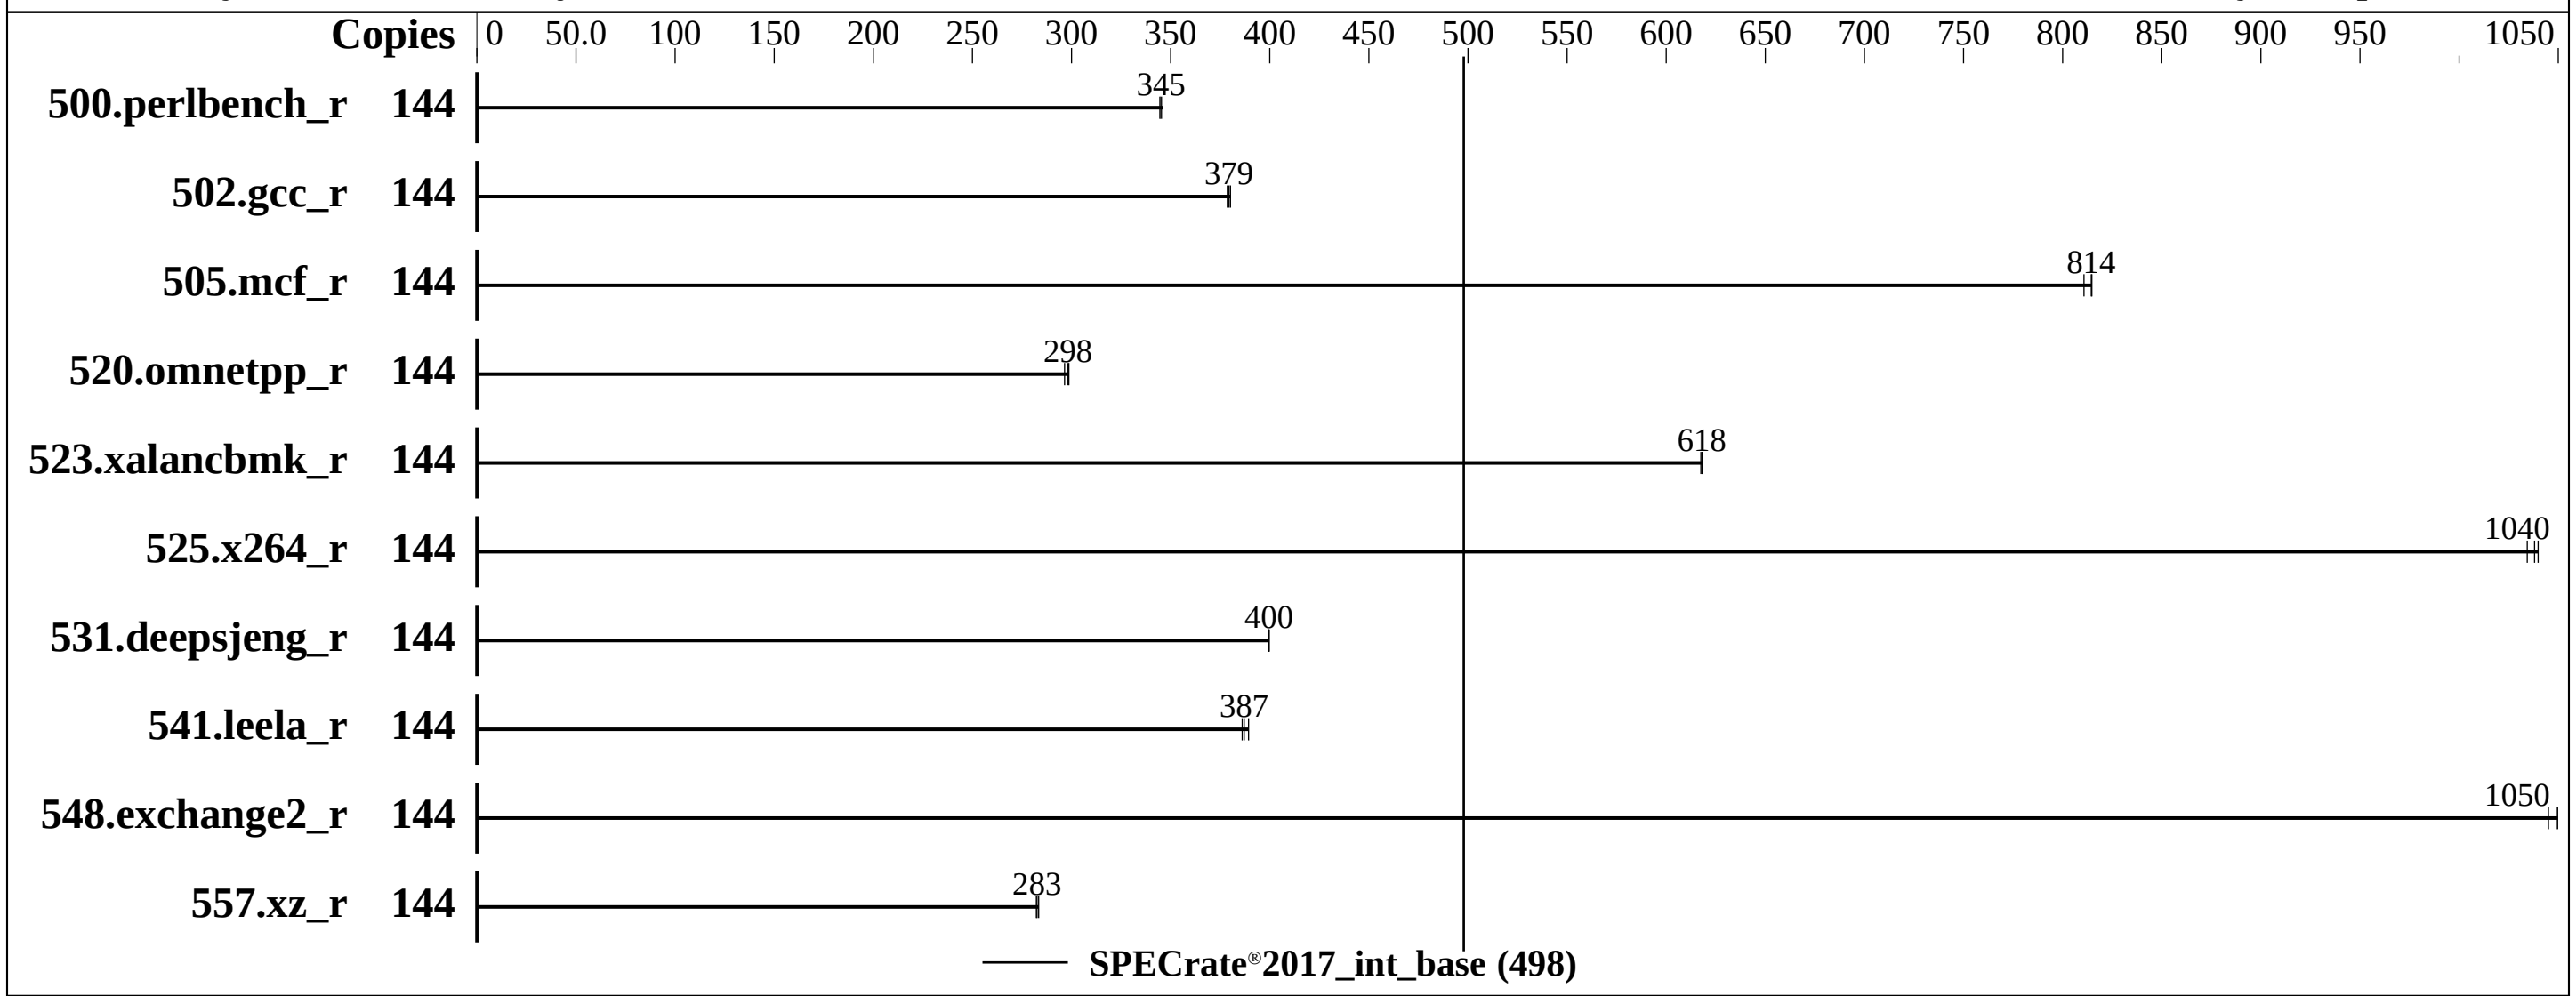

Hardware

CPU Name:	Intel Xeon Platinum 8360Y
Max MHz:	3500
Nominal:	2400
Enabled:	72 cores, 2 chips, 2 threads/core
Orderable:	1,2 Chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1.25 MB I+D on chip per core
L3:	54 MB I+D on chip per chip
Other:	None
Memory:	2 TB (32 x 64 GB 2Rx4 PC4-3200AA-R)
Storage:	1 x 240 GB M.2 SSD SATA
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP3 5.3.18-57-default
Compiler:	C/C++: Version 2021.4.0 of Intel oneAPI DPC++/C++ Compiler Build 20210924 for Linux; Fortran: Version 2021.4.0 of Intel Fortran Compiler Classic Build 20210910 for Linux;
Parallel:	No
Firmware:	Version 5.0.1d released Aug-2021
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None
Power Management:	OS set to prefer performance at the cost of additional power usage

Cisco Systems

Cisco UCS X210c M6 (Intel Xeon Platinum 8360Y, 2.40GHz)

SPECrate®2017_int_base = 498

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems
Test Date: Jan-2022
Hardware Availability: Sep-2021
Software Availability: Sep-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	144	**664**	**345**	662	346	665	345							
502.gcc_r	144	536	380	539	379	**537**	**379**							
505.mcf_r	144	286	815	287	811	**286**	**814**							
520.omnetpp_r	144	637	296	**634**	**298**	633	299							
523.xalancbmk_r	144	246	618	**246**	**618**	246	617							
525.x264_r	144	244	1030	**243**	**1040**	242	1040							
531.deepsjeng_r	144	413	400	413	400	**413**	**400**							
541.leela_r	144	**616**	**387**	613	389	618	386							
548.exchange2_r	144	361	1050	**360**	**1050**	359	1050							
557.xz_r	144	551	282	549	283	**550**	**283**							

SPECrate®2017_int_base = 498

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/intel/tbb/2021.4.0/env/../lib/intel64/gcc4.8:/home/intel/mpi/2021
     .4.0//libfabric/lib:/home/intel/mpi/2021.4.0//lib/release:/home/intel/mp
     i/2021.4.0//lib:/home/intel/compiler/2021.4.0/linux/compiler/lib/intel64
     _lin:/home/intel/compiler/2021.4.0/linux/lib:/home/intel/clck/2021.4.0/l
     ib/intel64:/home/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7940X CPU + 64GB RAM
memory using openSUSE Leap 15.2
Transparent Huge Pages enabled by default
```

(Continued on next page)

General Notes (Continued)

```
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Settings:
Adjacent Cache Line Prefetcher set to Disabled
DCU Streamer Prefetch set to Disabled
Sub NUMA Clustering set to Enabled
LLC Dead Line set to Disabled
Memory Refresh Rate set to 1x Refresh
ADDDC Sparing set to Disabled
Patrol Scrub set to Disabled
Processor C6 Report set to Enabled

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on perf-blade1 Wed Jan 26 21:35:22 2022

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8360Y CPU @ 2.40GHz
       2  "physical id"s (chips)
       144 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 36
       siblings  : 72
       physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31 32 33 34 35
       physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31 32 33 34 35

 From lscpu from util-linux 2.36.2:
```

(Continued on next page)

Platform Notes (Continued)

```
Architecture:                    x86_64
CPU op-mode(s):                  32-bit, 64-bit
Byte Order:                      Little Endian
Address sizes:                   46 bits physical, 57 bits virtual
CPU(s):                          144
On-line CPU(s) list:             0-143
Thread(s) per core:              2
Core(s) per socket:              36
Socket(s):                       2
NUMA node(s):                    4
Vendor ID:                       GenuineIntel
CPU family:                      6
Model:                           106
Model name:                      Intel(R) Xeon(R) Platinum 8360Y CPU @ 2.40GHz
Stepping:                        6
CPU MHz:                         3247.215
CPU max MHz:                     3500.0000
CPU min MHz:                     800.0000
BogoMIPS:                        4800.00
Virtualization:                  VT-x
L1d cache:                       3.4 MiB
L1i cache:                       2.3 MiB
L2 cache:                        90 MiB
L3 cache:                        108 MiB
NUMA node0 CPU(s):               0-17,72-89
NUMA node1 CPU(s):               18-35,90-107
NUMA node2 CPU(s):               36-53,108-125
NUMA node3 CPU(s):               54-71,126-143
Vulnerability Itlb multihit:     Not affected
Vulnerability L1tf:              Not affected
Vulnerability Mds:               Not affected
Vulnerability Meltdown:          Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
prctl and seccomp
Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user
pointer sanitization
Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB
filling
Vulnerability Srbds:             Not affected
Vulnerability Tsx async abort:   Not affected
Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2
ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
epb cat_l3 invpcid_single ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
```

(Continued on next page)

Platform Notes (Continued)

```
     flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms
     invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
     intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
     cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat
     pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke
     avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
     la57 rdpid fsrm md_clear pconfig flush_l1d arch_capabilities

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     3.4M   12 Data            1    64        1             64
     L1i       32K     2.3M    8 Instruction     1    64        1             64
     L2       1.3M      90M   20 Unified         2  1024        1             64
     L3        54M     108M   12 Unified         3 73728        1             64

/proc/cpuinfo cache data
   cache size : 55296 KB

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 72 73 74 75 76 77 78 79 80 81
  82 83 84 85 86 87 88 89
  node 0 size: 515681 MB
  node 0 free: 515205 MB
  node 1 cpus: 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 90 91 92 93 94 95 96
  97 98 99 100 101 102 103 104 105 106 107
  node 1 size: 516053 MB
  node 1 free: 515704 MB
  node 2 cpus: 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 108 109 110 111 112
  113 114 115 116 117 118 119 120 121 122 123 124 125
  node 2 size: 516087 MB
  node 2 free: 515729 MB
  node 3 cpus: 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 126 127 128 129 130
  131 132 133 134 135 136 137 138 139 140 141 142 143
  node 3 size: 516083 MB
  node 3 free: 515640 MB
  node distances:
  node   0   1   2   3
    0:  10  11  20  20
    1:  11  10  20  20
    2:  20  20  10  11
    3:  20  20  11  10

From /proc/meminfo
   MemTotal:       2113439268 kB
   HugePages_Total:       0
```

(Continued on next page)

Platform Notes (Continued)

```
   Hugepagesize:       2048 kB

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
   performance

From /etc/*release* /etc/*version*
   os-release:
      NAME="SLES"
      VERSION="15-SP3"
      VERSION_ID="15.3"
      PRETTY_NAME="SUSE Linux Enterprise Server 15 SP3"
      ID="sles"
      ID_LIKE="suse"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:15:sp3"

uname -a:
   Linux perf-blade1 5.3.18-57-default #1 SMP Wed Apr 28 10:54:41 UTC 2021 (ba3c2e9)
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                          Not affected
CVE-2018-3620 (L1 Terminal Fault):                       Not affected
Microarchitectural Data Sampling:                        Not affected
CVE-2017-5754 (Meltdown):                                Not affected
CVE-2018-3639 (Speculative Store Bypass):                Mitigation: Speculative Store
                                                         Bypass disabled via prctl and
                                                         seccomp
CVE-2017-5753 (Spectre variant 1):                       Mitigation: usercopy/swapgs
                                                         barriers and __user pointer
                                                         sanitization
CVE-2017-5715 (Spectre variant 2):                      Mitigation: Enhanced IBRS, IBPB:
                                                         conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort):                 Not affected

run-level 3 Jan 25 12:46

SPEC is set to: /home/cpu2017
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda3      xfs   181G   54G  127G  30% /home

From /sys/devices/virtual/dmi/id
    Vendor:         Cisco Systems Inc
    Product:        UCSX-210C-M6
    Serial:         FCH25057AMV
```

(Continued on next page)

Platform Notes (Continued)

```
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
interpret this section. The 'dmidecode' program reads system data which is "intended to
allow hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    32x 0xCE00 M393A8G40AB2-CWE 64 GB 2 rank 3200

BIOS:
   BIOS Vendor:       Cisco Systems, Inc.
   BIOS Version:      X210M6.5.0.1d.0.0816211754
   BIOS Date:         08/16/2021
   BIOS Revision:     5.22

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
        | 525.x264_r(base) 557.xz_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
        | 541.leela_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.4.0 Build 20210910_000000
Copyright (C) 1985-2021 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifort`

Base Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`
502.gcc_r: `-DSPEC_LP64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LP64 -DSPEC_LINUX`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:
```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:
```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-mbranches-within-32B-boundaries
```

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks (continued):
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.2021-12-22.html
http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-ICX-revl.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.2021-12-22.xml
http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-ICX-revl.xml

Tested with SPEC CPU®2017 v1.1.8 on 2022-01-27 00:35:21-0500.
Report generated on 2022-02-15 16:27:00 by CPU2017 PS formatter v6442.
Originally published on 2022-02-15.