SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur I24M6 (Intel Xeon Gold 6330N)

SPECrate®2017_int_base = 332

SPECrate®2017_int_peak = 344

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Mar-2022
Hardware Availability: May-2021
Software Availability: Dec-2020

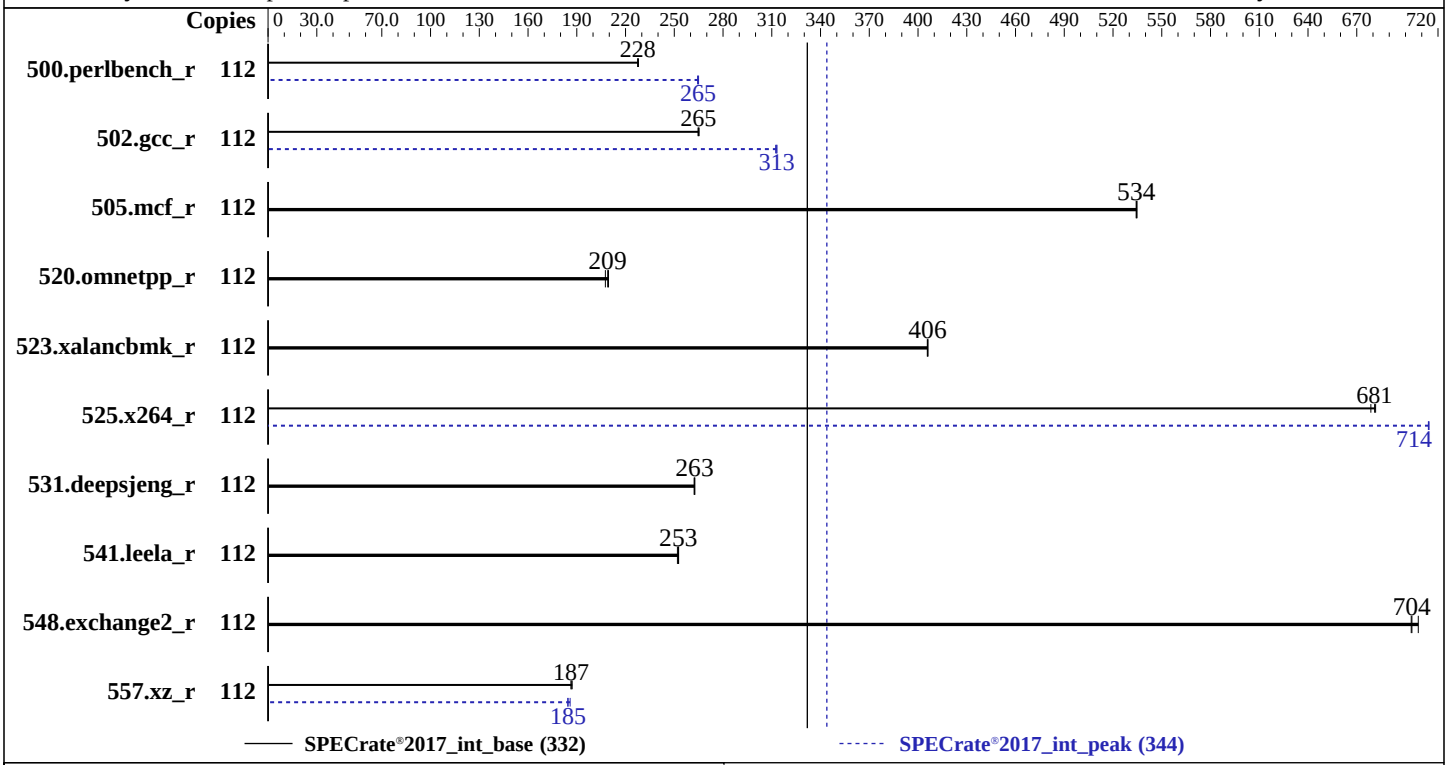

Hardware

CPU Name:	Intel Xeon Gold 6330N
Max MHz:	3400
Nominal:	2200
Enabled:	56 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1.25 MB I+D on chip per core
L3:	42 MB I+D on chip per chip
Other:	None
Memory:	512 GB (16 x 32 GB 2Rx8 PC4-3200AA-R, running at 2666)
Storage:	1 x 480 GB SATA SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux release 8.3 (Ootpa) 4.18.0-240.el8.x86_64
Compiler:	C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux; C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux; Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux
Parallel:	No
Firmware:	Version 05.00.00 released May-2021
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur I24M6 (Intel Xeon Gold 6330N)

SPECrate®2017_int_base = 332

SPECrate®2017_int_peak = 344

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Mar-2022
Hardware Availability: May-2021
Software Availability: Dec-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	112	**784**	**228**	784	228	782	228	112	674	264	**674**	**265**	673	265
502.gcc_r	112	599	265	598	265	**599**	**265**	112	506	313	508	312	**507**	**313**
505.mcf_r	112	**339**	**534**	338	535	339	534	112	**339**	**534**	338	535	339	534
520.omnetpp_r	112	708	208	**703**	**209**	701	210	112	708	208	**703**	**209**	701	210
523.xalancbmk_r	112	**291**	**406**	292	406	291	406	112	**291**	**406**	292	406	291	406
525.x264_r	112	**288**	**681**	289	679	288	682	112	274	714	**275**	**714**	275	714
531.deepsjeng_r	112	490	262	**489**	**263**	489	263	112	490	262	**489**	**263**	489	263
541.leela_r	112	**734**	**253**	736	252	734	253	112	**734**	**253**	736	252	734	253
548.exchange2_r	112	415	708	**417**	**704**	417	704	112	415	708	**417**	**704**	417	704
557.xz_r	112	646	187	649	186	**648**	**187**	112	651	186	**655**	**185**	656	184

SPECrate®2017_int_base = 332

SPECrate®2017_int_peak = 344

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/CPU2017/lib/intel64:/home/CPU2017/lib/ia32:/home/CPU2017/je5.0.1-
     32"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Red Hat Enterprise Linux 8.1
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
```

(Continued on next page)

General Notes (Continued)

```
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5,
and the system compiler gcc 4.8.5;
sources available from jemalloc.net or
https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS and OS configuration:
ENERGY_PERF_BIAS_CFG mode set to Performance
Hardware Prefetch set to Disable
VT Support set to Disable
Sub NUMA Cluster (SNC) set to Enable
Virtual Numa set to Enabled
Scaling_Governor set to Performance

Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Wed Mar  9 18:16:04 2022

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Gold 6330N CPU @ 2.20GHz
      2  "physical id"s (chips)
      112 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 28
      siblings  : 56
      physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
      25 26 27
      physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
      25 26 27
```

(Continued on next page)

Platform Notes (Continued)

```
 From lscpu from util-linux 2.32.1:
      Architecture:        x86_64
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
      CPU(s):              112
      On-line CPU(s) list: 0-111
      Thread(s) per core:  2
      Core(s) per socket:  28
      Socket(s):           2
      NUMA node(s):        8
      Vendor ID:           GenuineIntel
      CPU family:          6
      Model:               106
      Model name:          Intel(R) Xeon(R) Gold 6330N CPU @ 2.20GHz
      Stepping:            6
      CPU MHz:             2600.000
      CPU max MHz:         3400.0000
      CPU min MHz:         800.0000
      BogoMIPS:            4400.00
      Virtualization:      VT-x
      L1d cache:           48K
      L1i cache:           32K
      L2 cache:            1280K
      L3 cache:            43008K
      NUMA node0 CPU(s):   0-6,56-62
      NUMA node1 CPU(s):   7-13,63-69
      NUMA node2 CPU(s):   14-20,70-76
      NUMA node3 CPU(s):   21-27,77-83
      NUMA node4 CPU(s):   28-34,84-90
      NUMA node5 CPU(s):   35-41,91-97
      NUMA node6 CPU(s):   42-48,98-104
      NUMA node7 CPU(s):   49-55,105-111
      Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
     pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
     lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
     aperfmperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
     pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
     rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single intel_ppin
     ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
     erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
     intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
     cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat
     pln pts avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
     avx512_bitalg tme avx512_vpopcntdq la57 rdpid md_clear pconfig flush_l1d
     arch_capabilities
```

(Continued on next page)

Platform Notes (Continued)

```
 /proc/cpuinfo cache data
    cache size : 43008 KB

 From numactl --hardware
 WARNING: a numactl 'node' might or might not correspond to a physical chip.
   available: 8 nodes (0-7)
   node 0 cpus: 0 1 2 3 4 5 6 56 57 58 59 60 61 62
   node 0 size: 63876 MB
   node 0 free: 64374 MB
   node 1 cpus: 7 8 9 10 11 12 13 63 64 65 66 67 68 69
   node 1 size: 63520 MB
   node 1 free: 63878 MB
   node 2 cpus: 14 15 16 17 18 19 20 70 71 72 73 74 75 76
   node 2 size: 64018 MB
   node 2 free: 64332 MB
   node 3 cpus: 21 22 23 24 25 26 27 77 78 79 80 81 82 83
   node 3 size: 63934 MB
   node 3 free: 64371 MB
   node 4 cpus: 28 29 30 31 32 33 34 84 85 86 87 88 89 90
   node 4 size: 63998 MB
   node 4 free: 64388 MB
   node 5 cpus: 35 36 37 38 39 40 41 91 92 93 94 95 96 97
   node 5 size: 63996 MB
   node 5 free: 64393 MB
   node 6 cpus: 42 43 44 45 46 47 48 98 99 100 101 102 103 104
   node 6 size: 63935 MB
   node 6 free: 64374 MB
   node 7 cpus: 49 50 51 52 53 54 55 105 106 107 108 109 110 111
   node 7 size: 63902 MB
   node 7 free: 64390 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  20  20  20  20  20  20  20
     1:  20  10  20  20  20  20  20  20
     2:  20  20  10  20  20  20  20  20
     3:  20  20  20  10  20  20  20  20
     4:  20  20  20  20  10  20  20  20
     5:  20  20  20  20  20  10  20  20
     6:  20  20  20  20  20  20  10  20
     7:  20  20  20  20  20  20  20  10

 From /proc/meminfo
    MemTotal:       527997712 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /sbin/tuned-adm active
```

(Continued on next page)

Platform Notes (Continued)

```
     Current active profile: throughput-performance

 /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
    performance

 From /etc/*release* /etc/*version*
    os-release:
       NAME="Red Hat Enterprise Linux"
       VERSION="8.3 (Ootpa)"
       ID="rhel"
       ID_LIKE="fedora"
       VERSION_ID="8.3"
       PLATFORM_ID="platform:el8"
       PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
       ANSI_COLOR="0;31"
    redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
    system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

 uname -a:
    Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
    x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2018-12207 (iTLB Multihit):                          Not affected
 CVE-2018-3620 (L1 Terminal Fault):                       Not affected
 Microarchitectural Data Sampling:                        Not affected
 CVE-2017-5754 (Meltdown):                                Not affected
 CVE-2018-3639 (Speculative Store Bypass):                Mitigation: Speculative Store
                                                          Bypass disabled via prctl and
                                                          seccomp
 CVE-2017-5753 (Spectre variant 1):                       Mitigation: usercopy/swapgs
                                                          barriers and __user pointer
                                                          sanitization
 CVE-2017-5715 (Spectre variant 2):                      Mitigation: Enhanced IBRS, IBPB:
                                                          conditional, RSB filling
 CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
 CVE-2019-11135 (TSX Asynchronous Abort):                 Not affected

 run-level 3 Mar 9 18:15

 SPEC is set to: /home/CPU2017
    Filesystem            Type  Size  Used Avail Use% Mounted on
    /dev/mapper/rhel-home xfs   372G   11G  361G   3% /home

 From /sys/devices/virtual/dmi/id
```

(Continued on next page)

Platform Notes (Continued)

```
     Vendor:          Inspur
     Product:         NS5160M6
     Product Family: Family
     Serial:          221445494

 Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
 interpret this section. The 'dmidecode' program reads system data which is "intended to
 allow hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     16x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200, configured at 2666

 BIOS:
    BIOS Vendor:       American Megatrends Inc.
    BIOS Version:      05.00.00
    BIOS Date:         05/07/2021
    BIOS Revision:     5.22

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 500.perlbench_r(peak) 557.xz_r(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version
  2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
C       | 500.perlbench_r(peak) 557.xz_r(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version
  2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(peak) 557.xz_r(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version
  2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
```

(Continued on next page)

Compiler Version Notes (Continued)

```
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak)
         | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc

Peak Compiler Invocation

C benchmarks (except as noted below):
icx

500.perlbench_r: icc

557.xz_r: icc

C++ benchmarks:
icpx

Fortran benchmarks:
ifort

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto
-O3 -ffast-math -qopt-mem-layout-trans=4 -fno-alias
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc

(Continued on next page)

Peak Optimization Flags (Continued)

C++ benchmarks:

520.omnetpp_r: `basepeak = yes`

523.xalancbmk_r: `basepeak = yes`

531.deepsjeng_r: `basepeak = yes`

541.leela_r: `basepeak = yes`

Fortran benchmarks:

548.exchange2_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at

`http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html`
`http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V2.5.html`

You can also download the XML flags sources by saving the following links:

`http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml`
`http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V2.5.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-03-09 18:16:04-0500.
Report generated on 2022-03-29 18:00:31 by CPU2017 PS formatter v6442.
Originally published on 2022-03-29.