



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017\_int\_base = 364

xFusion 1288H V6 (Intel Xeon Gold 5320)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Mar-2022

Hardware Availability: Apr-2021

Software Availability: May-2021

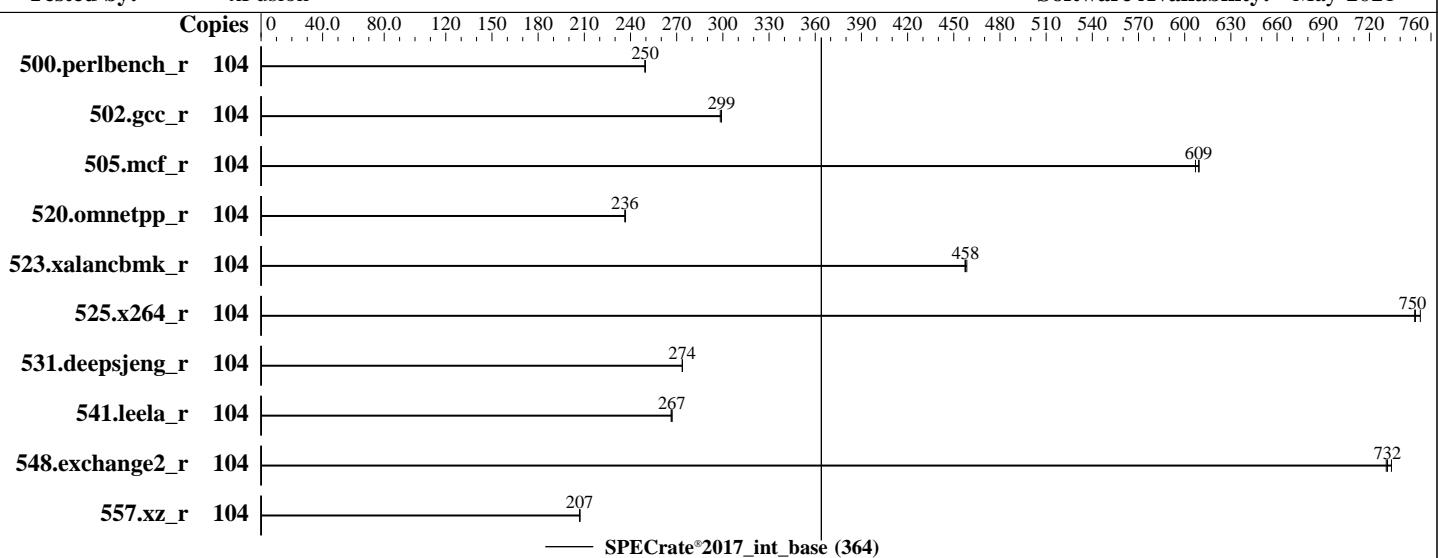

## Hardware

CPU Name: Intel Xeon Gold 5320  
Max MHz: 3400  
Nominal: 2200  
Enabled: 52 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 1.25 MB I+D on chip per core  
L3: 39 MB I+D on chip per chip  
Other: None  
Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R, running at 2933)  
Storage: 1 x 960 GB SATA SSD  
Other: None

## OS:

Red Hat Enterprise Linux release 8.4 (Ootpa) 4.18.0-305.el8.x86\_64

## Compiler:

C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;  
Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux

## Parallel:

No  
Version 0.95 Released Dec-2021

## Firmware:

xfs

## File System:

Run level 3 (multi-user)

## System State:

64-bit

## Base Pointers:

Not Applicable

## Peak Pointers:

None

## Other:

None

## Power Management:

BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**xFusion**

**SPECrate®2017\_int\_base = 364**

**xFusion 1288H V6 (Intel Xeon Gold 5320)**

**SPECrate®2017\_int\_peak = Not Run**

CPU2017 License: 6488

Test Date: Mar-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2021

Tested by: xFusion

Software Availability: May-2021

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	104	664	249	<b>663</b>	<b>250</b>	663	250									
502.gcc_r	104	492	299	494	298	<b>492</b>	<b>299</b>									
505.mcf_r	104	277	607	276	609	<b>276</b>	<b>609</b>									
520.omnetpp_r	104	576	237	<b>577</b>	<b>236</b>	577	236									
523.xalancbmk_r	104	<b>240</b>	<b>458</b>	240	457	240	458									
525.x264_r	104	243	749	242	753	<b>243</b>	<b>750</b>									
531.deepsjeng_r	104	<b>435</b>	<b>274</b>	435	274	435	274									
541.leela_r	104	645	267	<b>645</b>	<b>267</b>	647	266									
548.exchange2_r	104	373	731	<b>372</b>	<b>732</b>	371	734									
557.xz_r	104	<b>543</b>	<b>207</b>	543	207	542	207									

**SPECrate®2017\_int\_base = 364**

**SPECrate®2017\_int\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/spec2017/lib/intel64:/spec2017/lib/ia32:/spec2017/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## xFusion

### xFusion 1288H V6 (Intel Xeon Gold 5320)

SPECrate®2017\_int\_base = 364

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6488

Test Date: Mar-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2021

Tested by: xFusion

Software Availability: May-2021

## General Notes (Continued)

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Performance Profile Set to Performance

SNC Set to Enabled SNC2 (2-clusters)

Sysinfo program /spec2017/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d  
running on localhost.localdomain Mon Mar 14 23:41:28 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 5320 CPU @ 2.20GHz

2 "physical id"s (chips)

104 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 26

siblings : 52

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
25

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
25

From lscpu from util-linux 2.32.1:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 104

On-line CPU(s) list: 0-103

Thread(s) per core: 2

Core(s) per socket: 26

Socket(s): 2

NUMA node(s): 4

Vendor ID: GenuineIntel

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017\_int\_base = 364

xFusion 1288H V6 (Intel Xeon Gold 5320)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6488

Test Date: Mar-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2021

Tested by: xFusion

Software Availability: May-2021

## Platform Notes (Continued)

BIOS Vendor ID: Intel(R) Corporation  
CPU family: 6  
Model: 106  
Model name: Intel(R) Xeon(R) Gold 5320 CPU @ 2.20GHz  
BIOS Model name: Intel(R) Xeon(R) Gold 5320 CPU @ 2.20GHz  
Stepping: 6  
CPU MHz: 2799.931  
BogoMIPS: 4400.00  
Virtualization: VT-x  
L1d cache: 48K  
L1i cache: 32K  
L2 cache: 1280K  
L3 cache: 39936K  
NUMA node0 CPU(s): 0-12,52-64  
NUMA node1 CPU(s): 13-25,65-77  
NUMA node2 CPU(s): 26-38,78-90  
NUMA node3 CPU(s): 39-51,91-103  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid aperfmpf perf pni pclmulqdq dtes64 ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_13 invpcid\_single ssbd mba ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid ept\_ad fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqmq rdt\_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel\_pt avx512cd sha\_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq\_llc cqmq\_occup\_llc cqmq\_mbm\_total cqmq\_mbm\_local split\_lock\_detect wbnoinvd dtherm ida arat pln pts hwp\_epp avx512vbmi umip pku ospke avx512\_vbmi2 gfni vaes vpclmulqdq avx512\_vnni avx512\_bitalg tme avx512\_vpopcntdq la57 rdpid fsrm md\_clear pconfig flush\_l1d arch\_capabilities

/proc/cpuinfo cache data  
cache size : 39936 KB

From numactl --hardware  
WARNING: a numactl 'node' might or might not correspond to a physical chip.  
available: 4 nodes (0-3)  
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 52 53 54 55 56 57 58 59 60 61 62 63 64  
node 0 size: 128182 MB  
node 0 free: 127283 MB  
node 1 cpus: 13 14 15 16 17 18 19 20 21 22 23 24 25 65 66 67 68 69 70 71 72 73 74 75 76 77  
node 1 size: 128981 MB  
node 1 free: 128556 MB  
node 2 cpus: 26 27 28 29 30 31 32 33 34 35 36 37 38 78 79 80 81 82 83 84 85 86 87 88 89 90  
node 2 size: 129018 MB

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017\_int\_base = 364

xFusion 1288H V6 (Intel Xeon Gold 5320)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6488

Test Date: Mar-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2021

Tested by: xFusion

Software Availability: May-2021

## Platform Notes (Continued)

```
node 2 free: 128582 MB
node 3 cpus: 39 40 41 42 43 44 45 46 47 48 49 50 51 91 92 93 94 95 96 97 98 99 100 101
102 103
node 3 size: 129015 MB
node 3 free: 128593 MB
node distances:
node   0   1   2   3
  0: 10 11 20 20
  1: 11 10 20 20
  2: 20 20 10 11
  3: 20 20 11 10

From /proc/meminfo
MemTotal:      527562708 kB
HugePages_Total:      0
Hugepagesize:     2048 kB

/sbin/tuned-adm active
  Current active profile: throughput-performance

From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.4 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.4"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.4 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.4:ga

uname -a:
Linux localhost.localdomain 4.18.0-305.el8.x86_64 #1 SMP Thu Apr 29 08:54:30 EDT 2021
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):          Not affected
CVE-2018-3620 (L1 Terminal Fault):        Not affected
Microarchitectural Data Sampling:          Not affected
CVE-2017-5754 (Meltdown):                 Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
                                                Bypass disabled via prctl and
                                                seccomp
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017\_int\_base = 364

xFusion 1288H V6 (Intel Xeon Gold 5320)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6488

Test Date: Mar-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2021

Tested by: xFusion

Software Availability: May-2021

## Platform Notes (Continued)

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swaps barriers and \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Mar 14 23:30

SPEC is set to: /spec2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	420G	48G	373G	12%	/

From /sys/devices/virtual/dmi/id

Vendor:	XFUSION
Product:	1288H V6
Product Family:	Whitley
Serial:	123456

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200, configured at 2933

BIOS:

BIOS Vendor:	INSYDE Corp.
BIOS Version:	0.95
BIOS Date:	12/22/2021
BIOS Revision:	0.95

(End of data from sysinfo program)

## Compiler Version Notes

=====

C	500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
	525.x264_r(base) 557.xz_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017\_int\_base = 364

xFusion 1288H V6 (Intel Xeon Gold 5320)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6488

Test Date: Mar-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2021

Tested by: xFusion

Software Availability: May-2021

## Compiler Version Notes (Continued)

=====

C++ | 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base)  
| 541.leela\_r(base)

=====

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====

Fortran | 548.exchange2\_r(base)

=====

-----  
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017\_int\_base = 364

xFusion 1288H V6 (Intel Xeon Gold 5320)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6488

Test Date: Mar-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2021

Tested by: xFusion

Software Availability: May-2021

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-auto -mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)  
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-ICX-V1.1.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)  
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-ICX-V1.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-03-14 23:41:28-0400.

Report generated on 2022-04-12 16:18:54 by CPU2017 PDF formatter v6442.

Originally published on 2022-04-12.