SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

xFusion 2488H V6 (Intel Xeon Platinum 8376HL)

SPECspeed®2017_fp_base = 246

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Mar-2022
Hardware Availability: Jun-2020
Software Availability: Dec-2020

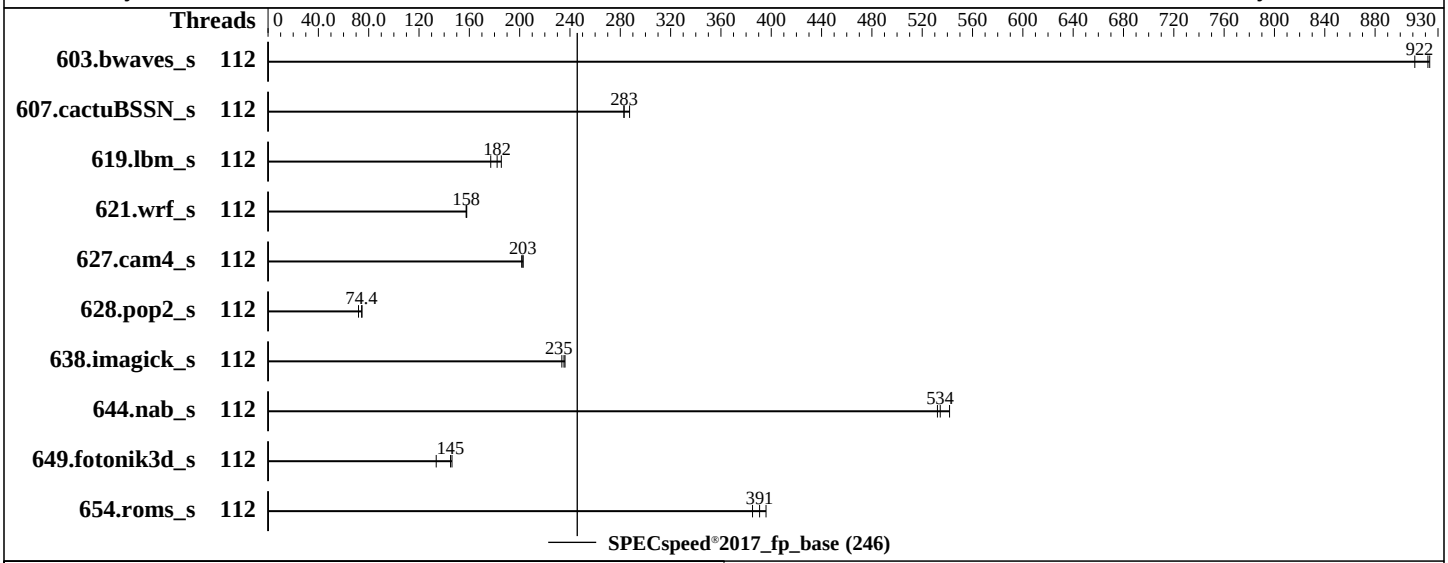

Hardware

CPU Name:	Intel Xeon Platinum 8376HL
Max MHz:	4300
Nominal:	2600
Enabled:	112 cores, 4 chips
Orderable:	2,4 chip
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	38.5 MB I+D on chip per chip
Other:	None
Memory:	1536 GB (48 x 32 GB 2Rx4 PC4-3200AA-R)
Storage:	1 x 960 GB SATA SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux release 8.3 (Ootpa) 4.18.0-240.el8.x86_64
Compiler:	Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux; C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux
Parallel:	Yes
Firmware:	Version 0.81 released Feb-2022
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

xFusion 2488H V6 (Intel Xeon Platinum 8376HL)

SPECspeed®2017_fp_base = 246

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Mar-2022
Hardware Availability: Jun-2020
Software Availability: Dec-2020

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	112	63.9	923	**64.0**	**922**	64.7	912							
607.cactuBSSN_s	112	58.9	283	58.0	287	**58.9**	**283**							
619.lbm_s	112	**28.8**	**182**	29.6	177	28.2	185							
621.wrf_s	112	83.7	158	84.0	158	**83.9**	**158**							
627.cam4_s	112	43.7	203	44.0	202	**43.8**	**203**							
628.pop2_s	112	165	71.9	**160**	**74.4**	159	74.7							
638.imagick_s	112	61.1	236	61.8	234	**61.3**	**235**							
644.nab_s	112	**32.7**	**534**	32.3	542	32.8	532							
649.fotonik3d_s	112	62.3	146	68.2	134	**62.8**	**145**							
654.roms_s	112	40.9	385	39.8	396	**40.3**	**391**							

SPECspeed®2017_fp_base = 246

SPECspeed®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/spec/lib/intel64:/spec/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Red Hat Enterprise Linux 8.1
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
```

(Continued on next page)

General Notes (Continued)

```
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS configuration:
Performance Profile Set to Load Balance
Hyper-Threading Set to Disabled

Sysinfo program /spec/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Fri Mar 25 06:17:27 2022

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8376HL CPU @ 2.60GHz
      4  "physical id"s (chips)
      112 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 28
      siblings  : 28
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30

From lscpu from util-linux 2.32.1:
     Architecture:        x86_64
     CPU op-mode(s):      32-bit, 64-bit
     Byte Order:          Little Endian
```

(Continued on next page)

Platform Notes (Continued)

```
      CPU(s):              112
      On-line CPU(s) list: 0-111
      Thread(s) per core:  1
      Core(s) per socket:  28
      Socket(s):           4
      NUMA node(s):        4
      Vendor ID:           GenuineIntel
      CPU family:          6
      Model:               85
      Model name:          Intel(R) Xeon(R) Platinum 8376HL CPU @ 2.60GHz
      Stepping:            11
      CPU MHz:             1729.229
      CPU max MHz:         4300.0000
      CPU min MHz:         1000.0000
      BogoMIPS:            5200.00
      Virtualization:      VT-x
      L1d cache:           32K
      L1i cache:           32K
      L2 cache:            1024K
      L3 cache:            39424K
      NUMA node0 CPU(s):   0-27
      NUMA node1 CPU(s):   28-55
      NUMA node2 CPU(s):   56-83
      NUMA node3 CPU(s):   84-111
      Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
      invpcid_single ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority
      ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqm mpx
      rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw
      avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
      cqm_mbm_local avx512_bf16 dtherm ida arat pln pts pku ospke avx512_vnni md_clear
      flush_l1d arch_capabilities

  /proc/cpuinfo cache data
     cache size : 39424 KB

  From numactl --hardware
  WARNING: a numactl 'node' might or might not correspond to a physical chip.
    available: 4 nodes (0-3)
    node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
    node 0 size: 374745 MB
    node 0 free: 384650 MB
    node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
```

(Continued on next page)

Platform Notes (Continued)

```
   53 54 55
   node 1 size: 375473 MB
   node 1 free: 386140 MB
   node 2 cpus: 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80
   81 82 83
   node 2 size: 375545 MB
   node 2 free: 386815 MB
   node 3 cpus: 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105
   106 107 108 109 110 111
   node 3 size: 377676 MB
   node 3 free: 386147 MB
   node distances:
   node   0   1   2   3
     0:  10  20  20  20
     1:  20  10  20  20
     2:  20  20  10  20
     3:  20  20  20  10

 From /proc/meminfo
    MemTotal:       1583433652 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /sbin/tuned-adm active
     Current active profile: throughput-performance

 /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
    performance

 From /etc/*release* /etc/*version*
    os-release:
       NAME="Red Hat Enterprise Linux"
       VERSION="8.3 (Ootpa)"
       ID="rhel"
       ID_LIKE="fedora"
       VERSION_ID="8.3"
       PLATFORM_ID="platform:el8"
       PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
       ANSI_COLOR="0;31"
    redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
    system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

 uname -a:
    Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
    x86_64 x86_64 x86_64 GNU/Linux
```

(Continued on next page)

Platform Notes (Continued)

```
 Kernel self-reported vulnerability status:

 CVE-2018-12207 (iTLB Multihit):                        Not affected
 CVE-2018-3620 (L1 Terminal Fault):                     Not affected
 Microarchitectural Data Sampling:                      Not affected
 CVE-2017-5754 (Meltdown):                              Not affected
 CVE-2018-3639 (Speculative Store Bypass):              Mitigation: Speculative Store
                                                        Bypass disabled via prctl and
                                                        seccomp
 CVE-2017-5753 (Spectre variant 1):                     Mitigation: usercopy/swapgs
                                                        barriers and __user pointer
                                                        sanitization
 CVE-2017-5715 (Spectre variant 2):                    Mitigation: Enhanced IBRS, IBPB:
                                                        conditional, RSB filling
 CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
 CVE-2019-11135 (TSX Asynchronous Abort):               Not affected

 run-level 3 Mar 25 04:24

 SPEC is set to: /spec
    Filesystem            Type  Size  Used Avail Use% Mounted on
    /dev/mapper/rhel-root xfs   270G   19G  252G   7% /

 From /sys/devices/virtual/dmi/id
     Vendor:         xFusion
     Product:        2488H V6
     Product Family: Cedar Island
     Serial:         123456

 Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
 interpret this section. The 'dmidecode' program reads system data which is "intended to
 allow hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     48x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200

 BIOS:
    BIOS Vendor:       ByoSoft
    BIOS Version:      0.81
    BIOS Date:         02/10/2022

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 607.cactuBSSN_s(base)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc

(Continued on next page)

Base Compiler Invocation (Continued)

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries

Fortran benchmarks:
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -ipo -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs
-mbranches-within-32B-boundaries -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

Benchmarks using both Fortran and C:
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html
http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-CPX-V1.1.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml
http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-CPX-V1.1.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-03-24 18:17:27-0400.
Report generated on 2022-04-12 16:20:33 by CPU2017 PS formatter v6442.
Originally published on 2022-04-12.