SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124BT-HNTR
(H12DST-B , AMD EPYC 7413)

SPECspeed®2017_fp_base = 184

SPECspeed®2017_fp_peak = 189

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2022
Hardware Availability: Mar-2021
Software Availability: Dec-2021

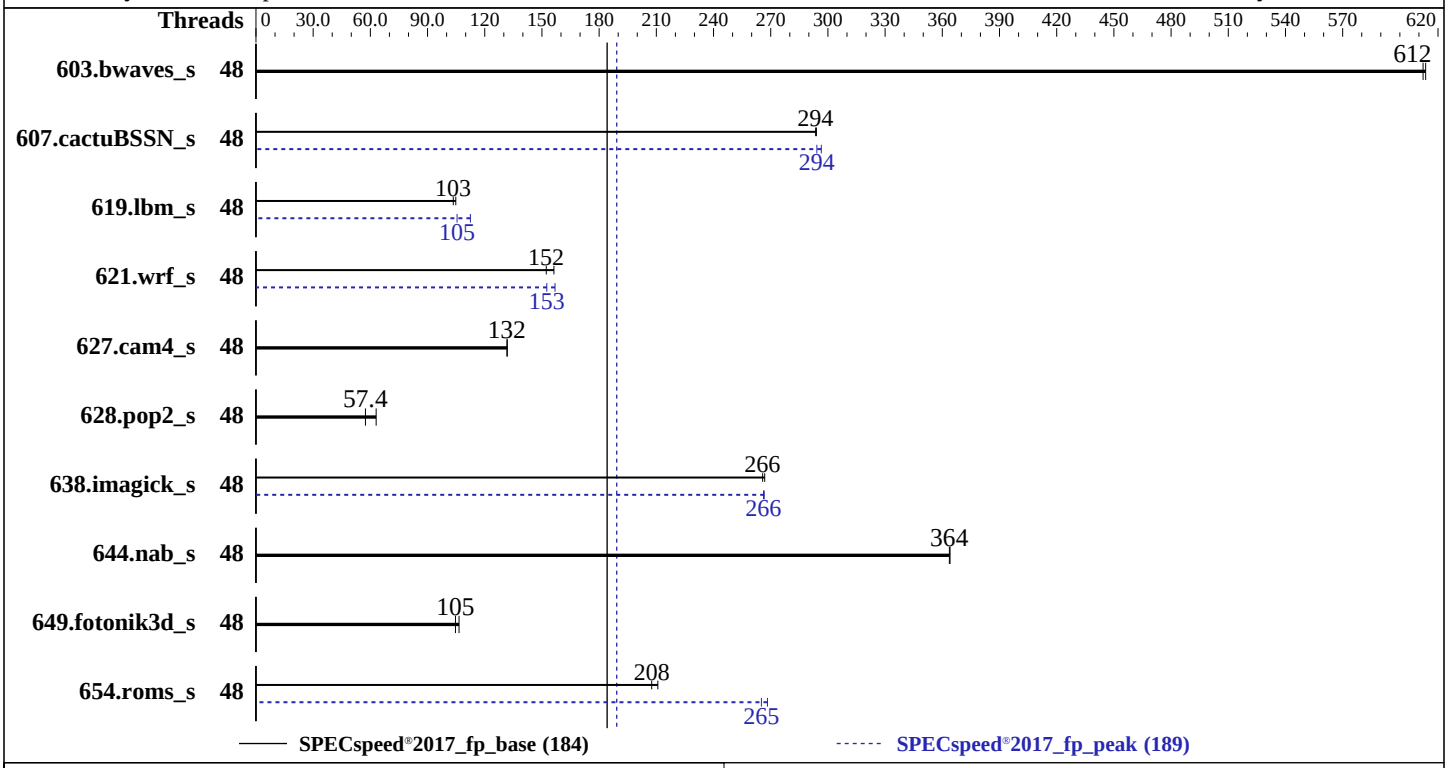

Hardware

CPU Name:	AMD EPYC 7413
Max MHz:	3600
Nominal:	2650
Enabled:	48 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	128 MB I+D on chip per chip, 32 MB shared / 6 cores
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)
Storage:	1 x 200 GB SATA III SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP3 Kernel 5.3.18-57-default
Compiler:	C/C++/Fortran: Version 3.2.0 of AOCC
Parallel:	Yes
Firmware:	Version 2.4 released Apr-2022
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc: jemalloc memory allocator library v5.1.0
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	48	96.2	614	**96.4**	**612**			48	96.2	614	**96.4**	**612**		
607.cactuBSSN_s	48	56.7	294	**56.8**	**294**			48	**56.7**	**294**	56.2	297		
619.lbm_s	48	50.0	105	**50.6**	**103**			48	46.6	112	**49.7**	**105**		
621.wrf_s	48	**86.9**	**152**	84.6	156			48	**86.7**	**153**	84.3	157		
627.cam4_s	48	67.2	132	**67.3**	**132**			48	67.2	132	**67.3**	**132**		
628.pop2_s	48	**207**	**57.4**	188	63.0			48	**207**	**57.4**	188	63.0		
638.imagick_s	48	**54.3**	**266**	54.1	267			48	**54.2**	**266**	54.1	267		
644.nab_s	48	48.0	364	**48.0**	**364**			48	48.0	364	**48.0**	**364**		
649.fotonik3d_s	48	**87.1**	**105**	85.6	107			48	**87.1**	**105**	85.6	107		
654.roms_s	48	74.7	211	**75.9**	**208**			48	58.7	268	**59.4**	**265**		

SPECspeed®2017_fp_base = 184

SPECspeed®2017_fp_peak = 189

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
```

(Continued on next page)

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To enable THP only on request for peak runs of 628.pop2_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To disable THP for peak runs of 627.cam4_s, 649.fotonik3d_s, and 654.roms_s,
'echo never > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-47"
LD_LIBRARY_PATH =
     "/home/cpu2017/amd_speed_aocc320_milanx_A_lib/lib;/home/cpu2017/amd_spee
     d_aocc320_milanx_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "48"

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:
GOMP_CPU_AFFINITY = "0-47"

Environment variables set by runcpu during the 619.lbm_s peak run:
GOMP_CPU_AFFINITY = "0-47"

Environment variables set by runcpu during the 621.wrf_s peak run:
GOMP_CPU_AFFINITY = "0-47"

Environment variables set by runcpu during the 638.imagick_s peak run:
GOMP_CPU_AFFINITY = "0-47"

Environment variables set by runcpu during the 654.roms_s peak run:
GOMP_CPU_AFFINITY = "0-47"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
```

(Continued on next page)

General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2
```

Platform Notes

```
BIOS Settings:
Determinism Control = Manual
Determinism Slider = Power
cTDP Control = Manual
cTDP = 200
Package Power Limit Control = Manual
Package Power Limit = 200
APBDIS = 1
NUMA Nodes Per Socket = NPS2
SMT Control = Disabled

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on 135-177-61 Mon Jun 20 18:27:53 2022

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD EPYC 7413 24-Core Processor
       2  "physical id"s (chips)
       48 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 24
       siblings  : 24
       physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
       physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

 From lscpu from util-linux 2.36.2:
      Architecture:                    x86_64
      CPU op-mode(s):                  32-bit, 64-bit
      Byte Order:                      Little Endian
      Address sizes:                   48 bits physical, 48 bits virtual
      CPU(s):                          48
```

(Continued on next page)

Platform Notes (Continued)

```
On-line CPU(s) list:             0-47
Thread(s) per core:              1
Core(s) per socket:              24
Socket(s):                       2
NUMA node(s):                    8
Vendor ID:                       AuthenticAMD
CPU family:                      25
Model:                           1
Model name:                      AMD EPYC 7413 24-Core Processor
Stepping:                        1
Frequency boost:                 enabled
CPU MHz:                         1799.327
CPU max MHz:                     2650.0000
CPU min MHz:                     1500.0000
BogoMIPS:                        5299.98
Virtualization:                  AMD-V
L1d cache:                       1.5 MiB
L1i cache:                       1.5 MiB
L2 cache:                        24 MiB
L3 cache:                        256 MiB
NUMA node0 CPU(s):               0-5
NUMA node1 CPU(s):               6-11
NUMA node2 CPU(s):               12-17
NUMA node3 CPU(s):               18-23
NUMA node4 CPU(s):               24-29
NUMA node5 CPU(s):               30-35
NUMA node6 CPU(s):               36-41
NUMA node7 CPU(s):               42-47
Vulnerability Itlb multihit:     Not affected
Vulnerability L1tf:              Not affected
Vulnerability Mds:               Not affected
Vulnerability Meltdown:          Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
prctl and seccomp
Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user
pointer sanitization
Vulnerability Spectre v2:        Mitigation; Full AMD retpoline, IBPB conditional,
IBRS_FW, STIBP disabled, RSB filling
Vulnerability Srbds:             Not affected
Vulnerability Tsx async abort:   Not affected
Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
aperfmperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes
xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
```

(Continued on next page)

Platform Notes (Continued)

```
      ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap
      clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
      cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd amd_ppin arat npt lbrv
      svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
      pfthreshold v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov
      succor smca

  From lscpu --cache:
       NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
       L1d       32K     1.5M    8 Data            1    64        1             64
       L1i       32K     1.5M    8 Instruction     1    64        1             64
       L2       512K      24M    8 Unified         2  1024        1             64
       L3        32M     256M   16 Unified         3 32768        1             64

  /proc/cpuinfo cache data
     cache size : 512 KB

  From numactl --hardware
  WARNING: a numactl 'node' might or might not correspond to a physical chip.
    available: 8 nodes (0-7)
    node 0 cpus: 0 1 2 3 4 5
    node 0 size: 128833 MB
    node 0 free: 128663 MB
    node 1 cpus: 6 7 8 9 10 11
    node 1 size: 129020 MB
    node 1 free: 128910 MB
    node 2 cpus: 12 13 14 15 16 17
    node 2 size: 129022 MB
    node 2 free: 128900 MB
    node 3 cpus: 18 19 20 21 22 23
    node 3 size: 129008 MB
    node 3 free: 128898 MB
    node 4 cpus: 24 25 26 27 28 29
    node 4 size: 129022 MB
    node 4 free: 128904 MB
    node 5 cpus: 30 31 32 33 34 35
    node 5 size: 129020 MB
    node 5 free: 128894 MB
    node 6 cpus: 36 37 38 39 40 41
    node 6 size: 129022 MB
    node 6 free: 128904 MB
    node 7 cpus: 42 43 44 45 46 47
    node 7 size: 128986 MB
    node 7 free: 128641 MB
    node distances:
    node   0   1   2   3   4   5   6   7
      0:  10  11  12  12  32  32  32  32
```

(Continued on next page)

Platform Notes (Continued)

```
     1:  11  10  12  12  32  32  32  32
     2:  12  12  10  11  32  32  32  32
     3:  12  12  11  10  32  32  32  32
     4:  32  32  32  32  10  11  12  12
     5:  32  32  32  32  11  10  12  12
     6:  32  32  32  32  12  12  10  11
     7:  32  32  32  32  12  12  11  10

  From /proc/meminfo
     MemTotal:       1056701396 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
     performance

  From /etc/*release* /etc/*version*
     os-release:
        NAME="SLES"
        VERSION="15-SP3"
        VERSION_ID="15.3"
        PRETTY_NAME="SUSE Linux Enterprise Server 15 SP3"
        ID="sles"
        ID_LIKE="suse"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:15:sp3"

  uname -a:
     Linux 135-177-61 5.3.18-57-default #1 SMP Wed Apr 28 10:54:41 UTC 2021 (ba3c2e9)
     x86_64 x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2018-12207 (iTLB Multihit):                          Not affected
  CVE-2018-3620 (L1 Terminal Fault):                       Not affected
  Microarchitectural Data Sampling:                        Not affected
  CVE-2017-5754 (Meltdown):                                Not affected
  CVE-2018-3639 (Speculative Store Bypass):                Mitigation: Speculative Store
                                                           Bypass disabled via prctl and
                                                           seccomp
  CVE-2017-5753 (Spectre variant 1):                       Mitigation: usercopy/swapgs
                                                           barriers and __user pointer
                                                           sanitization
  CVE-2017-5715 (Spectre variant 2):                       Mitigation: Full AMD retpoline,
                                                          IBPB: conditional, IBRS_FW, STIBP:
                                                           disabled, RSB filling
  CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
 CVE-2019-11135 (TSX Asynchronous Abort):              Not affected

 run-level 3 Jun 20 15:51

 SPEC is set to: /home/cpu2017
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda4      xfs   144G  3.7G  141G   3% /home

 From /sys/devices/virtual/dmi/id
     Vendor:         Supermicro
     Product:        AS-2124BT-HNTR
     Serial:         0123456789abcdefghij

 Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
 interpret this section. The 'dmidecode' program reads system data which is "intended to
 allow hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     16x SK Hynix HMAA8GR7AJR4N-XN 64 GB 2 rank 3200

 BIOS:
    BIOS Vendor:       American Megatrends Inc.
    BIOS Version:      2.4
    BIOS Date:         04/19/2022
    BIOS Revision:     5.22

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
                | 644.nab_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                | 654.roms_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                | 628.pop2_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

(Continued on next page)

Base Compiler Invocation (Continued)

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks (continued):
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -z muldefs -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

Benchmarks using both Fortran and C:
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang

Benchmarks using Fortran, C, and C++:
-m64 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -z muldefs -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

Base Other Flags

C benchmarks:
`-Wno-unused-command-line-argument -Wno-return-type`

Fortran benchmarks:
`-Wno-unused-command-line-argument -Wno-return-type`

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument -Wno-return-type`

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument -Wno-return-type`

Peak Compiler Invocation

C benchmarks:
`clang`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

619.lbm_s: `-m64 -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5 -mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization`

(Continued on next page)

Peak Optimization Flags (Continued)

619.lbm_s (continued):
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

638.imagick_s: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -do-block-reorder=aggressive -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: basepeak = yes

654.roms_s: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-Mrecursive -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang

Benchmarks using both Fortran and C:

621.wrf_s: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp

(Continued on next page)

Peak Optimization Flags (Continued)

621.wrf_s (continued):
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -Hz,1,0x1 -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:
-m64 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -Mrecursive
-mllvm -do-block-reorder=aggressive -DSPEC_OPENMP -fopenmp=libomp
-lomp -lamdlibm -ljemalloc -lflang

Peak Other Flags

C benchmarks:
-Wno-unused-command-line-argument -Wno-return-type

(Continued on next page)

Peak Other Flags (Continued)

Fortran benchmarks:
`-Wno-unused-command-line-argument -Wno-return-type`

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument -Wno-return-type`

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument -Wno-return-type`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html`
`http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Milan-revF.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml`
`http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Milan-revF.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-06-20 06:27:53-0400.
Report generated on 2022-07-05 18:15:58 by CPU2017 PS formatter v6442.
Originally published on 2022-07-05.