SPEC CPU®2017 Integer Speed Result

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
Tyrone Camarero DIT400TR-28RL
(2.90 GHz,Intel Xeon Gold 6226R)

SPECspeed®2017_int_base = 10.9

SPECspeed®2017_int_peak = 11.1

CPU2017 License:	006042	**Test Date:**	Sep-2022
Test Sponsor:	Netweb Pte Ltd	**Hardware Availability:**	Apr-2021
Tested by:	Tyrone Systems	**Software Availability:**	May-2022

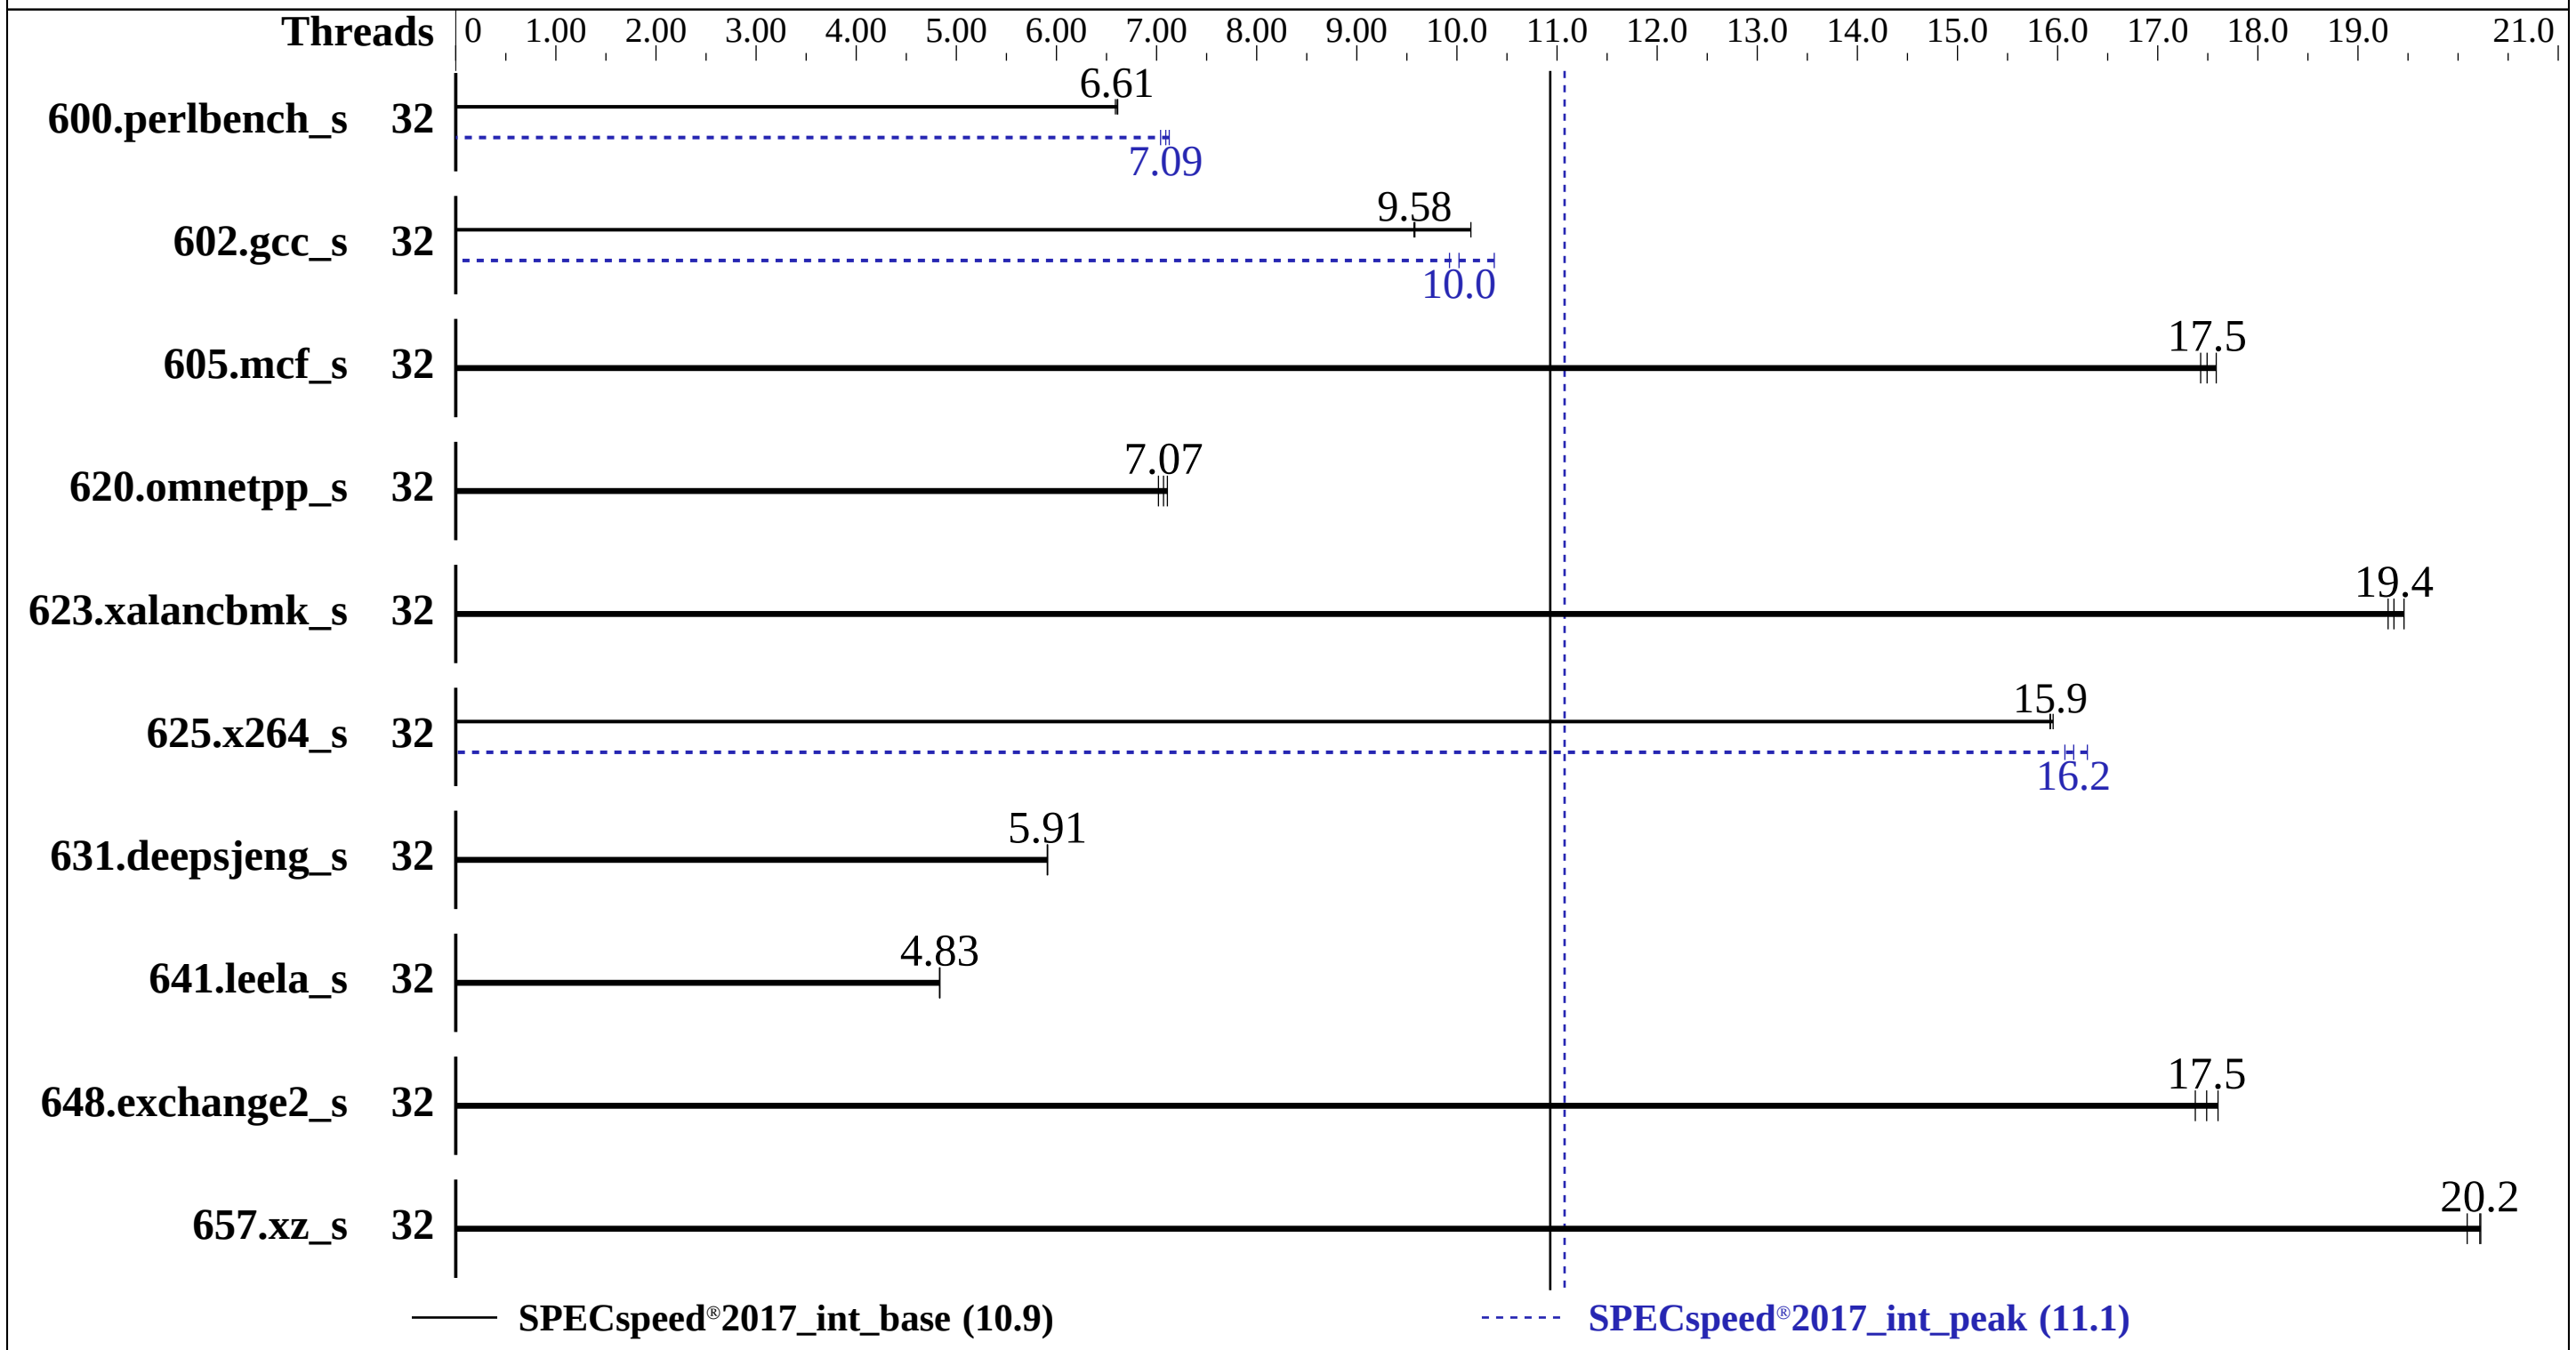

Hardware

CPU Name:	Intel Xeon Gold 6226R
Max MHz:	3900
Nominal:	2900
Enabled:	16 cores, 1 chip, 2 threads/core
Orderable:	1,2 Chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	22 MB I+D on chip per chip
Other:	None
Memory:	512 GB (8 x 64 GB 2Rx4 PC4-3200AA-R, running at 2933)
Storage:	1 x 512 GB NVMe SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux release 8.5 (Ootpa) Kernel 4.18.0-348.el8.x86_64
Compiler:	C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel:	Yes
Firmware:	Version 3.6 released Jan-2022
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Integer Speed Result

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
Tyrone Camarero DIT400TR-28RL
(2.90 GHz,Intel Xeon Gold 6226R)

SPECspeed®2017_int_base = 10.9

SPECspeed®2017_int_peak = 11.1

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems
Test Date: Sep-2022
Hardware Availability: Apr-2021
Software Availability: May-2022

Results Table

	Base							Peak						
Benchmark	**Threads**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Threads**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**
600.perlbench_s	32	268	6.61	269	6.59	**269**	**6.61**	32	**250**	**7.09**	252	7.04	249	7.13
602.gcc_s	32	416	9.57	393	10.1	**416**	**9.58**	32	**397**	**10.0**	401	9.93	384	10.4
605.mcf_s	32	268	17.6	**270**	**17.5**	271	17.4	32	268	17.6	**270**	**17.5**	271	17.4
620.omnetpp_s	32	232	7.02	**231**	**7.07**	229	7.11	32	232	7.02	**231**	**7.07**	229	7.11
623.xalancbmk_s	32	73.4	19.3	72.8	19.5	**73.2**	**19.4**	32	73.4	19.3	72.8	19.5	**73.2**	**19.4**
625.x264_s	32	111	16.0	**111**	**15.9**	111	15.9	32	110	16.1	**109**	**16.2**	108	16.3
631.deepsjeng_s	32	243	5.91	242	5.91	**242**	**5.91**	32	243	5.91	242	5.91	**242**	**5.91**
641.leela_s	32	**353**	**4.83**	353	4.83	353	4.83	32	**353**	**4.83**	353	4.83	353	4.83
648.exchange2_s	32	**168**	**17.5**	169	17.4	167	17.6	32	**168**	**17.5**	169	17.4	167	17.6
657.xz_s	32	**306**	**20.2**	306	20.2	308	20.1	32	**306**	**20.2**	306	20.2	308	20.1

SPECspeed®2017_int_base = 10.9

SPECspeed®2017_int_peak = 11.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
SPEC has ruled that the compiler used for this result was performing a compilation
that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s
benchmarks using a priori knowledge of the SPEC code and dataset to perform a
transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4
https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer
publish results using this optimization.

This result is left in the SPEC results database for historical reference.
```

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
Tyrone Camarero DIT400TR-28RL
(2.90 GHz,Intel Xeon Gold 6226R)

SPECspeed®2017_int_base = 10.9
SPECspeed®2017_int_peak = 11.1

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems
Test Date: Sep-2022
Hardware Availability: Apr-2021
Software Availability: May-2022

General Notes

```
 Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Red Hat Enterprise Linux 8.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the
system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the
system as tested and documented.
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the
system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Settings:
Power Technology = Custom
ENERGY_PERF_BIAS_CFG mode = Maximum Performance
SNC (Sub NUMA)= Enable
KTI Prefetch = Enable
LLC Dead Line Alloc = Disable
Hyper-Threading = Enabled

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on icelake3 Sun Sep 18 12:16:46 2022

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 6226R CPU @ 2.90GHz
       1  "physical id"s (chips)
       32 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 16
       siblings  : 32
       physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

 From lscpu from util-linux 2.32.1:
      Architecture:        x86_64
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
      CPU(s):              32
      On-line CPU(s) list: 0-31
      Thread(s) per core:  2
      Core(s) per socket:  16
      Socket(s):           1
      NUMA node(s):        1
      Vendor ID:           GenuineIntel
      BIOS Vendor ID:      Intel(R) Corporation
      CPU family:          6
```

(Continued on next page)

Platform Notes (Continued)

```
     Model:                 85
     Model name:            Intel(R) Xeon(R) Gold 6226R CPU @ 2.90GHz
     BIOS Model name:       Intel(R) Xeon(R) Gold 6226R CPU @ 2.90GHz
     Stepping:              7
     CPU MHz:               3900.000
     CPU max MHz:           3900.0000
     CPU min MHz:           1200.0000
     BogoMIPS:              5800.00
     Virtualization:        VT-x
     L1d cache:             32K
     L1i cache:             32K
     L2 cache:              1024K
     L3 cache:              22528K
     NUMA node0 CPU(s):     0-31
     Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
     pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
     lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
     aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
     xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
     avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
     invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
     flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms
     invpcid cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt
     avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
     cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear
     flush_l1d arch_capabilities

 /proc/cpuinfo cache data
    cache size : 22528 KB

 From numactl --hardware
 WARNING: a numactl 'node' might or might not correspond to a physical chip.
   available: 1 nodes (0)
   node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
   28 29 30 31
   node 0 size: 514642 MB
   node 0 free: 482620 MB
   node distances:
   node   0
     0:  10

 From /proc/meminfo
    MemTotal:       526993576 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /sbin/tuned-adm active
     Current active profile: throughput-performance

 /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
    performance

 From /etc/*release* /etc/*version*
    os-release:
       NAME="Red Hat Enterprise Linux"
       VERSION="8.5 (Ootpa)"
       ID="rhel"
       ID_LIKE="fedora"
       VERSION_ID="8.5"
       PLATFORM_ID="platform:el8"
```

(Continued on next page)

Platform Notes (Continued)

```
      PRETTY_NAME="Red Hat Enterprise Linux 8.5 (Ootpa)"
      ANSI_COLOR="0;31"
   redhat-release: Red Hat Enterprise Linux release 8.5 (Ootpa)
   system-release: Red Hat Enterprise Linux release 8.5 (Ootpa)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:8::baseos

uname -a:
   Linux icelake3 4.18.0-348.el8.x86_64 #1 SMP Mon Oct 4 12:17:22 EDT 2021 x86_64 x86_64
   x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                       KVM: Mitigation: VMX disabled
CVE-2018-3620 (L1 Terminal Fault):                    Not affected
Microarchitectural Data Sampling:                     Not affected
CVE-2017-5754 (Meltdown):                             Not affected
CVE-2018-3639 (Speculative Store Bypass):             Mitigation: Speculative Store
                                                      Bypass disabled via prctl and
                                                      seccomp
CVE-2017-5753 (Spectre variant 1):                    Mitigation: usercopy/swapgs
                                                      barriers and __user pointer
                                                      sanitization
CVE-2017-5715 (Spectre variant 2):                    Mitigation: Enhanced IBRS, IBPB:
                                                      conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort):              Mitigation: TSX disabled

run-level 3 Sep 16 22:43

SPEC is set to: /home/cpu2017
   Filesystem            Type  Size  Used Avail Use% Mounted on
   /dev/mapper/rhel-home xfs   402G  168G  234G  42% /home

From /sys/devices/virtual/dmi/id
    Vendor:         Tyrone Systems
    Product:        Tyrone Camarero DIT400TR-28RL
    Product Family: SMC X11
    Serial:         TX20752209

Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
interpret this section. The 'dmidecode' program reads system data which is "intended to
allow hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    8x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200, configured at 2934

BIOS:
   BIOS Vendor:       American Megatrends Inc.
   BIOS Version:      3.6
   BIOS Date:         01/25/2022
   BIOS Revision:     5.14

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
        | 657.xz_s(base, peak)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------

================================================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
        | 641.leela_s(base, peak)
------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------

================================================================================================
Fortran | 648.exchange2_s(base, peak)
------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Base Portability Flags

600.perlbench_s: `-DSPEC_LP64 -DSPEC_LINUX_X64`
602.gcc_s: `-DSPEC_LP64`
605.mcf_s: `-DSPEC_LP64`
620.omnetpp_s: `-DSPEC_LP64`
623.xalancbmk_s: `-DSPEC_LP64 -DSPEC_LINUX`
625.x264_s: `-DSPEC_LP64`
631.deepsjeng_s: `-DSPEC_LP64`
641.leela_s: `-DSPEC_LP64`
648.exchange2_s: `-DSPEC_LP64`
657.xz_s: `-DSPEC_LP64`

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
Tyrone Camarero DIT400TR-28RL
(2.90 GHz,Intel Xeon Gold 6226R)

SPECspeed®2017_int_base = 10.9
SPECspeed®2017_int_peak = 11.1

CPU2017 License:	006042	**Test Date:**	Sep-2022
Test Sponsor:	Netweb Pte Ltd	**Hardware Availability:**	Apr-2021
Tested by:	Tyrone Systems	**Software Availability:**	May-2022

Base Optimization Flags

C benchmarks:
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:
-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:
-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1) -fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -fno-strict-overflow -L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
Tyrone Camarero DIT400TR-28RL
(2.90 GHz,Intel Xeon Gold 6226R)

SPECspeed®2017_int_base = 10.9

SPECspeed®2017_int_peak = 11.1

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems
Test Date: Sep-2022
Hardware Availability: Apr-2021
Software Availability: May-2022

Peak Optimization Flags (Continued)

600.perlbench_s (continued):
-ljemalloc

602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

605.mcf_s: basepeak = yes

625.x264_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html
http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-ICX-revA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml
http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-ICX-revA.xml

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-09-18 02:46:45-0400.
Report generated on 2024-01-29 17:07:27 by CPU2017 PS formatter v6716.
Originally published on 2022-10-11.