SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7625 (AMD EPYC 9654 96-Core Processor)

SPECspeed®2017_fp_base = 427

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2022
Hardware Availability: Nov-2022
Software Availability: Nov-2022

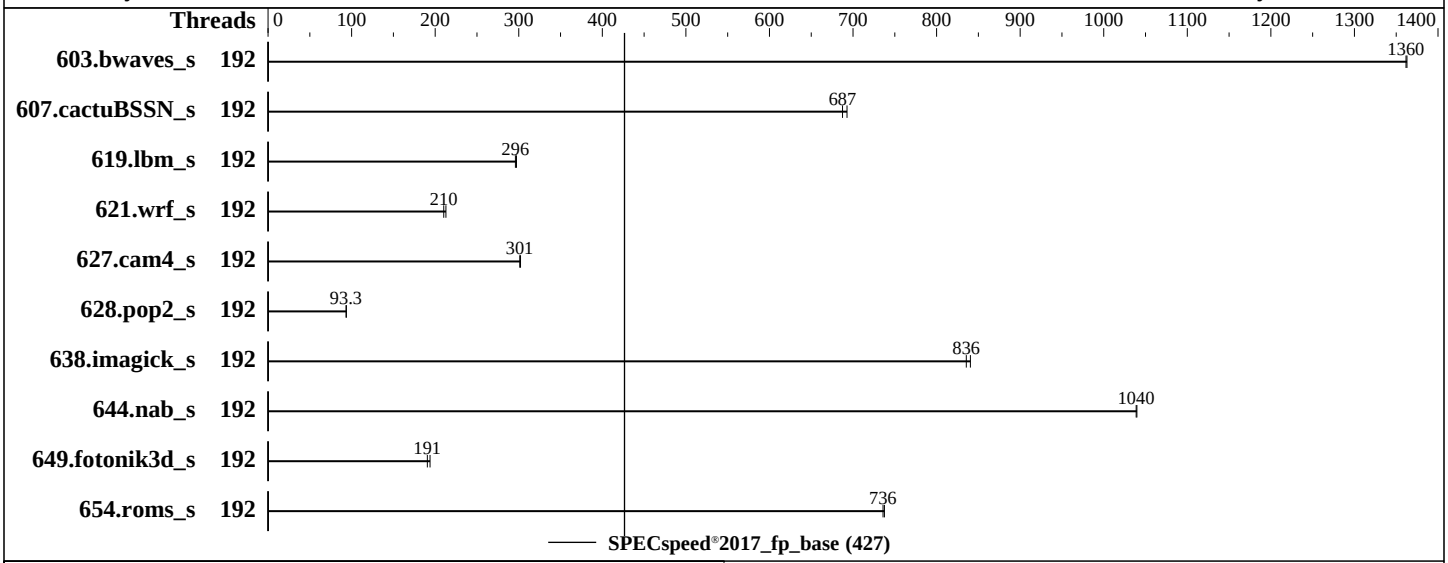

Hardware

CPU Name:	AMD EPYC 9654
Max MHz:	3700
Nominal:	2400
Enabled:	192 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	384 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	125 GB on tmpfs
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default
Compiler:	C/C++/Fortran: Version 4.0.0 of AOCC
Parallel:	Yes
Firmware:	Version 1.0.0 released Sep-2022
File System:	tmpfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	192	43.3	1360	**43.3**	**1360**									
607.cactuBSSN_s	192	24.1	693	**24.2**	**687**									
619.lbm_s	192	**17.7**	**296**	17.6	297									
621.wrf_s	192	62.1	213	**62.9**	**210**									
627.cam4_s	192	29.3	302	**29.4**	**301**									
628.pop2_s	192	127	93.7	**127**	**93.3**									
638.imagick_s	192	**17.3**	**836**	17.2	840									
644.nab_s	192	16.8	1040	**16.8**	**1040**									
649.fotonik3d_s	192	**47.8**	**191**	47.0	194									
654.roms_s	192	**21.4**	**736**	21.3	738									

SPECspeed®2017_fp_base = 427

SPECspeed®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
```

(Continued on next page)

Operating System Notes (Continued)

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To always enable THP for peak runs of:
603.bwaves_s, 607.cactuBSSN_s, 619.lbm_s, 627.cam4_s, 628.pop2_s, 638.imagick_s, 644.nab_s, 649.fotonik3d_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
To disable THP for peak runs of 621.wrf_s:
'echo never > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
To enable THP only on request for peak runs of 654.roms_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-191"
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.8-aocc400-B1a/amd_speed_aocc400_genoa_B_lib/li
b:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "192"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

Platform Notes

```
BIOS settings:
            DRAM Refresh Delay : Performance
        DIMM Self Healing on
    Uncorrectable Memory Error : Disabled
             Logical Processor : Disabled
     Virtualization Technology : Disabled
       L3 Cache as NUMA Domain : Enabled

                System Profile : Custom
                      C-States : Disabled
           Memory Patrol Scrub : Disabled
           PCI ASPM L1 Link
              Power Management : Disabled
            Determinism Slider : Power Determinism
      Algorithm Performance
        Boost Disable (ApbDis) : Enabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.8-aocc400-B1a/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Thu Oct 20 10:53:10 2022

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : AMD EPYC 9654 96-Core Processor
      2  "physical id"s (chips)
      192 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 96
      siblings  : 96
      physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
      25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
      53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80
      81 82 83 84 85 86 87 88 89 90 91 92 93 94 95
      physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
      25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
      53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80
      81 82 83 84 85 86 87 88 89 90 91 92 93 94 95

From lscpu from util-linux 2.37.2:
     Architecture:                    x86_64
     CPU op-mode(s):                  32-bit, 64-bit
     Address sizes:                   52 bits physical, 57 bits virtual
```

(Continued on next page)

Platform Notes (Continued)

```
Byte Order:                      Little Endian
CPU(s):                          192
On-line CPU(s) list:             0-191
Vendor ID:                       AuthenticAMD
Model name:                      AMD EPYC 9654 96-Core Processor
CPU family:                      25
Model:                           17
Thread(s) per core:              1
Core(s) per socket:              96
Socket(s):                       2
Stepping:                        1
Frequency boost:                 enabled
CPU max MHz:                     3707.8120
CPU min MHz:                     1500.0000
BogoMIPS:                        4801.62
Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
rdpid overflow_recov succor smca fsrm flush_l1d
Virtualization:                  AMD-V
L1d cache:                       6 MiB (192 instances)
L1i cache:                       6 MiB (192 instances)
L2 cache:                        192 MiB (192 instances)
L3 cache:                        768 MiB (24 instances)
NUMA node(s):                    24
NUMA node0 CPU(s):               0-7
NUMA node1 CPU(s):               8-15
NUMA node2 CPU(s):               16-23
NUMA node3 CPU(s):               24-31
NUMA node4 CPU(s):               32-39
NUMA node5 CPU(s):               40-47
NUMA node6 CPU(s):               48-55
NUMA node7 CPU(s):               56-63
NUMA node8 CPU(s):               64-71
NUMA node9 CPU(s):               72-79
NUMA node10 CPU(s):              80-87
```

(Continued on next page)

Platform Notes (Continued)

```
      NUMA node11 CPU(s):                88-95
      NUMA node12 CPU(s):                96-103
      NUMA node13 CPU(s):                104-111
      NUMA node14 CPU(s):                112-119
      NUMA node15 CPU(s):                120-127
      NUMA node16 CPU(s):                128-135
      NUMA node17 CPU(s):                136-143
      NUMA node18 CPU(s):                144-151
      NUMA node19 CPU(s):                152-159
      NUMA node20 CPU(s):                160-167
      NUMA node21 CPU(s):                168-175
      NUMA node22 CPU(s):                176-183
      NUMA node23 CPU(s):                184-191
      Vulnerability Itlb multihit:       Not affected
      Vulnerability L1tf:                Not affected
      Vulnerability Mds:                 Not affected
      Vulnerability Meltdown:            Not affected
      Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
      prctl and seccomp
      Vulnerability Spectre v1:          Mitigation; usercopy/swapgs barriers and __user
      pointer sanitization
      Vulnerability Spectre v2:         Mitigation; Retpolines, IBPB conditional, IBRS_FW,
      STIBP disabled, RSB filling
      Vulnerability Srbds:               Not affected
      Vulnerability Tsx async abort:     Not affected

  From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
      L1d       32K       6M    8 Data            1    64        1             64
      L1i       32K       6M    8 Instruction     1    64        1             64
      L2         1M     192M    8 Unified         2  2048        1             64
      L3        32M     768M   16 Unified         3 32768        1             64

  /proc/cpuinfo cache data
     cache size : 1024 KB

  From numactl --hardware
  WARNING: a numactl 'node' might or might not correspond to a physical chip.
    available: 24 nodes (0-23)
    node 0 cpus: 0 1 2 3 4 5 6 7
    node 0 size: 64055 MB
    node 0 free: 63257 MB
    node 1 cpus: 8 9 10 11 12 13 14 15
    node 1 size: 64509 MB
    node 1 free: 64227 MB
    node 2 cpus: 16 17 18 19 20 21 22 23
    node 2 size: 64509 MB
```

(Continued on next page)

Platform Notes (Continued)

```
node 2 free: 63524 MB
node 3 cpus: 24 25 26 27 28 29 30 31
node 3 size: 64509 MB
node 3 free: 64381 MB
node 4 cpus: 32 33 34 35 36 37 38 39
node 4 size: 64509 MB
node 4 free: 64420 MB
node 5 cpus: 40 41 42 43 44 45 46 47
node 5 size: 64509 MB
node 5 free: 64425 MB
node 6 cpus: 48 49 50 51 52 53 54 55
node 6 size: 64509 MB
node 6 free: 64424 MB
node 7 cpus: 56 57 58 59 60 61 62 63
node 7 size: 64509 MB
node 7 free: 64404 MB
node 8 cpus: 64 65 66 67 68 69 70 71
node 8 size: 64509 MB
node 8 free: 64424 MB
node 9 cpus: 72 73 74 75 76 77 78 79
node 9 size: 64509 MB
node 9 free: 64426 MB
node 10 cpus: 80 81 82 83 84 85 86 87
node 10 size: 64509 MB
node 10 free: 64383 MB
node 11 cpus: 88 89 90 91 92 93 94 95
node 11 size: 64487 MB
node 11 free: 64356 MB
node 12 cpus: 96 97 98 99 100 101 102 103
node 12 size: 64475 MB
node 12 free: 64270 MB
node 13 cpus: 104 105 106 107 108 109 110 111
node 13 size: 64509 MB
node 13 free: 64400 MB
node 14 cpus: 112 113 114 115 116 117 118 119
node 14 size: 64509 MB
node 14 free: 64375 MB
node 15 cpus: 120 121 122 123 124 125 126 127
node 15 size: 64509 MB
node 15 free: 64328 MB
node 16 cpus: 128 129 130 131 132 133 134 135
node 16 size: 64509 MB
node 16 free: 60853 MB
node 17 cpus: 136 137 138 139 140 141 142 143
node 17 size: 64509 MB
node 17 free: 64411 MB
node 18 cpus: 144 145 146 147 148 149 150 151
```

(Continued on next page)

Platform Notes (Continued)

```
node 18 size: 64509 MB
node 18 free: 64410 MB
node 19 cpus: 152 153 154 155 156 157 158 159
node 19 size: 64509 MB
node 19 free: 64343 MB
node 20 cpus: 160 161 162 163 164 165 166 167
node 20 size: 64509 MB
node 20 free: 64397 MB
node 21 cpus: 168 169 170 171 172 173 174 175
node 21 size: 64509 MB
node 21 free: 64383 MB
node 22 cpus: 176 177 178 179 180 181 182 183
node 22 size: 64509 MB
node 22 free: 64400 MB
node 23 cpus: 184 185 186 187 188 189 190 191
node 23 size: 64437 MB
node 23 free: 64311 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15  16  17  18  19
20  21  22  23
  0:  10  11  11  11  11  11  11  11  11  11  11  11  32  32  32  32  32  32  32  32
  32  32  32  32
  1:  11  10  11  11  11  11  11  11  11  11  11  11  32  32  32  32  32  32  32  32
  32  32  32  32
  2:  11  11  10  11  11  11  11  11  11  11  11  11  32  32  32  32  32  32  32  32
  32  32  32  32
  3:  11  11  11  10  11  11  11  11  11  11  11  11  32  32  32  32  32  32  32  32
  32  32  32  32
  4:  11  11  11  11  10  11  11  11  11  11  11  11  32  32  32  32  32  32  32  32
  32  32  32  32
  5:  11  11  11  11  11  10  11  11  11  11  11  11  32  32  32  32  32  32  32  32
  32  32  32  32
  6:  11  11  11  11  11  11  10  11  11  11  11  11  32  32  32  32  32  32  32  32
  32  32  32  32
  7:  11  11  11  11  11  11  11  10  11  11  11  11  32  32  32  32  32  32  32  32
  32  32  32  32
  8:  11  11  11  11  11  11  11  11  10  11  11  11  32  32  32  32  32  32  32  32
  32  32  32  32
  9:  11  11  11  11  11  11  11  11  11  10  11  11  32  32  32  32  32  32  32  32
  32  32  32  32
 10:  11  11  11  11  11  11  11  11  11  11  10  11  32  32  32  32  32  32  32  32
 32  32  32  32
 11:  11  11  11  11  11  11  11  11  11  11  11  10  32  32  32  32  32  32  32  32
 32  32  32  32
 12:  32  32  32  32  32  32  32  32  32  32  32  32  10  11  11  11  11  11  11  11
 11  11  11  11
 13:  32  32  32  32  32  32  32  32  32  32  32  32  11  10  11  11  11  11  11  11
```

(Continued on next page)

Platform Notes (Continued)

```
    11  11  11  11
    14:  32  32  32  32  32  32  32  32  32  32  32  32  11  11  10  11  11  11  11  11
    11  11  11  11
    15:  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  10  11  11  11  11
    11  11  11  11
    16:  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  11  10  11  11  11
    11  11  11  11
    17:  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  11  11  10  11  11
    11  11  11  11
    18:  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  11  11  11  10  11
    11  11  11  11
    19:  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  11  11  11  11  10
    11  11  11  11
    20:  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  11  11  11  11  11
    10  11  11  11
    21:  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  11  11  11  11  11
    11  10  11  11
    22:  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  11  11  11  11  11
    11  11  10  11
    23:  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  11  11  11  11  11
    11  11  11  10

  From /proc/meminfo
     MemTotal:       1584796764 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
     performance

  From /etc/*release* /etc/*version*
     os-release:
        NAME="SLES"
        VERSION="15-SP4"
        VERSION_ID="15.4"
        PRETTY_NAME="SUSE Linux Enterprise Server 15 SP4"
        ID="sles"
        ID_LIKE="suse"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:15:sp4"

  uname -a:
     Linux localhost.localdomain 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May
     11 06:57:18 UTC 2022 (49db222) x86_64 x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:
```

(Continued on next page)

Platform Notes (Continued)

```
CVE-2018-12207 (iTLB Multihit):                    Not affected
CVE-2018-3620 (L1 Terminal Fault):                 Not affected
Microarchitectural Data Sampling:                  Not affected
CVE-2017-5754 (Meltdown):                          Not affected
CVE-2018-3639 (Speculative Store Bypass):          Mitigation: Speculative Store
                                                   Bypass disabled via prctl and
                                                   seccomp
CVE-2017-5753 (Spectre variant 1):                 Mitigation: usercopy/swapgs
                                                   barriers and __user pointer
                                                   sanitization
CVE-2017-5715 (Spectre variant 2):                 Mitigation: Retpolines, IBPB:
                                                   conditional, IBRS_FW, STIBP:
                                                   disabled, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort):           Not affected

run-level 3 Oct 20 09:41

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.8-aocc400-B1a
   Filesystem     Type   Size  Used Avail Use% Mounted on
   tmpfs          tmpfs  125G  3.4G  122G   3% /mnt/ramdisk

From /sys/devices/virtual/dmi/id
    Vendor:         Dell Inc.
    Product:        PowerEdge R7625
    Product Family: PowerEdge
    Serial:         1234567

Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
interpret this section. The 'dmidecode' program reads system data which is "intended to
allow hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    24x 80AD000080AD HMCG94MEBRA109N 64 GB 2 rank 4800

BIOS:
   BIOS Vendor:       Dell Inc.
   BIOS Version:      1.0.0
   BIOS Date:         09/28/2022
   BIOS Revision:     1.0

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 607.cactuBSSN_s(base)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
Fortran         | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
```

(Continued on next page)

Compiler Version Notes (Continued)

```
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`clang`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

Base Portability Flags

603.bwaves_s: `-DSPEC_LP64`
607.cactuBSSN_s: `-DSPEC_LP64`
619.lbm_s: `-DSPEC_LP64`
621.wrf_s: `-DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64`
627.cam4_s: `-DSPEC_CASE_FLAG -DSPEC_LP64`
628.pop2_s: `-DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64`
638.imagick_s: `-DSPEC_LP64`
644.nab_s: `-DSPEC_LP64`
649.fotonik3d_s: `-DSPEC_LP64`
654.roms_s: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
`-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6`
`-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4`
`-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7`

(Continued on next page)

Base Optimization Flags (Continued)

C benchmarks (continued):
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

Benchmarks using both Fortran and C:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

Benchmarks using Fortran, C, and C++:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

Base Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

(Continued on next page)

Base Other Flags (Continued)

Fortran benchmarks:
`-Wno-unused-command-line-argument`

Benchmarks using both Fortran and C:
`-Wno-return-type -Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-return-type -Wno-unused-command-line-argument`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc400-flags.html`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.0.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc400-flags.xml`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.0.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-10-20 11:53:10-0400.
Report generated on 2022-11-14 11:17:23 by CPU2017 PS formatter v6442.
Originally published on 2022-11-11.