



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu


PRIMERGY RX2540 M7, Intel Xeon Platinum 8480+, 2.00GHz

SPECspeed®2017_fp_base = 349

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Dec-2022
Hardware Availability: Mar-2023
Software Availability: Jun-2022

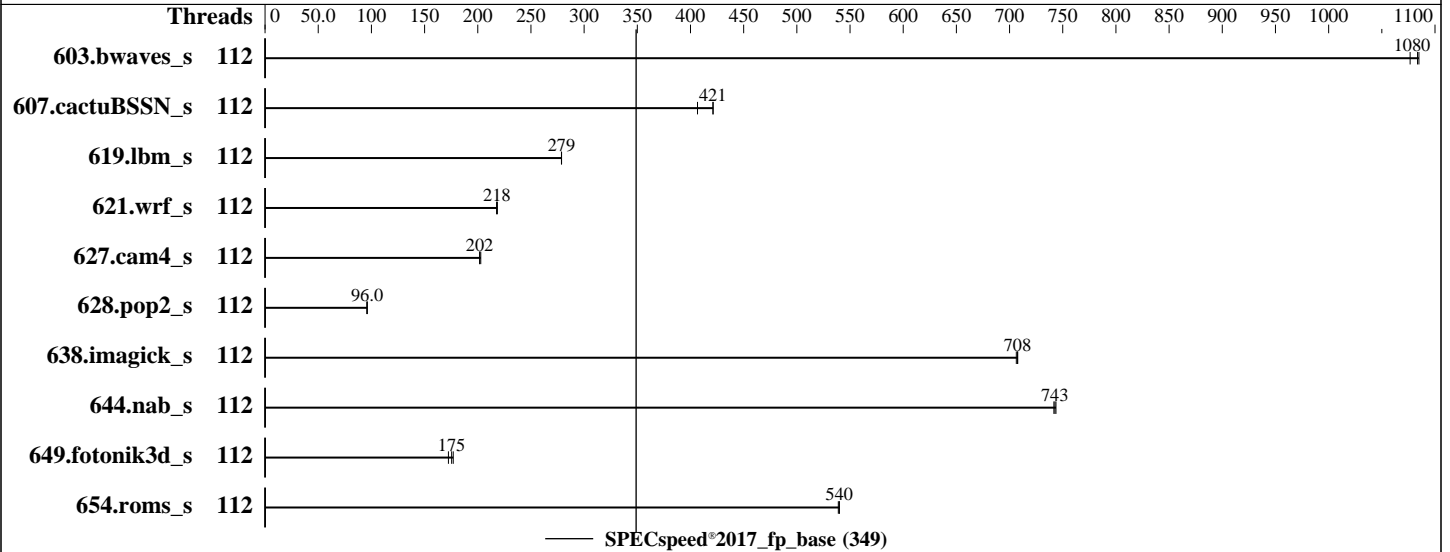

Hardware

CPU Name: Intel Xeon Platinum 8480+
Max MHz: 3800
Nominal: 2000
Enabled: 112 cores, 2 chips
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 105 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
Storage: 1 x SATA SSD, 1.92TB
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default
Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel: Yes
Firmware: Fujitsu BIOS Version V1.0.0.0 R1.10.0 for D3983-A1x. Released Mar-2023 tested as V1.0.0.0 R0.22.1 for D3983-A1x Dec-2022
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8480+, 2.00GHz

SPECspeed®2017_fp_base = 349

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Dec-2022
Hardware Availability: Mar-2023
Software Availability: Jun-2022

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	112	54.8	1080	54.4	1080	54.4	1080							
607.cactuBSSN_s	112	41.0	407	39.6	421	39.6	421							
619.lbm_s	112	18.8	279	18.8	279	18.8	279							
621.wrf_s	112	60.6	218	60.7	218	60.7	218							
627.cam4_s	112	43.9	202	43.7	203	43.9	202							
628.pop2_s	112	124	96.0	124	95.9	124	96.0							
638.imagick_s	112	20.4	706	20.4	708	20.4	708							
644.nab_s	112	23.6	742	23.5	743	23.5	744							
649.fotonik3d_s	112	51.5	177	52.0	175	52.9	172							
654.roms_s	112	29.2	540	29.2	540	29.2	539							

SPECspeed®2017_fp_base = 349

SPECspeed®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH =
  "/home/Benchmark/speccpu-1.1.8/lib/intel64:/home/Benchmark/speccpu-1.1.8
  /je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3> /proc/sys/vm/drop_caches
 NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8480+, 2.00GHz

SPECspeed®2017_fp_base = 349

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Dec-2022
Hardware Availability: Mar-2023
Software Availability: Jun-2022

General Notes (Continued)

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Hyper Threading = Disabled
DCU IP Prefetcher = Disabled
Package C State limit = C0
LLC Prefetch = Enabled
DBP-F = Enabled
CPU Performance Boost = Aggressive
FAN Control = Full

Sysinfo program /home/Benchmark/speccpu-1.1.8/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost Mon Dec 5 23:32:16 2022

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8480+
2 "physical id"s (chips)
112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 56
siblings : 56
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55

From lscpu from util-linux 2.37.2:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 112
On-line CPU(s) list: 0-111
Vendor ID: GenuineIntel

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8480+, 2.00GHz

SPECspeed®2017_fp_base = 349

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Dec-2022
Hardware Availability: Mar-2023
Software Availability: Jun-2022

Platform Notes (Continued)

```

Model name: Intel(R) Xeon(R) Platinum 8480+
CPU family: 6
Model: 143
Thread(s) per core: 1
Core(s) per socket: 56
Socket(s): 2
Stepping: 8
CPU max MHz: 3800.0000
CPU min MHz: 800.0000
BogoMIPS: 4000.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpelgb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx
smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
epb cat_l3 cat_l2 cdp_l3 invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1
hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp
hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke waitpkg avx512_vbmi2
gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk
pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
Virtualization: VT-x
L1d cache: 5.3 MiB (112 instances)
L1i cache: 3.5 MiB (112 instances)
L2 cache: 224 MiB (112 instances)
L3 cache: 210 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-55
NUMA node1 CPU(s): 56-111
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user
pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB
filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8480+, 2.00GHz

SPECspeed®2017_fp_base = 349

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Dec-2022
Hardware Availability: Mar-2023
Software Availability: Jun-2022

Platform Notes (Continued)

From `lscpu --cache:`

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	5.3M	12	Data	1	64	1	64
L1i	32K	3.5M	8	Instruction	1	64	1	64
L2	2M	224M	16	Unified	2	2048	1	64
L3	105M	210M	15	Unified	3	114688	1	64

`/proc/cpuinfo` cache data
cache size : 107520 KB

From `numactl --hardware`

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55

node 0 size: 515662 MB

node 0 free: 514293 MB

node 1 cpus: 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111

node 1 size: 515696 MB

node 1 free: 514725 MB

node distances:

node	0	1
0:	10	21
1:	21	10

From `/proc/meminfo`

MemTotal: 1056111464 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

`/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor` has
powersave

From `/etc/*release* /etc/*version*`

os-release:

NAME="SLES"

VERSION="15-SP4"

VERSION_ID="15.4"

PRETTY_NAME="SUSE Linux Enterprise Server 15 SP4"

ID="sles"

ID_LIKE="suse"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:15:sp4"

`uname -a:`

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8480+, 2.00GHz

SPECspeed®2017_fp_base = 349

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Dec-2022
Hardware Availability: Mar-2023
Software Availability: Jun-2022

Platform Notes (Continued)

Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222/lp) x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Dec 5 23:30

SPEC is set to: /home/Benchmark/speccpu-1.1.8

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	xfs	1.8T	68G	1.7T	4%	/

From /sys/devices/virtual/dmi/id

```
Vendor: FUJITSU
Product: PRIMERGY RX2540 M7
Product Family: SERVER
Serial: EWCExxxxxx
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
10x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800
6x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800
```

BIOS:

```
BIOS Vendor: FUJITSU
BIOS Version: V1.0.0.0 R0.22.1 for D3983-A1x
BIOS Date: 12/01/2022
BIOS Revision: 0.22
Firmware Revision: 2.0
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8480+,
2.00GHz

SPECspeed®2017_fp_base = 349

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Dec-2022
Hardware Availability: Mar-2023
Software Availability: Jun-2022

Platform Notes (Continued)

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 607.cactuBSSN_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran, C | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8480+,
2.00GHz

SPECspeed®2017_fp_base = 349

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Dec-2022
Hardware Availability: Mar-2023
Software Availability: Jun-2022

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -g -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -g -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -g -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8480+,
2.00GHz

SPECspeed®2017_fp_base = 349

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2022

Hardware Availability: Mar-2023

Software Availability: Jun-2022

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -g -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevA.html>

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.2023-01-10.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevA.xml>

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.2023-01-10.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-12-05 09:32:15-0500.

Report generated on 2023-01-10 19:01:12 by CPU2017 PDF formatter v6442.

Originally published on 2023-01-10.