SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

R283-Z90-AAD1-000
(AMD EPYC 9654, 2.4GHz)

SPECrate®2017_int_base = 1690

SPECrate®2017_int_peak = 1820

CPU2017 License: 9082
Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.
Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Dec-2022
Hardware Availability: Nov-2022
Software Availability: Dec-2022

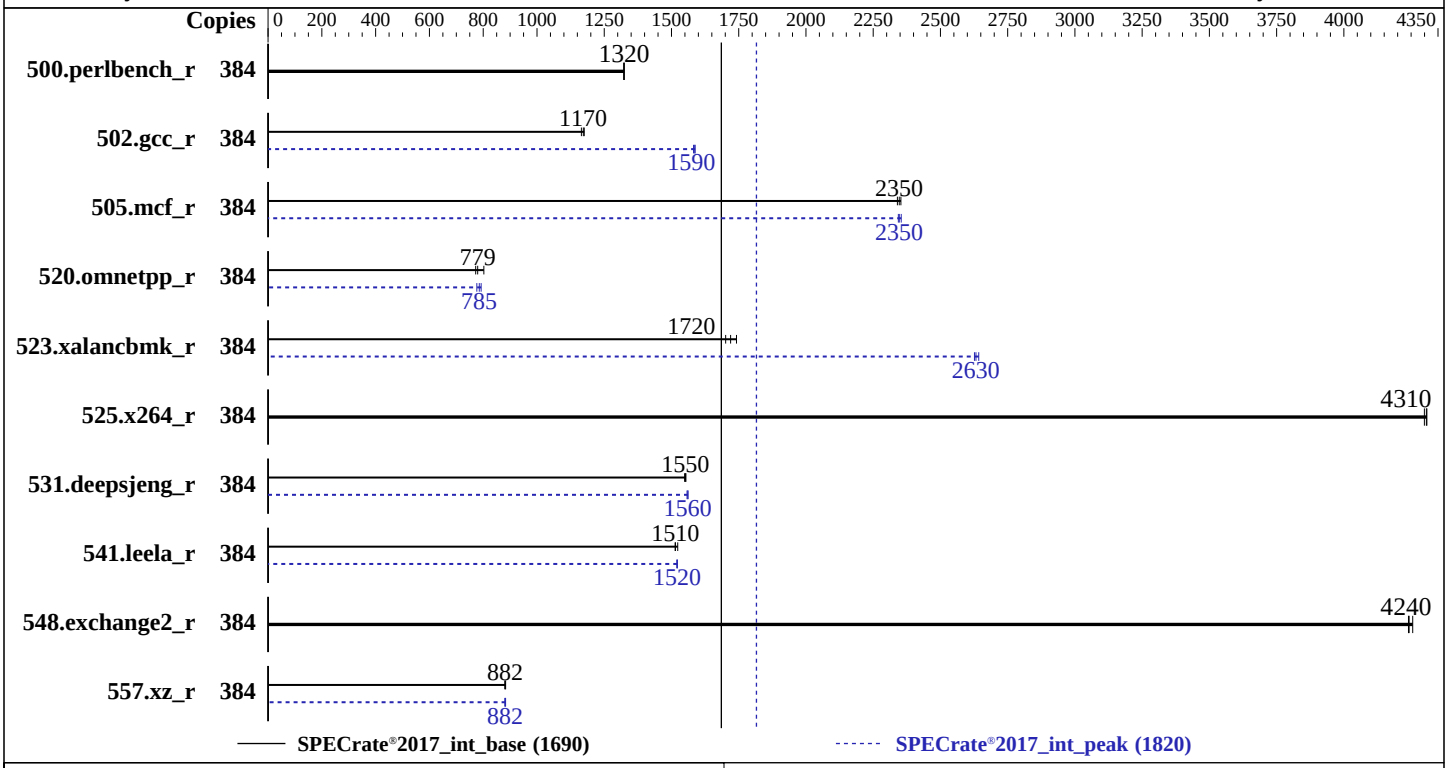

Hardware

CPU Name:	AMD EPYC 9654
Max MHz:	3700
Nominal:	2400
Enabled:	192 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	384 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 3.2 TB PCIE NVME SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP4 (x86_64) 5.14.21-150400.22-default
Compiler:	C/C++/Fortran: Version 4.0.0 of AOCC
Parallel:	No
Firmware:	Version F04 released Dec-2022
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

R283-Z90-AAD1-000
(AMD EPYC 9654, 2.4GHz)

SPECrate®2017_int_base = 1690

SPECrate®2017_int_peak = 1820

CPU2017 License: 9082
Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.
Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Dec-2022
Hardware Availability: Nov-2022
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	384	**462**	**1320**	462	1320	462	1320	384	**462**	**1320**	462	1320	462	1320
502.gcc_r	384	463	1180	**464**	**1170**	467	1170	384	342	1590	344	1580	**343**	**1590**
505.mcf_r	384	**264**	**2350**	264	2350	265	2340	384	264	2350	265	2340	**264**	**2350**
520.omnetpp_r	384	**646**	**779**	628	802	653	772	384	**641**	**785**	636	792	649	776
523.xalancbmk_r	384	238	1700	**236**	**1720**	233	1740	384	**154**	**2630**	154	2630	153	2640
525.x264_r	384	156	4300	156	4310	**156**	**4310**	384	156	4300	156	4310	**156**	**4310**
531.deepsjeng_r	384	284	1550	283	1550	**284**	**1550**	384	282	1560	**282**	**1560**	282	1560
541.leela_r	384	**420**	**1510**	417	1520	420	1510	384	418	1520	418	1520	**418**	**1520**
548.exchange2_r	384	**237**	**4240**	237	4240	236	4260	384	**237**	**4240**	237	4240	236	4260
557.xz_r	384	469	883	471	880	**470**	**882**	384	471	881	470	883	**470**	**882**

SPECrate®2017_int_base = **1690**

SPECrate®2017_int_peak = **1820**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
```

(Continued on next page)

Operating System Notes (Continued)

```
To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2017_rB1/amd_rate_aocc400_genoa_B_lib/lib:/home/cpu2017_rB1/am
     d_rate_aocc400_genoa_B_lib/lib32:"
MALLOC_CONF = "retain:true"

Environment variables set by runcpu during the 523.xalancbmk_r peak run:
MALLOC_CONF = "thp:never"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS settings:
SEV Control = Disable
TSME = Disabled
Determinism Control = Manual
Determinism Enable = Power
TDP Control = Manual
TDP = 400
PPT Control = Manual
PPT = 400
```

(Continued on next page)

Platform Notes (Continued)

```
 Sysinfo program /home/cpu2017_rB1/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on localhost Tue Dec 13 17:32:40 2022

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD EPYC 9654 96-Core Processor
       2  "physical id"s (chips)
       384 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 96
       siblings  : 192
       physical 0: cores 0 1 2 3 4 5 6 7 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25
       26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53
       54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81
       82 83 84 85 86 87 88 89 90 91 92 93 94 95
       physical 1: cores 0 1 2 3 4 5 6 7 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25
       26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53
       54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81
       82 83 84 85 86 87 88 89 90 91 92 93 94 95

 From lscpu from util-linux 2.37.2:
      Architecture:                    x86_64
      CPU op-mode(s):                  32-bit, 64-bit
      Address sizes:                   52 bits physical, 57 bits virtual
      Byte Order:                      Little Endian
      CPU(s):                          384
      On-line CPU(s) list:             0-383
      Vendor ID:                       AuthenticAMD
      Model name:                      AMD EPYC 9654 96-Core Processor
      CPU family:                      25
      Model:                           17
      Thread(s) per core:              2
      Core(s) per socket:              96
      Socket(s):                       2
      Stepping:                        1
      Frequency boost:                 enabled
      CPU max MHz:                     3707.8120
      CPU min MHz:                     1500.0000
      BogoMIPS:                        4800.07
      Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
      pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
      pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
```

(Continued on next page)

Platform Notes (Continued)

```
aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
rdpid overflow_recov succor smca fsrm flush_l1d
Virtualization:                  AMD-V
L1d cache:                       6 MiB (192 instances)
L1i cache:                       6 MiB (192 instances)
L2 cache:                        192 MiB (192 instances)
L3 cache:                        768 MiB (24 instances)
NUMA node(s):                    24
NUMA node0 CPU(s):               0-7,192-199
NUMA node1 CPU(s):               8-15,200-207
NUMA node2 CPU(s):               16-23,208-215
NUMA node3 CPU(s):               24-31,216-223
NUMA node4 CPU(s):               32-39,224-231
NUMA node5 CPU(s):               40-47,232-239
NUMA node6 CPU(s):               48-55,240-247
NUMA node7 CPU(s):               56-63,248-255
NUMA node8 CPU(s):               64-71,256-263
NUMA node9 CPU(s):               72-79,264-271
NUMA node10 CPU(s):              80-87,272-279
NUMA node11 CPU(s):              88-95,280-287
NUMA node12 CPU(s):              96-103,288-295
NUMA node13 CPU(s):              104-111,296-303
NUMA node14 CPU(s):              112-119,304-311
NUMA node15 CPU(s):              120-127,312-319
NUMA node16 CPU(s):              128-135,320-327
NUMA node17 CPU(s):              136-143,328-335
NUMA node18 CPU(s):              144-151,336-343
NUMA node19 CPU(s):              152-159,344-351
NUMA node20 CPU(s):              160-167,352-359
NUMA node21 CPU(s):              168-175,360-367
NUMA node22 CPU(s):              176-183,368-375
NUMA node23 CPU(s):              184-191,376-383
Vulnerability Itlb multihit:     Not affected
Vulnerability L1tf:              Not affected
Vulnerability Mds:               Not affected
Vulnerability Meltdown:          Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
```

(Continued on next page)

Platform Notes (Continued)

```
      prctl and seccomp
      Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user
      pointer sanitization
      Vulnerability Spectre v2:        Mitigation; Retpolines, IBPB conditional, IBRS_FW,
      STIBP always-on, RSB filling
      Vulnerability Srbds:             Not affected
      Vulnerability Tsx async abort:   Not affected

  From lscpu --cache:
       NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
       L1d       32K       6M    8 Data            1    64        1             64
       L1i       32K       6M    8 Instruction     1    64        1             64
       L2         1M     192M    8 Unified         2  2048        1             64
       L3        32M     768M   16 Unified         3 32768        1             64

  /proc/cpuinfo cache data
     cache size : 1024 KB

  From numactl --hardware
  WARNING: a numactl 'node' might or might not correspond to a physical chip.
    available: 24 nodes (0-23)
    node 0 cpus: 0 1 2 3 4 5 6 7 192 193 194 195 196 197 198 199
    node 0 size: 64176 MB
    node 0 free: 61907 MB
    node 1 cpus: 8 9 10 11 12 13 14 15 200 201 202 203 204 205 206 207
    node 1 size: 64506 MB
    node 1 free: 64319 MB
    node 2 cpus: 16 17 18 19 20 21 22 23 208 209 210 211 212 213 214 215
    node 2 size: 64506 MB
    node 2 free: 64329 MB
    node 3 cpus: 24 25 26 27 28 29 30 31 216 217 218 219 220 221 222 223
    node 3 size: 64506 MB
    node 3 free: 64317 MB
    node 4 cpus: 32 33 34 35 36 37 38 39 224 225 226 227 228 229 230 231
    node 4 size: 64506 MB
    node 4 free: 64356 MB
    node 5 cpus: 40 41 42 43 44 45 46 47 232 233 234 235 236 237 238 239
    node 5 size: 64506 MB
    node 5 free: 64353 MB
    node 6 cpus: 48 49 50 51 52 53 54 55 240 241 242 243 244 245 246 247
    node 6 size: 64506 MB
    node 6 free: 64074 MB
    node 7 cpus: 56 57 58 59 60 61 62 63 248 249 250 251 252 253 254 255
    node 7 size: 64506 MB
    node 7 free: 64070 MB
    node 8 cpus: 64 65 66 67 68 69 70 71 256 257 258 259 260 261 262 263
    node 8 size: 64506 MB
```

(Continued on next page)

Platform Notes (Continued)

```
node 8 free: 62901 MB
node 9 cpus: 72 73 74 75 76 77 78 79 264 265 266 267 268 269 270 271
node 9 size: 64506 MB
node 9 free: 64388 MB
node 10 cpus: 80 81 82 83 84 85 86 87 272 273 274 275 276 277 278 279
node 10 size: 64506 MB
node 10 free: 64320 MB
node 11 cpus: 88 89 90 91 92 93 94 95 280 281 282 283 284 285 286 287
node 11 size: 64506 MB
node 11 free: 64306 MB
node 12 cpus: 96 97 98 99 100 101 102 103 288 289 290 291 292 293 294 295
node 12 size: 64506 MB
node 12 free: 64322 MB
node 13 cpus: 104 105 106 107 108 109 110 111 296 297 298 299 300 301 302 303
node 13 size: 64506 MB
node 13 free: 64372 MB
node 14 cpus: 112 113 114 115 116 117 118 119 304 305 306 307 308 309 310 311
node 14 size: 64472 MB
node 14 free: 64314 MB
node 15 cpus: 120 121 122 123 124 125 126 127 312 313 314 315 316 317 318 319
node 15 size: 64506 MB
node 15 free: 64357 MB
node 16 cpus: 128 129 130 131 132 133 134 135 320 321 322 323 324 325 326 327
node 16 size: 64506 MB
node 16 free: 64366 MB
node 17 cpus: 136 137 138 139 140 141 142 143 328 329 330 331 332 333 334 335
node 17 size: 64506 MB
node 17 free: 64370 MB
node 18 cpus: 144 145 146 147 148 149 150 151 336 337 338 339 340 341 342 343
node 18 size: 64506 MB
node 18 free: 64362 MB
node 19 cpus: 152 153 154 155 156 157 158 159 344 345 346 347 348 349 350 351
node 19 size: 64506 MB
node 19 free: 64355 MB
node 20 cpus: 160 161 162 163 164 165 166 167 352 353 354 355 356 357 358 359
node 20 size: 64506 MB
node 20 free: 64308 MB
node 21 cpus: 168 169 170 171 172 173 174 175 360 361 362 363 364 365 366 367
node 21 size: 64506 MB
node 21 free: 64349 MB
node 22 cpus: 176 177 178 179 180 181 182 183 368 369 370 371 372 373 374 375
node 22 size: 64506 MB
node 22 free: 64338 MB
node 23 cpus: 184 185 186 187 188 189 190 191 376 377 378 379 380 381 382 383
node 23 size: 64018 MB
node 23 free: 63837 MB
node distances:
```


(Continued on next page)

Platform Notes (Continued)

```
node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15  16  17  18  19
20  21  22  23
  0:  10  11  11  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  1:  11  10  11  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  2:  11  11  10  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  3:  12  12  12  10  11  11  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  4:  12  12  12  11  10  11  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  5:  12  12  12  11  11  10  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  6:  12  12  12  12  12  12  10  11  11  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  7:  12  12  12  12  12  12  11  10  11  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  8:  12  12  12  12  12  12  11  11  10  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  9:  12  12  12  12  12  12  12  12  12  10  11  11  32  32  32  32  32  32  32  32
  32  32  32  32
 10:  12  12  12  12  12  12  12  12  12  12  11  10  11  32  32  32  32  32  32  32  32
 32  32  32  32
 11:  12  12  12  12  12  12  12  12  12  12  11  11  10  32  32  32  32  32  32  32  32
 32  32  32  32
 12:  32  32  32  32  32  32  32  32  32  32  32  32  32  10  11  11  12  12  12  12  12
 12  12  12  12
 13:  32  32  32  32  32  32  32  32  32  32  32  32  32  11  10  11  12  12  12  12  12
 12  12  12  12
 14:  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  10  12  12  12  12  12
 12  12  12  12
 15:  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  10  11  11  12  12
 12  12  12  12
 16:  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  11  10  11  12  12
 12  12  12  12
 17:  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  11  11  10  12  12
 12  12  12  12
 18:  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  10  11
 11  12  12  12
 19:  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  11  10
 11  12  12  12
 20:  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  11  11
 10  12  12  12
 21:  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12
 12  10  11  11
 22:  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12
```

(Continued on next page)

Platform Notes (Continued)

```
    12  11  10  11
    23:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12
    12  11  11  10

  From /proc/meminfo
     MemTotal:       1584439916 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
     performance

  /usr/bin/lsb_release -d
     SUSE Linux Enterprise Server 15 SP4

  From /etc/*release* /etc/*version*
     os-release:
        NAME="SLES"
        VERSION="15-SP4"
        VERSION_ID="15.4"
        PRETTY_NAME="SUSE Linux Enterprise Server 15 SP4"
        ID="sles"
        ID_LIKE="suse"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:15:sp4"

  uname -a:
     Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18
     UTC 2022 (49db222) x86_64 x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2018-12207 (iTLB Multihit):                          Not affected
  CVE-2018-3620 (L1 Terminal Fault):                       Not affected
  Microarchitectural Data Sampling:                        Not affected
  CVE-2017-5754 (Meltdown):                                Not affected
  CVE-2018-3639 (Speculative Store Bypass):                Mitigation: Speculative Store
                                                           Bypass disabled via prctl and
                                                           seccomp
  CVE-2017-5753 (Spectre variant 1):                       Mitigation: usercopy/swapgs
                                                           barriers and __user pointer
                                                           sanitization
  CVE-2017-5715 (Spectre variant 2):                       Mitigation: Retpolines, IBPB:
                                                           conditional, IBRS_FW, STIBP:
                                                           always-on, RSB filling
  CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
  CVE-2019-11135 (TSX Asynchronous Abort):                 Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
 run-level 3 Dec 13 16:55

 SPEC is set to: /home/cpu2017_rB1
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/nvme0n1p3 xfs   237G   61G  176G  26% /home

 From /sys/devices/virtual/dmi/id
     Vendor:         GIGABYTE
     Product:        R283-Z90-AAD1-000
     Product Family: Server
     Serial:         GMG6D1212A0002

 Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
 interpret this section. The 'dmidecode' program reads system data which is "intended to
 allow hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     24x Micron Technology MTC40F2046S1RC48BA1 64 GB 2 rank 4800

 BIOS:
    BIOS Vendor:       GIGABYTE
    BIOS Version:      F04
    BIOS Date:         12/01/2022
    BIOS Revision:     5.27

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
C++     | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Base Portability Flags

500.perlbench_r: `-DSPEC_LINUX_X64 -DSPEC_LP64`
502.gcc_r: `-DSPEC_LP64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LINUX -DSPEC_LP64`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:
```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdalloc-ext
```

Fortran benchmarks:
```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc
```

Base Other Flags

C benchmarks:
`-Wno-unused-command-line-argument`

C++ benchmarks:
`-Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

Peak Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Peak Portability Flags

500.perlbench_r: `-DSPEC_LINUX_X64 -DSPEC_LP64`
502.gcc_r: `-D_FILE_OFFSET_BITS=64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LINUX -DSPEC_LP64`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Peak Optimization Flags

C benchmarks:

500.perlbench_r: `basepeak = yes`

(Continued on next page)

Peak Optimization Flags (Continued)

502.gcc_r: -m32 -flto -z muldefs -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc

505.mcf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc

525.x264_r: basepeak = yes

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lamdalloc-ext

523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-fno-loop-reroll -Ofast -march=znver4 -fveclib=AMDLIBM
-ffast-math -finline-aggressive
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-lamdalloc-ext

531.deepsjeng_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000

(Continued on next page)

Peak Optimization Flags (Continued)

531.deepsjeng_r (continued):
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lamdalloc-ext

541.leela_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks (except as noted below):
-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument
-L/home/work/cpu2017/v118/aocc4/b1/rate/amd_rate_aocc400_genoa_B_lib/lib32

C++ benchmarks (except as noted below):
-Wno-unused-command-line-argument

523.xalancbmk_r: -L/usr/lib32 -Wno-unused-command-line-argument
-L/home/work/cpu2017/v118/aocc4/b1/rate/amd_rate_aocc400_genoa_B_lib/lib32

Fortran benchmarks:
-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc400-flags.html
http://www.spec.org/cpu2017/flags/GIGA-BYTE-Platform-SPECcpu2017-Flags-V1.1-Genoa.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc400-flags.xml
http://www.spec.org/cpu2017/flags/GIGA-BYTE-Platform-SPECcpu2017-Flags-V1.1-Genoa.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-12-13 04:32:40-0500.
Report generated on 2023-01-17 18:38:44 by CPU2017 PS formatter v6442.
Originally published on 2023-01-17.