SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX760c (Intel Xeon Platinum 8460Y+)

SPECrate®2017_int_base = 657

SPECrate®2017_int_peak = 675

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2022
Hardware Availability: Feb-2023
Software Availability: Nov-2022

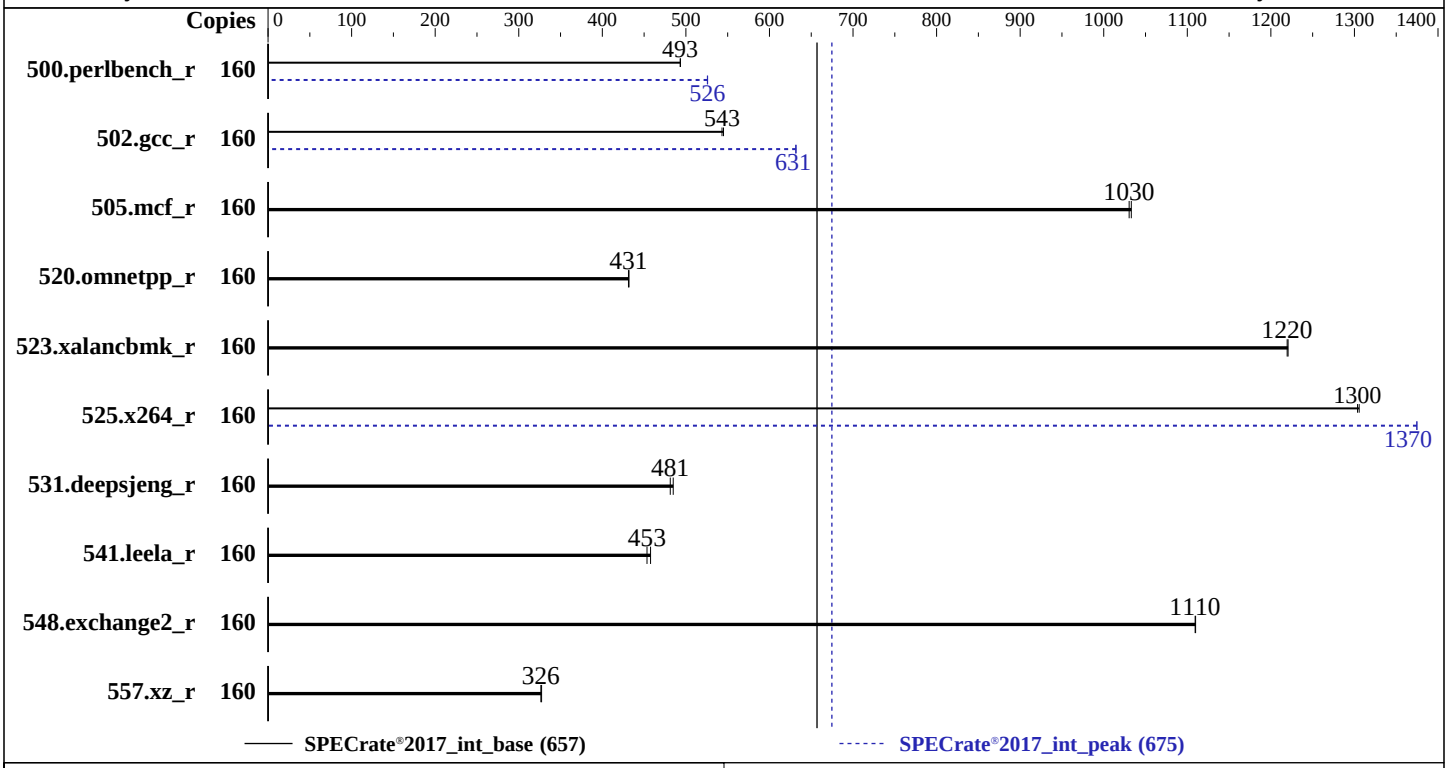

Hardware

CPU Name:	Intel Xeon Platinum 8460Y+
Max MHz:	3700
Nominal:	2000
Enabled:	80 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	105 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	125 GB on tmpfs
Other:	None

Software

OS:	Red Hat Enterprise Linux 8.7 (Ootpa) 4.18.0-425.3.1.el8.x86_64
Compiler:	C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 0.3.2 released Nov-2022
File System:	tmpfs
System State:	Run level 5 (graphical multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX760c (Intel Xeon Platinum 8460Y+)

SPECrate®2017_int_base = 657

SPECrate®2017_int_peak = 675

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2022
Hardware Availability: Feb-2023
Software Availability: Nov-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	160	**516**	**493**	516	493			160	**485**	**526**	484	526		
502.gcc_r	160	**417**	**543**	416	545			160	359	632	**359**	**631**		
505.mcf_r	160	**251**	**1030**	250	1030			160	**251**	**1030**	250	1030		
520.omnetpp_r	160	486	432	**487**	**431**			160	486	432	**487**	**431**		
523.xalancbmk_r	160	**139**	**1220**	138	1220			160	**139**	**1220**	138	1220		
525.x264_r	160	**215**	**1300**	215	1310			160	204	1370	**204**	**1370**		
531.deepsjeng_r	160	**381**	**481**	378	485			160	**381**	**481**	378	485		
541.leela_r	160	579	458	**584**	**453**			160	579	458	**584**	**453**		
548.exchange2_r	160	378	1110	**378**	**1110**			160	378	1110	**378**	**1110**		
557.xz_r	160	528	327	**529**	**326**			160	528	327	**529**	**326**		

SPECrate®2017_int_base = **657**

SPECrate®2017_int_peak = **675**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
SPEC has ruled that the compiler used for this result was performing a compilation
that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s
benchmarks using a priori knowledge of the SPEC code and dataset to perform a
transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4
https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer
publish results using this optimization.

This result is left in the SPEC results database for historical reference.
```

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/mnt/ramdisk/cpu2017-1.1.8-ic2022.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.8-ic2022.1/lib/ia32:/mnt/ram
     disk/cpu2017-1.1.8-ic2022.1/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"
```

Platform Notes

```
BIOS settings:
                ADDDC Setting : Disabled
       DIMM Self Healing on
   Uncorrectable Memory Error : Disabled
    Virtualization Technology : Disabled
             Sub NUMA Cluster : 4-way Clustering
      DCU Streamer Prefetcher : Disabled
                  LLC Prefetch : Disabled
          Dead Line LLC Alloc : Disabled
               Optimizer Mode : Enabled

               System Profile : Custom
         CPU Power Management : Maximum Performance
                         C1E : Disabled
                    C States : Autonomous
          Memory Patrol Scrub : Disabled
     Energy Efficiency Policy : Performance
            PCI ASPM L1 Link
              Power Management : Disabled

 Sysinfo program /mnt/ramdisk/cpu2017-1.1.8-ic2022.1/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on localhost.localdomain Sat Dec  3 06:28:34 2022

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8460Y+
       2  "physical id"s (chips)
       160 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 40
```

(Continued on next page)

Platform Notes (Continued)

```
       siblings  : 80
       physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31 32 33 34 35 36 37 38 39
       physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31 32 33 34 35 36 37 38 39

  From lscpu from util-linux 2.32.1:
       Architecture:        x86_64
       CPU op-mode(s):      32-bit, 64-bit
       Byte Order:          Little Endian
       CPU(s):              160
       On-line CPU(s) list: 0-159
       Thread(s) per core:  2
       Core(s) per socket:  40
       Socket(s):           2
       NUMA node(s):        8
       Vendor ID:           GenuineIntel
       BIOS Vendor ID:      Intel
       CPU family:          6
       Model:               143
       Model name:          Intel(R) Xeon(R) Platinum 8460Y+
       BIOS Model name:     Intel(R) Xeon(R) Platinum 8460Y+
       Stepping:            8
       CPU MHz:             2000.000
       BogoMIPS:            4000.00
       L1d cache:           48K
       L1i cache:           32K
       L2 cache:            2048K
       L3 cache:            107520K
       NUMA node0 CPU(s):   0,4,8,12,16,20,24,28,32,36,80,84,88,92,96,100,104,108,112,116
       NUMA node1 CPU(s):
       40,44,48,52,56,60,64,68,72,76,120,124,128,132,136,140,144,148,152,156
       NUMA node2 CPU(s):   2,6,10,14,18,22,26,30,34,38,82,86,90,94,98,102,106,110,114,118
       NUMA node3 CPU(s):
       42,46,50,54,58,62,66,70,74,78,122,126,130,134,138,142,146,150,154,158
       NUMA node4 CPU(s):   1,5,9,13,17,21,25,29,33,37,81,85,89,93,97,101,105,109,113,117
       NUMA node5 CPU(s):
       41,45,49,53,57,61,65,69,73,77,121,125,129,133,137,141,145,149,153,157
       NUMA node6 CPU(s):   3,7,11,15,19,23,27,31,35,39,83,87,91,95,99,103,107,111,115,119
       NUMA node7 CPU(s):
       43,47,51,55,59,63,67,71,75,79,123,127,131,135,139,143,147,151,155,159
       Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
       pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
       lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
       aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl smx est tm2 ssse3 sdbg
       fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
       xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
       invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust
       bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
       avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
       xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
       split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi
       avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
       avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri
       movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr amx_bf16
       avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities

  /proc/cpuinfo cache data
     cache size : 107520 KB
```

(Continued on next page)

Platform Notes (Continued)

```
From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0 4 8 12 16 20 24 28 32 36 80 84 88 92 96 100 104 108 112 116
  node 0 size: 128216 MB
  node 0 free: 127916 MB
  node 1 cpus: 40 44 48 52 56 60 64 68 72 76 120 124 128 132 136 140 144 148 152 156
  node 1 size: 129019 MB
  node 1 free: 128730 MB
  node 2 cpus: 2 6 10 14 18 22 26 30 34 38 82 86 90 94 98 102 106 110 114 118
  node 2 size: 129019 MB
  node 2 free: 121381 MB
  node 3 cpus: 42 46 50 54 58 62 66 70 74 78 122 126 130 134 138 142 146 150 154 158
  node 3 size: 129019 MB
  node 3 free: 128679 MB
  node 4 cpus: 1 5 9 13 17 21 25 29 33 37 81 85 89 93 97 101 105 109 113 117
  node 4 size: 129019 MB
  node 4 free: 128761 MB
  node 5 cpus: 41 45 49 53 57 61 65 69 73 77 121 125 129 133 137 141 145 149 153 157
  node 5 size: 129019 MB
  node 5 free: 128711 MB
  node 6 cpus: 3 7 11 15 19 23 27 31 35 39 83 87 91 95 99 103 107 111 115 119
  node 6 size: 128977 MB
  node 6 free: 127455 MB
  node 7 cpus: 43 47 51 55 59 63 67 71 75 79 123 127 131 135 139 143 147 151 155 159
  node 7 size: 129007 MB
  node 7 free: 128745 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  12  12  12  21  21  21  21
    1:  12  10  12  12  21  21  21  21
    2:  12  12  10  12  21  21  21  21
    3:  12  12  12  10  21  21  21  21
    4:  21  21  21  21  10  12  12  12
    5:  21  21  21  21  12  10  12  12
    6:  21  21  21  21  12  12  10  12
    7:  21  21  21  21  12  12  12  10

From /proc/meminfo
   MemTotal:       1056050176 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/sbin/tuned-adm active
    Current active profile: throughput-performance

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux"
      VERSION="8.7 (Ootpa)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="8.7"
      PLATFORM_ID="platform:el8"
      PRETTY_NAME="Red Hat Enterprise Linux 8.7 (Ootpa)"
      ANSI_COLOR="0;31"
   redhat-release: Red Hat Enterprise Linux release 8.7 (Ootpa)
   system-release: Red Hat Enterprise Linux release 8.7 (Ootpa)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:8::baseos
```

(Continued on next page)

Platform Notes (Continued)

```
uname -a:
   Linux localhost.localdomain 4.18.0-425.3.1.el8.x86_64 #1 SMP Fri Sep 30 11:45:06 EDT
   2022 x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                        Not affected
CVE-2018-3620 (L1 Terminal Fault):                     Not affected
Microarchitectural Data Sampling:                      Not affected
CVE-2017-5754 (Meltdown):                              Not affected
mmio_stale_data:                                       Not affected
retbleed:                                              Not affected
CVE-2018-3639 (Speculative Store Bypass):              Mitigation: Speculative Store
                                                       Bypass disabled via prctl
CVE-2017-5753 (Spectre variant 1):                     Mitigation: usercopy/swapgs
                                                       barriers and __user pointer
                                                       sanitization
CVE-2017-5715 (Spectre variant 2):                     Mitigation: Enhanced IBRS, IBPB:
                                                       conditional, RSB filling,
                                                       PBRSB-eIBRS: SW sequence
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort):               Not affected

run-level 5 Dec 3 06:26

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.8-ic2022.1
   Filesystem     Type   Size  Used Avail Use% Mounted on
   tmpfs          tmpfs  125G  3.6G  122G   3% /mnt/ramdisk

From /sys/devices/virtual/dmi/id
    Vendor:         Dell Inc.
    Product:        PowerEdge MX760c
    Product Family: PowerEdge
    Serial:         MWCFG04

Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you
interpret this section. The 'dmidecode' program reads system data which is "intended to
allow hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    16x 002C0632002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800

BIOS:
   BIOS Vendor:       Dell Inc.
   BIOS Version:      0.3.2
   BIOS Date:         11/30/2022
   BIOS Revision:     0.3

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================================================
C       | 502.gcc_r(peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 502.gcc_r(peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
        | 541.leela_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 548.exchange2_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Base Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`
502.gcc_r: `-DSPEC_LP64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LP64 -DSPEC_LINUX`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
`-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin -lqkmalloc`

C++ benchmarks:
`-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin -lqkmalloc`

Fortran benchmarks:
`-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin -lqkmalloc`

Peak Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-strict-overflow
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib
-ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: basepeak = yes

C++ benchmarks:

(Continued on next page)

Peak Optimization Flags (Continued)

520.omnetpp_r: `basepeak = yes`

523.xalancbmk_r: `basepeak = yes`

531.deepsjeng_r: `basepeak = yes`

541.leela_r: `basepeak = yes`

Fortran benchmarks:

548.exchange2_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.html`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.2.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.xml`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.2.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-12-02 17:28:33-0500.
Report generated on 2024-01-29 17:18:39 by CPU2017 PS formatter v6716.
Originally published on 2023-01-17.