SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TN24R
(X13DEM , Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 979

SPECrate®2017_fp_peak = 1030

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2023
Hardware Availability: Jan-2023
Software Availability: Jun-2022

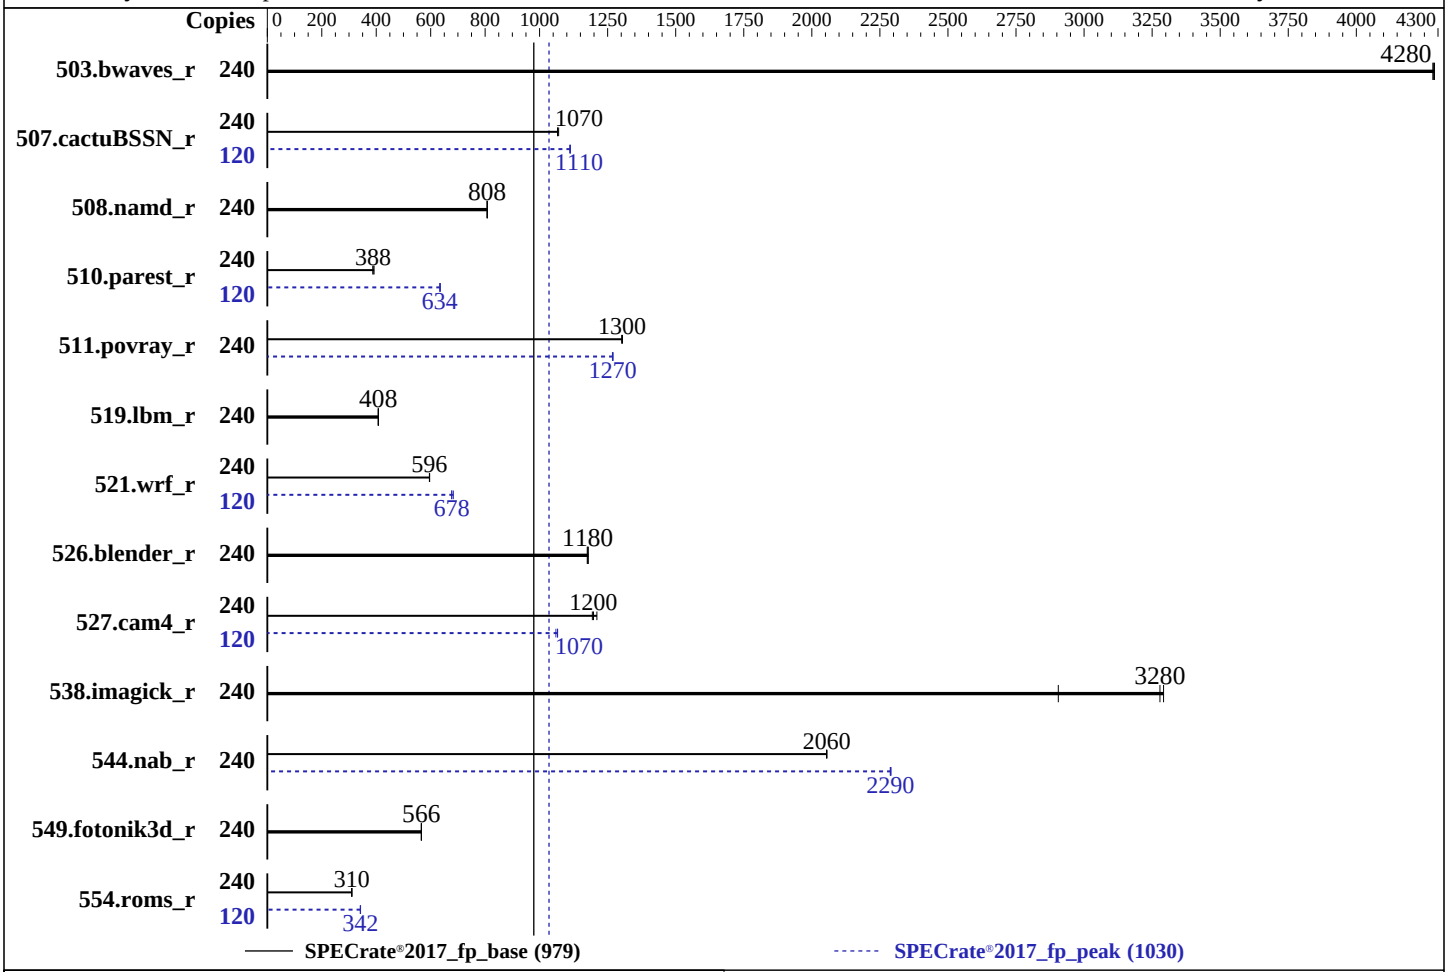

Hardware

CPU Name:	Intel Xeon Platinum 8490H
Max MHz:	3500
Nominal:	1900
Enabled:	120 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	112.5 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 1.92 TB NVMe SSD
Other:	None

Software

OS:	SUSE Linux Enterprise High Performance Computing 15 SP4 5.14.21-150400.22-default
Compiler:	C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 1.1 released Feb-2023
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage.

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	240	561	4290	**562**	**4280**	562	4280	240	561	4290	**562**	**4280**	562	4280
507.cactuBSSN_r	240	285	1070	**285**	**1070**	284	1070	120	136	1110	**137**	**1110**	137	1110
508.namd_r	240	**282**	**808**	282	808	282	807	240	**282**	**808**	282	808	282	807
510.parest_r	240	1619	388	**1617**	**388**	1601	392	120	495	634	494	635	**495**	**634**
511.povray_r	240	430	1300	430	1300	**430**	**1300**	240	441	1270	442	1270	**442**	**1270**
519.lbm_r	240	**621**	**408**	621	408	620	408	240	**621**	**408**	621	408	620	408
521.wrf_r	240	903	595	**903**	**596**	902	596	120	397	677	**397**	**678**	393	683
526.blender_r	240	**311**	**1180**	311	1180	310	1180	240	**311**	**1180**	311	1180	310	1180
527.cam4_r	240	352	1190	**350**	**1200**	347	1210	120	**197**	**1070**	198	1060	197	1070
538.imagick_r	240	181	3290	**182**	**3280**	205	2910	240	181	3290	**182**	**3280**	205	2910
544.nab_r	240	197	2060	197	2050	**197**	**2060**	240	177	2290	**176**	**2290**	176	2290
549.fotonik3d_r	240	1652	566	**1652**	**566**	1654	565	240	1652	566	**1652**	**566**	1654	565
554.roms_r	240	**1229**	**310**	1227	311	1231	310	120	**558**	**342**	558	342	557	342

SPECrate®2017_fp_base = 979

SPECrate®2017_fp_peak = 1030

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
```

(Continued on next page)

General Notes (Continued)

```
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

 NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
 is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Settings:
 Hyper-Threading [ALL] = Enable
 Power Technology = Custom
 Power Performance Tuning = BIOS Controls EPB
 ENERGY_PERF_BIAS_CFG mode = Extreme Performance
 DCU Streamer Prefetcher = Disable
 KTI Prefetch = Enable
 SNC = Enable SNC4 (4-clusters)
 LLC Dead Line Alloc = Disable

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on 165-76 Wed Jan  4 02:21:07 2023

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
```

(Continued on next page)

Platform Notes (Continued)

```
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux 165-76 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222) x86_64
  x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   02:21:08 up  6:54,  1 user,  load average: 177.49, 224.32, 231.48
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                19:27    6:53m  1.11s  0.01s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 4125087
  max locked memory       (kbytes, -l) 64
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 4125087
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 30
 login -- root
 -bash
 -bash
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=240 -c
   ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=120 --define physicalfirst
    --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=240 --configfile
   ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=120 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
    --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
    $SPEC/tmp/CPU2017.010/templogs/preenv.fprate.010.0.log --lognum 010.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Platinum 8490H
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
    stepping        : 6
    microcode       : 0x2b000161
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 60
    siblings        : 120
    2 physical ids (chips)
    240 processors (hardware threads)
    physical id 0: core ids 0-59
    physical id 1: core ids 0-59
    physical id 0: apicids 0-119
    physical id 1: apicids 128-247
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.2:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   46 bits physical, 57 bits virtual
  Byte Order:                      Little Endian
  CPU(s):                          240
```

(Continued on next page)

Platform Notes (Continued)

```
On-line CPU(s) list:             0-239
Vendor ID:                       GenuineIntel
Model name:                      Intel(R) Xeon(R) Platinum 8490H
CPU family:                      6
Model:                           143
Thread(s) per core:              2
Core(s) per socket:              60
Socket(s):                       2
Stepping:                        6
BogoMIPS:                        3800.00
Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                 lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                 nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                 lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                 invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                                 vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                                 bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                                 avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                                 xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                 cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                 arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                                 vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                                 bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                                 tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
Virtualization:                  VT-x
L1d cache:                       5.6 MiB (120 instances)
L1i cache:                       3.8 MiB (120 instances)
L2 cache:                        240 MiB (120 instances)
L3 cache:                        225 MiB (2 instances)
NUMA node(s):                    8
NUMA node0 CPU(s):               0-14,120-134
NUMA node1 CPU(s):               15-29,135-149
NUMA node2 CPU(s):               30-44,150-164
NUMA node3 CPU(s):               45-59,165-179
NUMA node4 CPU(s):               60-74,180-194
NUMA node5 CPU(s):               75-89,195-209
NUMA node6 CPU(s):               90-104,210-224
NUMA node7 CPU(s):               105-119,225-239
Vulnerability Itlb multihit:     Not affected
Vulnerability L1tf:              Not affected
Vulnerability Mds:               Not affected
Vulnerability Meltdown:          Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
  Vulnerability Srbds:               Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     5.6M   12 Data            1     64        1             64
     L1i       32K     3.8M    8 Instruction     1     64        1             64
     L2         2M     240M   16 Unified         2   2048        1             64
     L3     112.5M     225M   15 Unified         3 122880        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0-14,120-134
  node 0 size: 128582 MB
  node 0 free: 113523 MB
  node 1 cpus: 15-29,135-149
  node 1 size: 129016 MB
  node 1 free: 115363 MB
  node 2 cpus: 30-44,150-164
  node 2 size: 129016 MB
  node 2 free: 116791 MB
  node 3 cpus: 45-59,165-179
  node 3 size: 129016 MB
  node 3 free: 116571 MB
  node 4 cpus: 60-74,180-194
  node 4 size: 128981 MB
  node 4 free: 116703 MB
  node 5 cpus: 75-89,195-209
  node 5 size: 129016 MB
  node 5 free: 116755 MB
  node 6 cpus: 90-104,210-224
  node 6 size: 129016 MB
  node 6 free: 116819 MB
  node 7 cpus: 105-119,225-239
  node 7 size: 128649 MB
  node 7 free: 116438 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  12  12  12  21  21  21  21
    1:  12  10  12  12  21  21  21  21
    2:  12  12  10  12  21  21  21  21
    3:  12  12  12  10  21  21  21  21
    4:  21  21  21  21  10  12  12  12
    5:  21  21  21  21  12  10  12  12
```

(Continued on next page)

Platform Notes (Continued)

```
     6:  21  21  21  21  12  12  10  12
     7:  21  21  21  21  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1056046596 kB

------------------------------------------------------------
10. who -r
  run-level 3 Jan 3 19:27

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE             UNIT FILES
  enabled         YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewalld getty@
                  haveged irqbalance issue-generator kbdsettings kdump kdump-early klog lvm2-monitor nscd
                   nvmefc-boot-connections postfix purge-kernels rollback rsyslog smartd sshd wicked
                      wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime   systemd-remount-fs
  disabled        autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                  chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info gpm
                   grub2-once haveged-switch-root ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
                  man-db-create multipathd nfs nfs-blkmap nvmf-autoconnect rdisc rpcbind rpmconfigcheck
                 rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
                 systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned
                      udisks2
  indirect          wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
  root=UUID=08300cd0-4901-419a-8ad6-76b0b6fc220f
  splash=silent
  resume=/dev/disk/by-uuid/39fb07a6-9b70-4901-aaca-462813fc7067
  mitigations=auto
  quiet
  security=apparmor
  crashkernel=320M,high
  crashkernel=72M,low

------------------------------------------------------------
14. cpupower frequency-info
```

(Continued on next page)

Platform Notes (Continued)

```
  analyzing CPU 0:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. tuned-adm active
  It seems that tuned daemon is not running, preset profile is not activated.
  Preset profile: throughput-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
```

(Continued on next page)

Platform Notes (Continued)

```
   pages_to_scan             4096
   scan_sleep_millisecs     10000

 ------------------------------------------------------------
 19. OS release
   From /etc/*-release /etc/*-version
   os-release SUSE Linux Enterprise High Performance Computing 15 SP4

 ------------------------------------------------------------
 20. Disk information
 SPEC is set to: /home/cpu2017
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/nvme0n1p4 xfs   738G  142G  596G  20% /home

 ------------------------------------------------------------
 21. /sys/devices/virtual/dmi/id
     Vendor:          Supermicro
     Product:         Super Server
     Product Family: Family
     Serial:          0123456789

 ------------------------------------------------------------
 22. dmidecode
   Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
      16x Micron Technology MTC40F2046S1RC48BA1 64 GB 2 rank 4800


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       American Megatrends International, LLC.
    BIOS Version:      1.1
    BIOS Date:         12/31/2022
    BIOS Revision:     5.29
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
```

(Continued on next page)

Compiler Version Notes (Continued)

```
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

549.fotonik3d_r: `-DSPEC_LP64`
554.roms_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
`-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

C++ benchmarks:
`-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Fortran benchmarks:
`-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using both Fortran and C:
`-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using both C and C++:
`-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using Fortran, C, and C++:
`-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Peak Compiler Invocation

C benchmarks:
`icx`

(Continued on next page)

Peak Compiler Invocation (Continued)

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -qopt-zmm-usage=high -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)

Peak Optimization Flags (Continued)

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.html
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.xml
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-01-04 05:21:07-0500.
Report generated on 2023-03-01 14:46:49 by CPU2017 PS formatter v6442.
Originally published on 2023-03-01.