



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120i-2M (Intel Xeon Gold 5315Y)

CPU2017 License: 9006


Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Aug-2021

Hardware Availability: Jul-2021

Software Availability: Dec-2020

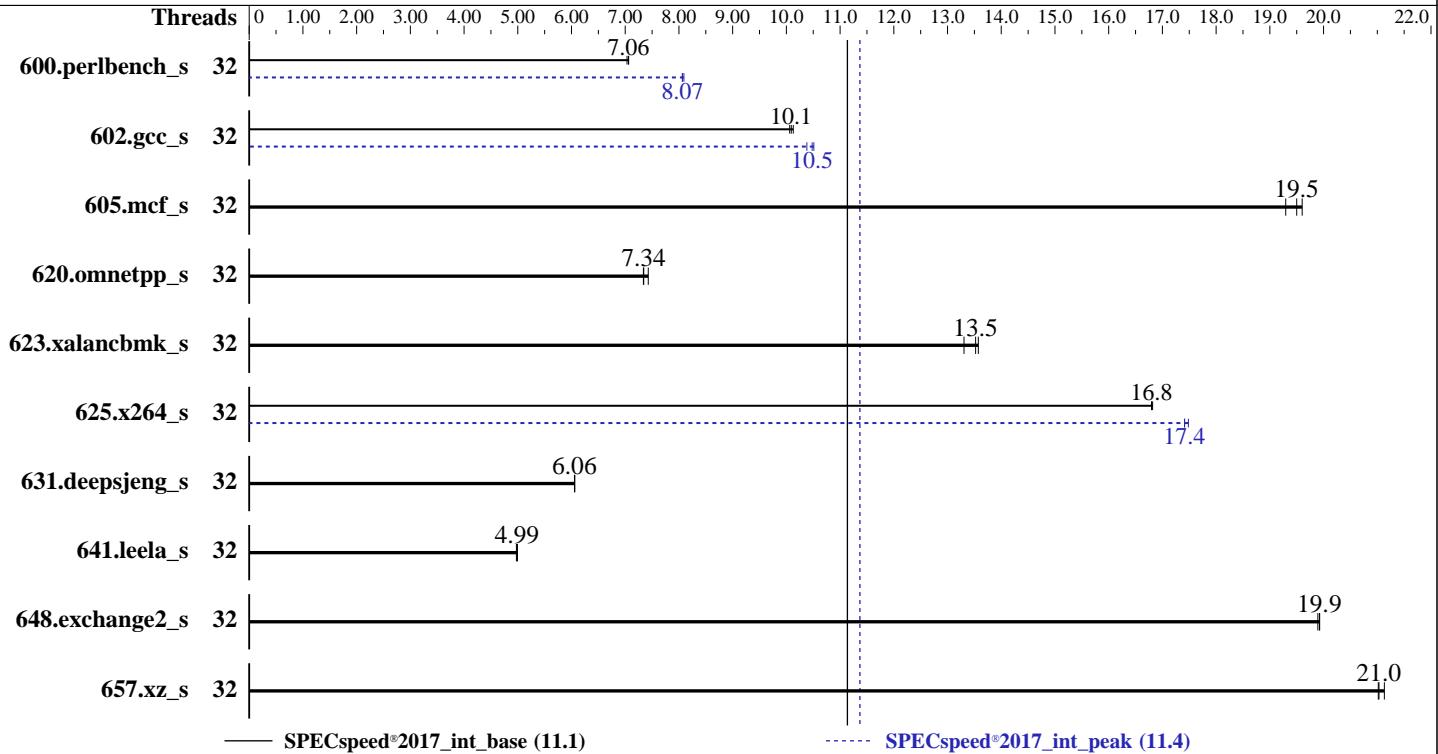

Hardware	
CPU Name:	Intel Xeon Gold 5315Y
Max MHz:	3600
Nominal:	3200
Enabled:	16 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1.25 MB I+D on chip per core
L3:	12 MB I+D on chip per chip
Other:	None
Memory:	2 TB (32 x 64 GB 2Rx4 PC4-3200AA-R, running at 2933)
Storage:	1 x 800 GB SAS SSD, RAID 0
Other:	None

Software	
OS:	Red Hat Enterprise Linux release 8.3 (Ootpa) 4.18.0-240.el8.x86_64
Compiler:	C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux; Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux; C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux
Parallel:	Yes
Firmware:	NEC BIOS Version U46 v1.40 04/28/2021 released Jul-2021
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to balance power and performance.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120i-2M (Intel Xeon Gold 5315Y)

SPECspeed®2017_int_base = 11.1

SPECspeed®2017_int_peak = 11.4

CPU2017 License: 9006

Test Date: Aug-2021

Test Sponsor: NEC Corporation

Hardware Availability: Jul-2021

Tested by: NEC Corporation

Software Availability: Dec-2020

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	32	251	7.06	252	7.03	251	7.06	32	220	8.07	219	8.09	220	8.06		
602.gcc_s	32	393	10.1	396	10.1	395	10.1	32	379	10.5	384	10.4	380	10.5		
605.mcf_s	32	245	19.3	241	19.6	242	19.5	32	245	19.3	241	19.6	242	19.5		
620.omnetpp_s	32	222	7.34	222	7.34	220	7.43	32	222	7.34	222	7.34	220	7.43		
623.xalancbmk_s	32	105	13.5	106	13.3	104	13.6	32	105	13.5	106	13.3	104	13.6		
625.x264_s	32	105	16.8	105	16.8	105	16.8	32	101	17.4	101	17.4	101	17.5		
631.deepsjeng_s	32	236	6.06	237	6.06	237	6.06	32	236	6.06	237	6.06	237	6.06		
641.leela_s	32	342	4.99	343	4.97	342	4.99	32	342	4.99	343	4.97	342	4.99		
648.exchange2_s	32	148	19.9	148	19.9	148	19.9	32	148	19.9	148	19.9	148	19.9		
657.xz_s	32	294	21.0	293	21.1	294	21.0	32	294	21.0	293	21.1	294	21.0		

SPECspeed®2017_int_base = 11.1

SPECspeed®2017_int_peak = 11.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical software and/or firmware described on this result page.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120i-2M (Intel Xeon Gold 5315Y)

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

SPECspeed®2017_int_base = 11.1

SPECspeed®2017_int_peak = 11.4

Test Date: Aug-2021

Hardware Availability: Jul-2021

Software Availability: Dec-2020

General Notes (Continued)

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>. This measured result may not be representative of the result that would be measured were this benchmark run with software and firmware available as of the publication date.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches  
jemalloc, a general purpose malloc implementation
```

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Thermal Configuration: Maximum Cooling

Workload Profile: General Peak Frequency Compute

Advanced Memory Protection: Advanced ECC Support

Memory Patrol Scrubbing: Disabled

Minimum Processor Idle Power Core C-State: C6 State

LLC Dead Line Allocation: Disabled

LLC Prefetch: Enabled

Enhanced Processor Performance: Enabled

Workload Profile: Custom

Minimum Processor Idle Power Package C-State: No Package State

Energy/Performance Bias: Balanced Power

Adjacent Sector Prefetch: Disabled

DCU Stream Prefetcher: Disabled

Numa Group Size Optimization: Flat

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d

running on r120i2m Mon Aug 16 09:00:17 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 5315Y CPU @ 3.20GHz  
 2 "physical id"s (chips)  
 32 "processors"
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120i-2M (Intel Xeon Gold 5315Y)

SPECspeed®2017_int_base = 11.1

SPECspeed®2017_int_peak = 11.4

CPU2017 License: 9006

Test Date: Aug-2021

Test Sponsor: NEC Corporation

Hardware Availability: Jul-2021

Tested by: NEC Corporation

Software Availability: Dec-2020

Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings   : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
```

From lscpu from util-linux 2.32.1:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                32
On-line CPU(s) list:  0-31
Thread(s) per core:   2
Core(s) per socket:   8
Socket(s):             2
NUMA node(s):          2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 106
Model name:            Intel(R) Xeon(R) Gold 5315Y CPU @ 3.20GHz
Stepping:               6
CPU MHz:               800.267
BogoMIPS:              6400.00
Virtualization:        VT-x
L1d cache:             48K
L1i cache:             32K
L2 cache:              1280K
L3 cache:              12288K
NUMA node0 CPU(s):    0-7,16-23
NUMA node1 CPU(s):    8-15,24-31
Flags:     fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology nonstop_tsc cpuid
aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrandlahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 invpcid_single ssbd
mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
avx512_vpocntdq la57 rdpid md_clear pconfig flush_l1d arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 12288 KB
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120i-2M (Intel Xeon Gold 5315Y)

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

SPECspeed®2017_int_base = 11.1

SPECspeed®2017_int_peak = 11.4

Test Date: Aug-2021

Hardware Availability: Jul-2021

Software Availability: Dec-2020

Platform Notes (Continued)

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 16 17 18 19 20 21 22 23
node 0 size: 1010138 MB
node 0 free: 1030962 MB
node 1 cpus: 8 9 10 11 12 13 14 15 24 25 26 27 28 29 30 31
node 1 size: 1009480 MB
node 1 free: 1031443 MB
node distances:
node    0    1
 0:   10   20
 1:   20   10
```

From /proc/meminfo

```
MemTotal:      2113494436 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

/sbin/tuned-adm active

Current active profile: throughput-performance

From /etc/*release* /etc/*version*

```
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.3 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.3"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga
```

uname -a:

```
Linux r120i2m 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020 x86_64 x86_64
x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120i-2M (Intel Xeon Gold 5315Y)

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

SPECspeed®2017_int_base = 11.1

SPECspeed®2017_int_peak = 11.4

Test Date: Aug-2021

Hardware Availability: Jul-2021

Software Availability: Dec-2020

Platform Notes (Continued)

CVE-2018-3639 (Speculative Store Bypass):

Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swapgs barriers and __user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort):

Not affected

run-level 3 Aug 16 08:54

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	ext4	724G	106G	582G	16%	/

From /sys/devices/virtual/dmi/id

Vendor:	NEC
Product:	Express5800/R120i-2M
Product Family:	Express5800
Serial:	CN705114NH

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

32x Hynix HMAA8GR7AJR4N-XN 64 GB 2 rank 3200, configured at 2933

BIOS:

BIOS Vendor:	NEC
BIOS Version:	U46
BIOS Date:	04/28/2021
BIOS Revision:	1.40
Firmware Revision:	2.44

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C      | 600.perlbench_s(peak)
-----
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
 64, Version 2021.1 Build 20201112_000000
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120i-2M (Intel Xeon Gold 5315Y)

SPECspeed®2017_int_base = 11.1

SPECspeed®2017_int_peak = 11.4

CPU2017 License: 9006

Test Date: Aug-2021

Test Sponsor: NEC Corporation

Hardware Availability: Jul-2021

Tested by: NEC Corporation

Software Availability: Dec-2020

Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====
C      | 600.perlbench_s(base) 602.gcc_s(base, peak) 605.mcf_s(base, peak)
      | 625.x264_s(base, peak) 657.xz_s(base, peak)
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
```

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====
C      | 600.perlbench_s(peak)
```

```
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
```

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====
C      | 600.perlbench_s(base) 602.gcc_s(base, peak) 605.mcf_s(base, peak)
      | 625.x264_s(base, peak) 657.xz_s(base, peak)
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
```

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)
      | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
```

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====
Fortran | 648.exchange2_s(base, peak)
```

```
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
```

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120i-2M (Intel Xeon Gold 5315Y)

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

SPECspeed®2017_int_base = 11.1

SPECspeed®2017_int_peak = 11.4

Test Date: Aug-2021

Hardware Availability: Jul-2021

Software Availability: Dec-2020

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-DSPEC_OPENMP -std=c11 -m64 -fopenmp -Wl,-z,muldefs -xCORE-AVX512
-O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:

-DSPEC_OPENMP -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin/
-lqkalloc

Fortran benchmarks:

-m64 -xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120i-2M (Intel Xeon Gold 5315Y)

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

SPECspeed®2017_int_base = 11.1

SPECspeed®2017_int_peak = 11.4

Test Date: Aug-2021

Hardware Availability: Jul-2021

Software Availability: Dec-2020

Peak Compiler Invocation

C benchmarks (except as noted below):

icx

600.perlbench_s: icc

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.propdata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

605.mcf_s: basepeak = yes

625.x264_s: -DSPEC_OPENMP -fopenmp -std=c11 -m64 -Wl,-z,muldefs
-xCORE-AVX512 -flto -O3 -ffast-math
-qopt-mem-layout-trans=4 -fno-alias
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

657.xz_s: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120i-2M (Intel Xeon Gold 5315Y)

SPECspeed®2017_int_base = 11.1

SPECspeed®2017_int_peak = 11.4

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Aug-2021

Hardware Availability: Jul-2021

Software Availability: Dec-2020

Peak Optimization Flags (Continued)

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R120i-RevE.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R120i-RevE.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-08-15 20:00:17-0400.

Report generated on 2023-03-02 11:16:56 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-28.