



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 997

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

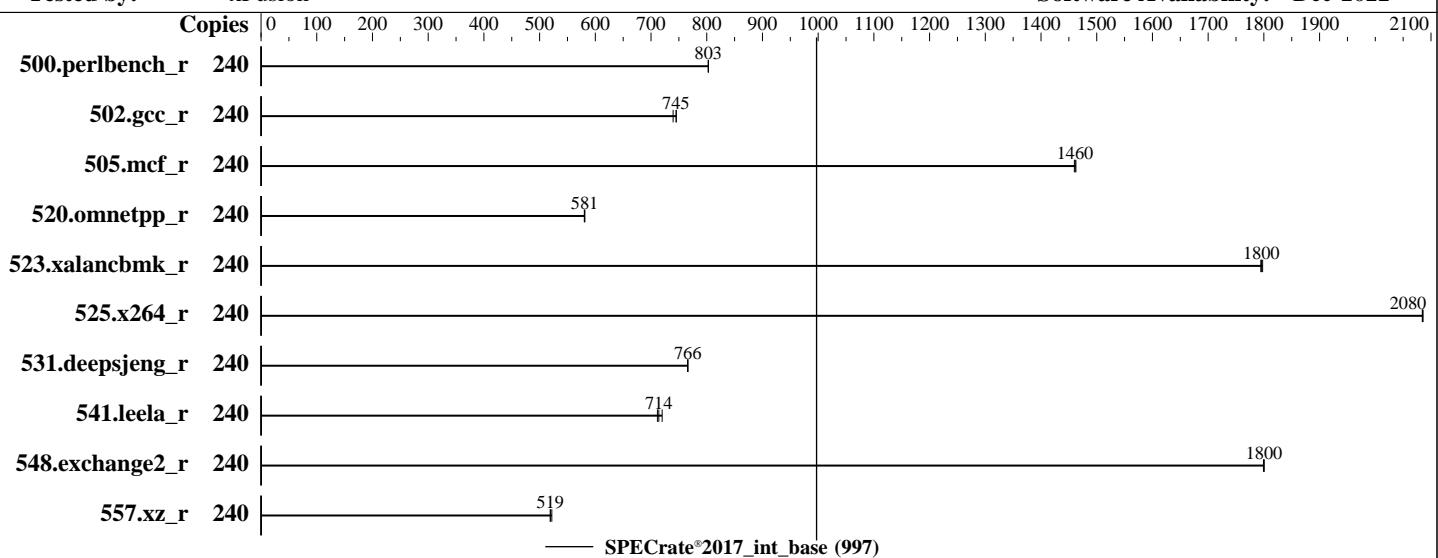

Hardware

CPU Name: Intel Xeon Platinum 8490H
Max MHz: 3500
Nominal: 1900
Enabled: 120 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 112.5 MB I+D on chip per chip
Other: None
Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)
Storage: 1 x 1920 GB SATA SSD
Other: None

OS:

Red Hat Enterprise Linux release 9.0 (Plow)

5.14.0-70.13.1.el9_0.x86_64

C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;

Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;

No

Version 2.00.35 Released Nov-2022

xfs

Run level 3 (multi-user)

64-bit

Not Applicable

None

Power Management: BIOS and OS set to prefer performance at the cost of additional power usage

Software



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 997

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: Jan-2023

Test Sponsor: xFusion

Hardware Availability: Jan-2023

Tested by: xFusion

Software Availability: Dec-2022

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	240	476	803	476	803	476	803									
502.gcc_r	240	456	745	459	740	456	745									
505.mcf_r	240	265	1460	266	1460	265	1460									
520.omnetpp_r	240	543	580	542	581	542	581									
523.xalancbmk_r	240	141	1800	141	1790	141	1800									
525.x264_r	240	202	2080	201	2090	202	2080									
531.deepsjeng_r	240	359	766	359	766	359	766									
541.leela_r	240	552	720	557	714	559	711									
548.exchange2_r	240	349	1800	349	1800	349	1800									
557.xz_r	240	497	522	499	519	499	519									

SPECrate®2017_int_base = 997

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/opt/intel/oneapi/compiler/2023.0.0/linux/compiler/lib/intel64:/opt/intel/oneapi/compiler/2023.0.0/linux/compiler/lib/ia32:/home/cpu2017-2023.0.0/je5.0.1-32"
MALLOC_CONF = "retain:true"
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V7 (Intel Xeon Platinum 8490H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_int_base = 997

SPECrate®2017_int_peak = Not Run

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

General Notes

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Performance Profile Set to Performance

SNC Set to Enable SNC4 (4-clusters)

```
Sysinfo program /home/cpu2017-2023.0.0/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Tue Jan 31 12:04:07 2023
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8490H
  2 "physical id"s (chips)
  240 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 60
  siblings : 120
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55 56 57 58 59
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55 56 57 58 59
```

From lscpu from util-linux 2.37.4:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	46 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	240
On-line CPU(s) list:	0-239
Vendor ID:	GenuineIntel
BIOS Vendor ID:	Intel(R) Corporation
Model name:	Intel(R) Xeon(R) Platinum 8490H
BIOS Model name:	Intel(R) Xeon(R) Platinum 8490H
CPU family:	6
Model:	143
Thread(s) per core:	2
Core(s) per socket:	60
Socket(s):	2
Stepping:	8

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 997

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: Jan-2023

Test Sponsor: xFusion

Hardware Availability: Jan-2023

Tested by: xFusion

Software Availability: Dec-2022

Platform Notes (Continued)

```
BogoMIPS: 3800.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mttr
pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xttopology
nonstop_tsc cpuid aperfmpf perf tsc_known_freq pni pclmulqdq dtes64 ds_cpl vmx smx est
tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
epb cat_13 cat_12 cdp_13 invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp
ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmil
avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsaves xgetbv1
xsaves cqmm_llc cqmm_occup_llc cqmm_mbmm_total cqmm_mbmm_local split_lock_detect avx_vnni
avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke waitpkg
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lll arch_capabilities
Virtualization: VT-x
L1d cache: 5.6 MiB (120 instances)
L1i cache: 3.8 MiB (120 instances)
L2 cache: 240 MiB (120 instances)
L3 cache: 225 MiB (2 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-14,120-134
NUMA node1 CPU(s): 15-29,135-149
NUMA node2 CPU(s): 30-44,150-164
NUMA node3 CPU(s): 45-59,165-179
NUMA node4 CPU(s): 60-74,180-194
NUMA node5 CPU(s): 75-89,195-209
NUMA node6 CPU(s): 90-104,210-224
NUMA node7 CPU(s): 105-119,225-239
Vulnerability Itlb multihit: Not affected
Vulnerability Llft: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

```
From lscpu --cache:
  NAME ONE-SIZE ALL-SIZE WAYS TYPE      LEVEL    SETS PHY-LINE COHERENCY-SIZE
  L1d     48K      5.6M   12 Data        1       64      1          64
  L1i     32K      3.8M    8 Instruction  1       64      1          64
  L2      2M       240M   16 Unified      2      2048      1          64
  L3    112.5M    225M   15 Unified      3     122880      1          64
```

```
/proc/cpuinfo cache data
cache size : 115200 KB
```

```
From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 120 121 122 123 124 125 126 127 128 129
130 131 132 133 134
node 0 size: 63530 MB
node 0 free: 63036 MB
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V7 (Intel Xeon Platinum 8490H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_int_base = 997

SPECrate®2017_int_peak = Not Run

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```
node 1 cpus: 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 135 136 137 138 139 140 141  
142 143 144 145 146 147 148 149  
node 1 size: 64505 MB  
node 1 free: 63723 MB  
node 2 cpus: 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 150 151 152 153 154 155 156  
157 158 159 160 161 162 163 164  
node 2 size: 64505 MB  
node 2 free: 60036 MB  
node 3 cpus: 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 165 166 167 168 169 170 171  
172 173 174 175 176 177 178 179  
node 3 size: 64505 MB  
node 3 free: 64179 MB  
node 4 cpus: 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 180 181 182 183 184 185 186  
187 188 189 190 191 192 193 194  
node 4 size: 64505 MB  
node 4 free: 64226 MB  
node 5 cpus: 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 195 196 197 198 199 200 201  
202 203 204 205 206 207 208 209  
node 5 size: 64505 MB  
node 5 free: 64053 MB  
node 6 cpus: 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 210 211 212 213 214 215  
216 217 218 219 220 221 222 223 224  
node 6 size: 64505 MB  
node 6 free: 60806 MB  
node 7 cpus: 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 225 226 227  
228 229 230 231 232 233 234 235 236 237 238 239  
node 7 size: 64485 MB  
node 7 free: 64143 MB  
node distances:  
node 0 1 2 3 4 5 6 7  
0: 10 12 12 12 21 21 21 21  
1: 12 10 12 12 21 21 21 21  
2: 12 12 10 12 21 21 21 21  
3: 12 12 12 10 21 21 21 21  
4: 21 21 21 10 12 12 12 12  
5: 21 21 21 12 10 12 12 12  
6: 21 21 21 12 12 10 12 10  
7: 21 21 21 21 12 12 12 10
```

```
From /proc/meminfo  
MemTotal: 527411080 kB  
HugePages_Total: 0  
Hugepagesize: 2048 kB
```

```
/sbin/tuned-adm active  
Current active profile: throughput-performance
```

```
From /etc/*release* /etc/*version*  
os-release:  
  NAME="Red Hat Enterprise Linux"  
  VERSION="9.0 (Plow)"  
  ID="rhel"  
  ID_LIKE="fedora"  
  VERSION_ID="9.0"  
  PLATFORM_ID="platform:el9"  
  PRETTY_NAME="Red Hat Enterprise Linux 9.0 (Plow)"  
  ANSI_COLOR="0;31"  
redhat-release: Red Hat Enterprise Linux release 9.0 (Plow)  
system-release: Red Hat Enterprise Linux release 9.0 (Plow)  
system-release-cpe: cpe:/o:redhat:enterprise_linux:9::baseos
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V7 (Intel Xeon Platinum 8490H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_int_base = 997

SPECrate®2017_int_peak = Not Run

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```
uname -a:  
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14  
12:42:38 EDT 2022 x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Jan 31 12:01

```
SPEC is set to: /home/cpu2017-2023.0.0  
Filesystem           Type  Size  Used Avail Use% Mounted on  
/dev/mapper/rhel-home xfs   1.7T  44G  1.7T   3% /home
```

```
From /sys/devices/virtual/dmi/id  
Vendor:          XFUSION  
Product:         2288H V7  
Product Family: Eagle Stream  
Serial:          2106182101X3N8000003
```

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The "dmidecode" program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
16x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800

BIOS:
BIOS Vendor: XFUSION
BIOS Version: 2.00.35
BIOS Date: 11/30/2022
BIOS Revision: 0.35

(End of data from sysinfo program)

Compiler Version Notes

```
=====| 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
```

```
-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----
```

```
=====| 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V7 (Intel Xeon Platinum 8490H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_int_base = 997

SPECrate®2017_int_peak = Not Run

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-fsto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V7 (Intel Xeon Platinum 8490H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_int_base = 997

SPECrate®2017_int_peak = Not Run

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2023.0.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/opt/intel/oneapi/compiler/2023.0.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revC.html
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.0-revB.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revC.xml
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.0-revB.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2023-01-30 23:04:07-0500.

Report generated on 2024-01-29 17:23:11 by CPU2017 PDF formatter v6716.

Originally published on 2023-02-28.