SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

D54Q-2U (Intel Xeon Platinum 8480+, 2.0GHz)

SPECrate®2017_fp_base = 909

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9050
Test Sponsor: Quanta Computer Inc.
Tested by: Quanta Computer Inc.

Test Date: Jan-2023
Hardware Availability: Nov-2022
Software Availability: Aug-2022

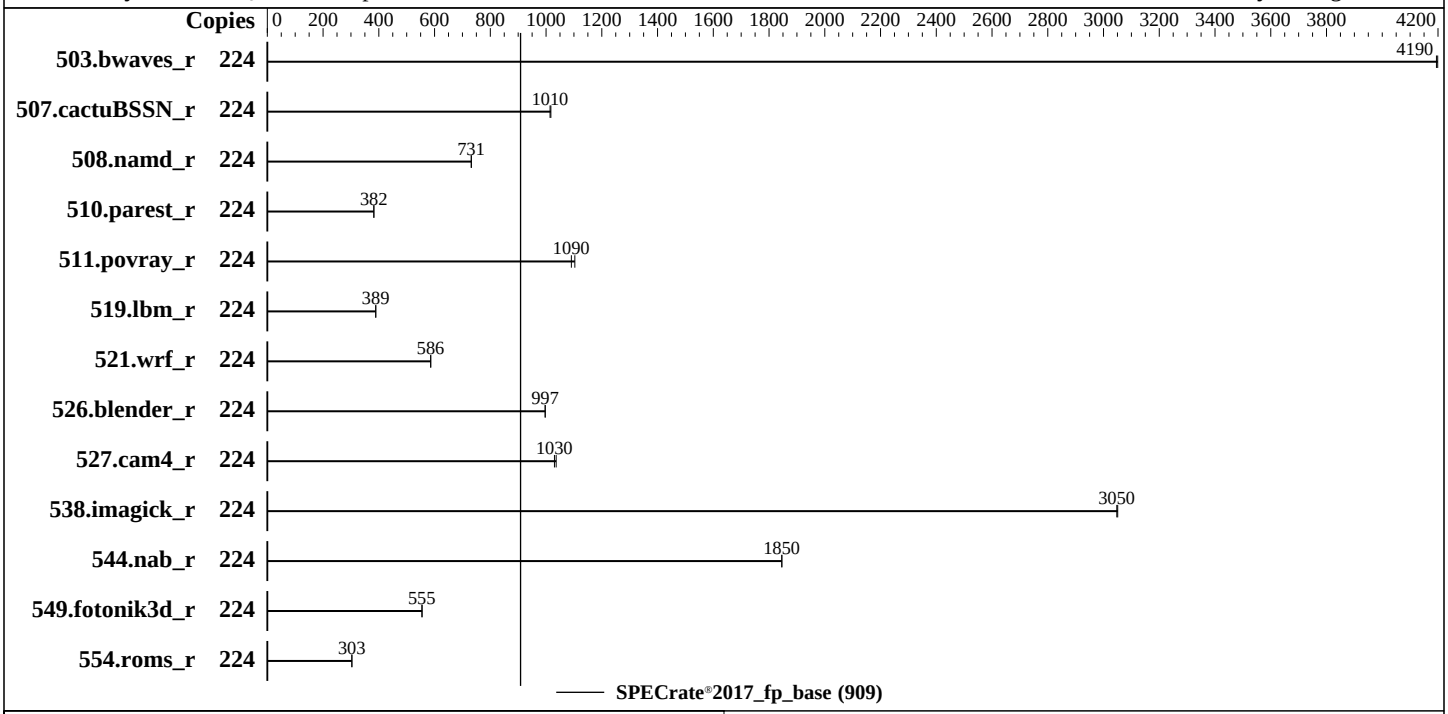

Hardware

CPU Name:	Intel Xeon Platinum 8480+
Max MHz:	3800
Nominal:	2000
Enabled:	112 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	105 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 7.68 TB PCIe 4.0x4 NVMe SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux release 9.0 (Plow) Kernel 5.14.0-70.22.1.el9_0.x86_64
Compiler:	C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 3A11 released Dec-2022
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

D54Q-2U (Intel Xeon Platinum 8480+, 2.0GHz)

SPECrate®2017_fp_base = 909

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9050
Test Sponsor: Quanta Computer Inc.
Tested by: Quanta Computer Inc.

Test Date: Jan-2023
Hardware Availability: Nov-2022
Software Availability: Aug-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	224	**536**	**4190**	535	4200									
507.cactuBSSN_r	224	279	1020	**280**	**1010**									
508.namd_r	224	291	732	**291**	**731**									
510.parest_r	224	**1533**	**382**	1533	382									
511.povray_r	224	474	1100	**480**	**1090**									
519.lbm_r	224	**607**	**389**	607	389									
521.wrf_r	224	856	586	**856**	**586**									
526.blender_r	224	**342**	**997**	342	997									
527.cam4_r	224	**380**	**1030**	378	1040									
538.imagick_r	224	183	3050	**183**	**3050**									
544.nab_r	224	204	1850	**204**	**1850**									
549.fotonik3d_r	224	1572	555	**1574**	**555**									
554.roms_r	224	**1174**	**303**	1173	303									

SPECrate®2017_fp_base = 909

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/root/cpu2017/lib/intel64:/root/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
```

(Continued on next page)

General Notes (Continued)

```
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
 NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
 is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Configuration
Intel VT for Directed I/O set to Disabled
Patrol Scrub set to Disabled
SNC set to SNC4
Hardware P-States set to Disable

 Sysinfo program /root/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost.localdomain Sun Feb 12 07:51:19 2023

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 250 (250-6.el9_0)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
```

(Continued on next page)

Platform Notes (Continued)

```
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
------------------------------------------------------------

------------------------------------------------------------
 1. uname -a
   Linux localhost.localdomain 5.14.0-70.22.1.el9_0.x86_64 #1 SMP PREEMPT Tue Aug 2 10:02:12 EDT 2022 x86_64
    x86_64 x86_64 GNU/Linux

------------------------------------------------------------
 2. w
     07:51:19 up  4:48,  1 user,  load average: 138.21, 201.49, 215.52
   USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT
   root     tty1      03:03    4:48m  1.05s  0.09s /bin/bash ./S6Qtest.sh

------------------------------------------------------------
 3. Username
   From environment variable $USER:  root

------------------------------------------------------------
 4. ulimit -a
   real-time non-blocking time  (microseconds, -R) unlimited
   core file size              (blocks, -c) 0
   data seg size               (kbytes, -d) unlimited
   scheduling priority                 (-e) 0
   file size                   (blocks, -f) unlimited
   pending signals                     (-i) 4124181
   max locked memory           (kbytes, -l) unlimited
   max memory size             (kbytes, -m) unlimited
   open files                          (-n) 1024
   pipe size                (512 bytes, -p) 8
   POSIX message queues         (bytes, -q) 819200
   real-time priority                  (-r) 0
   stack size                  (kbytes, -s) unlimited
   cpu time                   (seconds, -t) unlimited
   max user processes                  (-u) 4124181
   virtual memory              (kbytes, -v) unlimited
   file locks                          (-x) unlimited

------------------------------------------------------------
 5. sysinfo process ancestry
  /usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
  login -- root
```

(Continued on next page)

Platform Notes (Continued)

```
 -bash
 /bin/bash ./S6Qtest.sh
 /bin/bash ./S6Qtest.sh
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=224 -c
   ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=112 --define physicalfirst
    --define invoke_with_interleave --define drop_caches --tune base -o all fprate -n 2
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=224 --configfile
   ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=112 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base --output_format all --iterations 2
   --nopower --runmode rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
    $SPEC/tmp/CPU2017.023/templogs/preenv.fprate.023.0.log --lognum 023.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /root/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Platinum 8480+
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
    stepping        : 8
    microcode       : 0x2b000111
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 56
    siblings        : 112
    2 physical ids (chips)
    224 processors (hardware threads)
    physical id 0: core ids 0-55
    physical id 1: core ids 0-55
    physical id 0: apicids 0-111
    physical id 1: apicids 128-239
 Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   52 bits physical, 57 bits virtual
  Byte Order:                      Little Endian
  CPU(s):                          224
  On-line CPU(s) list:             0-223
  Vendor ID:                       GenuineIntel
  BIOS Vendor ID:                  Intel(R) Corporation
  Model name:                      Intel(R) Xeon(R) Platinum 8480+
```

(Continued on next page)

Platform Notes (Continued)

```
   BIOS Model name:                      Intel(R) Xeon(R) Platinum 8480+
   CPU family:                           6
   Model:                                143
   Thread(s) per core:                   2
   Core(s) per socket:                   56
   Socket(s):                            2
   Stepping:                             8
   Frequency boost:                      enabled
   CPU max MHz:                          2001.0000
   CPU min MHz:                          800.0000
   BogoMIPS:                             4000.00
   Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                         clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                         lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                         nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                         ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                         sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                         lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                         invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                                         tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2
                                         smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                         avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                                         xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                         cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                         arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                                         vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                                         bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                                         tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
   Virtualization:                       VT-x
   L1d cache:                            5.3 MiB (112 instances)
   L1i cache:                            3.5 MiB (112 instances)
   L2 cache:                             224 MiB (112 instances)
   L3 cache:                             210 MiB (2 instances)
   NUMA node(s):                         8
   NUMA node0 CPU(s):                    0-13,112-125
   NUMA node1 CPU(s):                    14-27,126-139
   NUMA node2 CPU(s):                    28-41,140-153
   NUMA node3 CPU(s):                    42-55,154-167
   NUMA node4 CPU(s):                    56-69,168-181
   NUMA node5 CPU(s):                    70-83,182-195
   NUMA node6 CPU(s):                    84-97,196-209
   NUMA node7 CPU(s):                    98-111,210-223
   Vulnerability Itlb multihit:          Not affected
   Vulnerability L1tf:                   Not affected
   Vulnerability Mds:                    Not affected
   Vulnerability Meltdown:               Not affected
   Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Spectre v1:       Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:       Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
  Vulnerability Srbds:            Not affected
  Vulnerability Tsx async abort:  Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     5.3M   12 Data            1     64        1             64
     L1i       32K     3.5M    8 Instruction     1     64        1             64
     L2         2M     224M   16 Unified         2   2048        1             64
     L3       105M     210M   15 Unified         3 114688        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0-13,112-125
  node 0 size: 128033 MB
  node 0 free: 126453 MB
  node 1 cpus: 14-27,126-139
  node 1 size: 128981 MB
  node 1 free: 127924 MB
  node 2 cpus: 28-41,140-153
  node 2 size: 129017 MB
  node 2 free: 127958 MB
  node 3 cpus: 42-55,154-167
  node 3 size: 129017 MB
  node 3 free: 127942 MB
  node 4 cpus: 56-69,168-181
  node 4 size: 129017 MB
  node 4 free: 127897 MB
  node 5 cpus: 70-83,182-195
  node 5 size: 129017 MB
  node 5 free: 127960 MB
  node 6 cpus: 84-97,196-209
  node 6 size: 129017 MB
  node 6 free: 127954 MB
  node 7 cpus: 98-111,210-223
  node 7 size: 128998 MB
  node 7 free: 127949 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  12  12  12  21  21  21  21
    1:  12  10  12  12  21  21  21  21
    2:  12  12  10  12  21  21  21  21
    3:  12  12  12  10  21  21  21  21
    4:  21  21  21  21  10  12  12  12
```

(Continued on next page)

Platform Notes (Continued)

```
     5:  21  21  21  21  12  10  12  12
     6:  21  21  21  21  12  12  10  12
     7:  21  21  21  21  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1055849740 kB

------------------------------------------------------------
10. who -r
  run-level 3 Feb 12 03:03

------------------------------------------------------------
11. Systemd service manager version: systemd 250 (250-6.el9_0)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE             UNIT FILES
  enabled           ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
                    accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker gdm
                    getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt
                    low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
                    nvmefc-boot-connections ostree-remount power-profiles-daemon qemu-guest-agent rhsmcertd
                    rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control
                    systemd-network-generator udisks2 upower vgauthd vmtoolsd
  enabled-runtime   rc-local systemd-remount-fs
  disabled          arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
                    canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
                    dbus-daemon debug-shell dnsmasq firewalld gssproxy iprdump iprinit iprupdate ipsec iscsid
                    iscsiuio kpatch kvm_stat ledmon man-db-restart-cache-update nfs-blkmap nfs-server nftables
                    nvmf-autoconnect podman podman-auto-update podman-restart psacct ras-mc-ctl rasdaemon
                    rdisc rhcd rhsm rhsm-facts rpmdb-rebuild serial-getty@ speech-dispatcherd sshd-keygen@
                    systemd-boot-check-no-failures systemd-pstore systemd-sysext wpa_supplicant
  indirect          spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd4,gpt2)/vmlinuz-5.14.0-70.22.1.el9_0.x86_64
  root=UUID=3224807a-bb12-4011-9c08-e4342403c547
  ro
  crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
  resume=UUID=ffab002c-001d-4ca9-b552-95895861c71a
  nomodeset
  rhgb
  quiet
```

(Continued on next page)

Platform Notes (Continued)

```
  selinux=0
  default_hugepagesz=1G
  hugepagesz=1G

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 2.00 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
```

(Continued on next page)

Platform Notes (Continued)

```
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 9.0 (Plow)
  redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
  system-release Red Hat Enterprise Linux release 9.0 (Plow)

------------------------------------------------------------
19. Disk information
SPEC is set to: /root/cpu2017
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme0n1p6 xfs   310G   21G  290G   7% /

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         Quanta Cloud Technology Inc.
    Product:        QuantaGrid D54Q-2U

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    16x Micron MTC40F2046S1RC48BA1 64 GB 2 rank 4800


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       American Megatrends International, LLC.
   BIOS Version:      3A11
   BIOS Date:         12/02/2022
   BIOS Revision:     5.29
   Firmware Revision: 3.8
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char

(Continued on next page)

Base Portability Flags (Continued)

527.cam4_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG`
538.imagick_r: `-DSPEC_LP64`
544.nab_r: `-DSPEC_LP64`
549.fotonik3d_r: `-DSPEC_LP64`
554.roms_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
`-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

C++ benchmarks:
`-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Fortran benchmarks:
`-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using both Fortran and C:
`-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using both C and C++:
`-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using Fortran, C, and C++:
`-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html
http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-Eagle_Stream-Platform-Settings-V1.0.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml
http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-Eagle_Stream-Platform-Settings-V1.0.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-02-11 18:51:19-0500.
Report generated on 2023-03-02 11:27:29 by CPU2017 PS formatter v6442.
Originally published on 2023-02-28.