SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-211E-FRDN2T
(X13SEM-TF , Intel Xeon Platinum 8490H)

SPECspeed®2017_int_base = 13.7

SPECspeed®2017_int_peak = 14.0

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

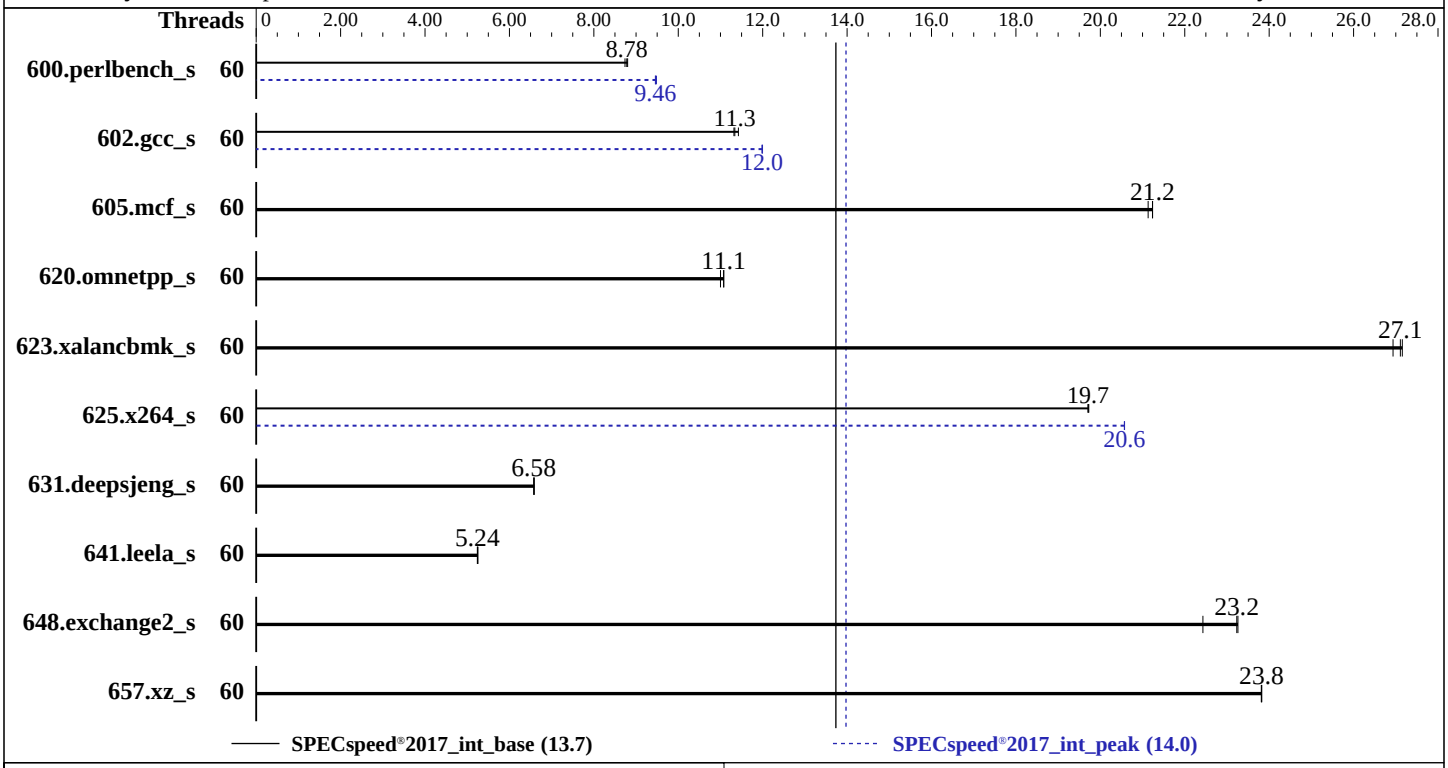

Hardware

CPU Name:	Intel Xeon Platinum 8490H
Max MHz:	3500
Nominal:	1900
Enabled:	60 cores, 1 chip
Orderable:	1 chip
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	112.5 MB I+D on chip per chip
Other:	None
Memory:	512 GB (8 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 600 GB SATA III SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default
Compiler:	C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.0 of Intel Fortran Compiler for Linux; C/C++: Version 2023.0 of Intel C/C++ Compiler for Linux
Parallel:	Yes
Firmware:	Version 1.1 released Jan-2023
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-211E-FRDN2T
(X13SEM-TF , Intel Xeon Platinum 8490H)

SPECspeed®2017_int_base = 13.7

SPECspeed®2017_int_peak = 14.0

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	60	203	8.74	**202**	**8.78**	202	8.80	60	187	9.48	188	9.46	**188**	**9.46**
602.gcc_s	60	**351**	**11.3**	349	11.4	352	11.3	60	332	12.0	332	12.0	**332**	**12.0**
605.mcf_s	60	222	21.2	223	21.1	**222**	**21.2**	60	222	21.2	223	21.1	**222**	**21.2**
620.omnetpp_s	60	148	11.0	147	11.1	**147**	**11.1**	60	148	11.0	147	11.1	**147**	**11.1**
623.xalancbmk_s	60	52.2	27.2	52.6	26.9	**52.3**	**27.1**	60	52.2	27.2	52.6	26.9	**52.3**	**27.1**
625.x264_s	60	**89.5**	**19.7**	89.4	19.7	89.5	19.7	60	85.8	20.6	**85.7**	**20.6**	85.7	20.6
631.deepsjeng_s	60	218	6.58	218	6.59	**218**	**6.58**	60	218	6.58	218	6.59	**218**	**6.58**
641.leela_s	60	**325**	**5.24**	325	5.25	326	5.24	60	**325**	**5.24**	325	5.25	326	5.24
648.exchange2_s	60	131	22.4	126	23.3	**127**	**23.2**	60	131	22.4	126	23.3	**127**	**23.2**
657.xz_s	60	**260**	**23.8**	260	23.8	259	23.8	60	**260**	**23.8**	260	23.8	259	23.8

SPECspeed®2017_int_base = **13.7**

SPECspeed®2017_int_peak = **14.0**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
SPEC has ruled that the compiler used for this result was performing a compilation
that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s
benchmarks using a priori knowledge of the SPEC code and dataset to perform a
transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4
https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer
publish results using this optimization.

This result is left in the SPEC results database for historical reference.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/root/cpu2017-1.1.9-2/lib/intel64:/root/cpu2017-1.1.9-2/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
```

(Continued on next page)

General Notes (Continued)

```
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the
system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the
system as tested and documented.
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the
system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Settings:
Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Performance
SNC = Enable SNC4 (4-Clusters)
KTI Prefetch = Enable
LLC Dead Line Alloc = Disable
DCU Streamer Prefetcher = Disable
Hyper-Threading [ALL] = Disable

 Sysinfo program /root/cpu2017-1.1.9-2/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on 139-164 Sat Feb 11 15:14:43 2023

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
```

(Continued on next page)

Platform Notes (Continued)

```
  Linux 139-164 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   15:14:43 up 1 day,  5:12,  1 user,  load average: 0.02, 0.04, 0.00
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                07:40    2.00s  1.07s  0.01s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 2062517
  max locked memory       (kbytes, -l) 64
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 2062517
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 30
 login -- root
 -bash
 -bash
 runcpu --nobuild --action validate --define default-platform-flags -c
   ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=60 --tune base,peak -o all --define
   intspeedaffinity --define drop_caches intspeed
 runcpu --nobuild --action validate --define default-platform-flags --configfile
   ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=60 --tune base,peak --output_format all
   --define intspeedaffinity --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed
   intspeed --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.016/templogs/preenv.intspeed.016.0.log
   --lognum 016.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /root/cpu2017-1.1.9-2

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Platinum 8490H
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
    stepping        : 6
    microcode       : 0x2b000161
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 60
    siblings        : 60
```

(Continued on next page)

Platform Notes (Continued)

```
    1 physical ids (chips)
    60 processors (hardware threads)
    physical id 0: core ids 0-59
    physical id 0: apicids
    0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
    ,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.2:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   46 bits physical, 57 bits virtual
  Byte Order:                      Little Endian
  CPU(s):                          60
  On-line CPU(s) list:             0-59
  Vendor ID:                       GenuineIntel
  Model name:                      Intel(R) Xeon(R) Platinum 8490H
  CPU family:                      6
  Model:                           143
  Thread(s) per core:              1
  Core(s) per socket:              60
  Socket(s):                       1
  Stepping:                        6
  Frequency boost:                 enabled
  CPU max MHz:                     1901.0000
  CPU min MHz:                     800.0000
  BogoMIPS:                        3800.00
  Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                   clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                   lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                   nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                   ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                   sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                   lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                   invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                                   vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                                   bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                                   avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                                   xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                   cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                   arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                                   vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                                   bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                                   tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
  Virtualization:                  VT-x
  L1d cache:                       2.8 MiB (60 instances)
  L1i cache:                       1.9 MiB (60 instances)
  L2 cache:                        120 MiB (60 instances)
  L3 cache:                        112.5 MiB (1 instance)
  NUMA node(s):                    4
  NUMA node0 CPU(s):               0-14
  NUMA node1 CPU(s):               15-29
  NUMA node2 CPU(s):               30-44
  NUMA node3 CPU(s):               45-59
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Mds:                Not affected
  Vulnerability Meltdown:           Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
  Vulnerability Spectre v1:         Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:         Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
  Vulnerability Srbds:              Not affected
  Vulnerability Tsx async abort:    Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     2.8M   12 Data            1     64        1             64
     L1i       32K     1.9M    8 Instruction     1     64        1             64
     L2         2M     120M   16 Unified         2   2048        1             64
     L3     112.5M   112.5M   15 Unified         3 122880        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-14
  node 0 size: 128656 MB
  node 0 free: 127760 MB
  node 1 cpus: 15-29
  node 1 size: 128985 MB
  node 1 free: 128844 MB
  node 2 cpus: 30-44
  node 2 size: 129020 MB
  node 2 free: 120128 MB
  node 3 cpus: 45-59
  node 3 size: 128991 MB
  node 3 free: 128734 MB
  node distances:
  node   0   1   2   3
    0:  10  12  12  12
    1:  12  10  12  12
    2:  12  12  10  12
    3:  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       528029332 kB

------------------------------------------------------------
10. who -r
  run-level 3 Feb 10 10:02

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage auditd cron display-manager getty@ haveged irqbalance
                   issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog
                   smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         apparmor autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates
                   chrony-wait chronyd console-getty cups cups-browsed debug-shell ebtables
```

(Continued on next page)

Platform Notes (Continued)

```
                  exchange-bmc-os-info firewalld gpm grub2-once haveged-switch-root ipmi ipmievd
                  issue-add-ssh-keys kexec-load lunmask man-db-create multipathd munge nfs nfs-blkmap
                  ntp-wait ntpd rdisc rpcbind rpmconfigcheck rsyncd salt-minion serial-getty@ slurmd
                  smartd_generate_opts snmpd snmptrapd svnserve systemd-boot-check-no-failures
                  systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
                  ypbind
  indirect        wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
  root=UUID=2d678d2d-7c7c-4447-9a76-01d4d4bc98fa
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 1.90 GHz.
                    The governor "ondemand" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
```

(Continued on next page)

Platform Notes (Continued)

```
   max_ptes_none             511
   max_ptes_shared           256
   max_ptes_swap              64
   pages_to_scan            4096
   scan_sleep_millisecs    10000

 ------------------------------------------------------------
 18. OS release
   From /etc/*-release /etc/*-version
   os-release SUSE Linux Enterprise Server 15 SP4

 ------------------------------------------------------------
 19. Disk information
 SPEC is set to: /root/cpu2017-1.1.9-2
   Filesystem     Type   Size  Used Avail Use% Mounted on
   /dev/sda2      btrfs  559G  444G  116G  80% /root

 ------------------------------------------------------------
 20. /sys/devices/virtual/dmi/id
     Vendor:          Supermicro
     Product:         Super Server
     Product Family: Family
     Serial:          0123456789

 ------------------------------------------------------------
 21. dmidecode
   Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     8x Micron Technology MTC40F2046S1RC48BA1 64 GB 2 rank 4800


 ------------------------------------------------------------
 22. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       American Megatrends International, LLC.
    BIOS Version:      1.1
    BIOS Date:         01/20/2023
    BIOS Revision:     5.29
```

Compiler Version Notes

```
==============================================================================================================
C       | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
        | 657.xz_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
        | 641.leela_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================================================
Fortran | 648.exchange2_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:
-m64 -std=c++14 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks:
-m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

(Continued on next page)

Peak Optimization Flags (Continued)

605.mcf_s: `basepeak = yes`

625.x264_s: `-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

657.xz_s: `basepeak = yes`

C++ benchmarks:

620.omnetpp_s: `basepeak = yes`

623.xalancbmk_s: `basepeak = yes`

631.deepsjeng_s: `basepeak = yes`

641.leela_s: `basepeak = yes`

Fortran benchmarks:

648.exchange2_s: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html`
`http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml`
`http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-02-11 18:14:42-0500.
Report generated on 2024-01-29 17:24:50 by CPU2017 PS formatter v6716.
Originally published on 2023-03-14.