SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.20 GHz, Intel Xeon Platinum 8352Y)

SPECrate®2017_fp_base = 514

SPECrate®2017_fp_peak = 541

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Feb-2023
Hardware Availability: Apr-2022
Software Availability: May-2022

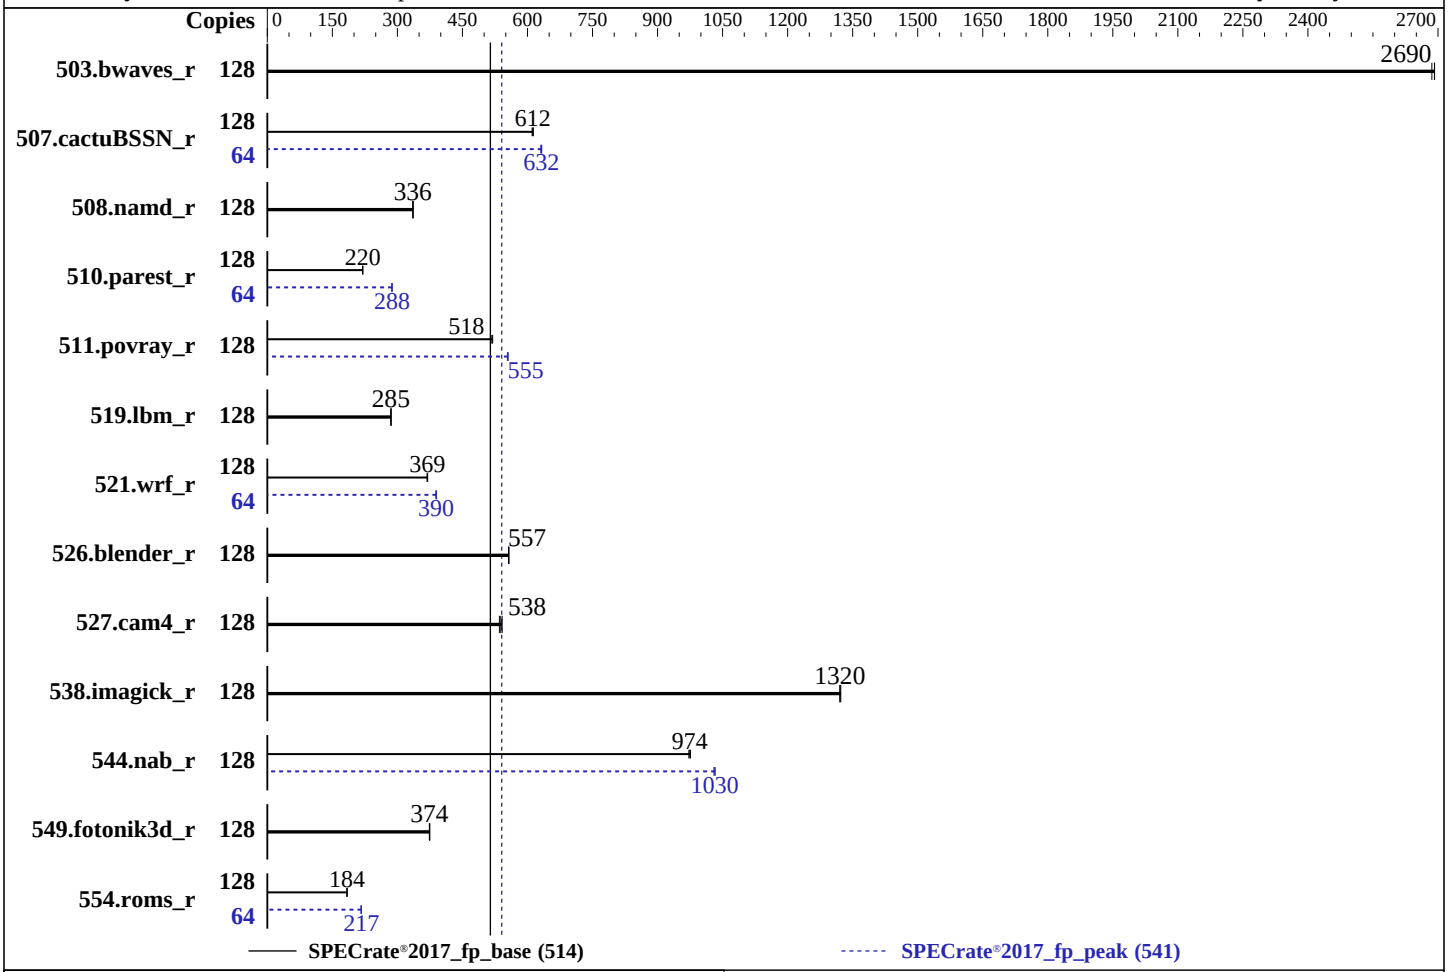

Hardware

CPU Name:	Intel Xeon Platinum 8352Y
Max MHz:	3400
Nominal:	2200
Enabled:	64 cores, 2 chips, 2 threads/core
Orderable:	1, 2 chip(s)
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1.25 MB I+D on chip per core
L3:	48 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)
Storage:	1 x 1 TB SATA SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux release 8.4 (Ootpa) 4.18.0-305.25.1.el8_4.x86_64
Compiler:	C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 0802 released Apr-2022
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.20 GHz, Intel Xeon Platinum 8352Y)

SPECrate®2017_fp_base = 514

SPECrate®2017_fp_peak = 541

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Feb-2023
Hardware Availability: Apr-2022
Software Availability: May-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	478	2690	**477**	**2690**	477	2690	128	478	2690	**477**	**2690**	477	2690
507.cactuBSSN_r	128	**265**	**612**	265	611	264	614	64	128	633	**128**	**632**	128	631
508.namd_r	128	**362**	**336**	362	336	362	336	128	**362**	**336**	362	336	362	336
510.parest_r	128	**1522**	**220**	1524	220	1520	220	64	583	287	582	288	**582**	**288**
511.povray_r	128	**577**	**518**	575	520	580	515	128	**539**	**555**	538	555	540	554
519.lbm_r	128	474	285	**473**	**285**	473	286	128	474	285	**473**	**285**	473	286
521.wrf_r	128	778	368	775	370	**776**	**369**	64	369	389	368	390	**368**	**390**
526.blender_r	128	350	557	**350**	**557**	350	556	128	350	557	**350**	**557**	350	556
527.cam4_r	128	413	541	**416**	**538**	418	535	128	413	541	**416**	**538**	418	535
538.imagick_r	128	241	1320	241	1320	**241**	**1320**	128	241	1320	241	1320	**241**	**1320**
544.nab_r	128	222	972	221	976	**221**	**974**	128	**209**	**1030**	209	1030	209	1030
549.fotonik3d_r	128	**1333**	**374**	1331	375	1335	374	128	**1333**	**374**	1331	375	1335	374
554.roms_r	128	**1105**	**184**	1105	184	1109	183	64	**469**	**217**	471	216	468	217

SPECrate®2017_fp_base = 514

SPECrate®2017_fp_peak = 541

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/ic22u1/lib/intel64:/home/ic22u1/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
```

(Continued on next page)

General Notes (Continued)

```
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Configuration:
VT-d = Disabled
Patrol Scrub = Disabled
SNC = Enable SNC2 (2-clusters)
Engine Boost = Aggressive
SR-IOV Support = Disabled
BMC Configuration:
Fan mode = Full speed mode

 Sysinfo program /home/ic22u1/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost.localdomain Tue Feb  7 17:17:33 2023

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 239 (239-45.el8_4.3)
```

(Continued on next page)

Platform Notes (Continued)

```
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
 21. Disk information
 22. /sys/devices/virtual/dmi/id
 23. dmidecode
 24. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost.localdomain 4.18.0-305.25.1.el8_4.x86_64 #1 SMP Mon Oct 18 14:34:11 EDT 2021 x86_64 x86_64
  x86_64 GNU/Linux

------------------------------------------------------------
2. w
   17:17:33 up  7:26,  1 user,  load average: 74.95, 114.49, 122.28
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                09:51    7:24m  1.27s  0.01s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) 0
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 4126642
  max locked memory       (kbytes, -l) 64
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 4126642
  virtual memory          (kbytes, -v) unlimited
```

(Continued on next page)

Platform Notes (Continued)

```
   file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 17
 login -- root
 -bash
 -bash
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c
   ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=64 --define physicalfirst
    --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile
   ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=64 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
    --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
    $SPEC/tmp/CPU2017.319/templogs/preenv.fprate.319.0.log --lognum 319.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/ic22u1

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Platinum 8352Y CPU @ 2.20GHz
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 106
    stepping        : 6
    microcode       : 0xd000331
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 32
    siblings        : 64
    2 physical ids (chips)
    128 processors (hardware threads)
    physical id 0: core ids 0-31
    physical id 1: core ids 0-31
    physical id 0: apicids 0-63
    physical id 1: apicids 128-191
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.32.1:
  Architecture:        x86_64
  CPU op-mode(s):      32-bit, 64-bit
  Byte Order:          Little Endian
  CPU(s):              128
```

(Continued on next page)

Platform Notes (Continued)

```
  On-line CPU(s) list: 0-127
  Thread(s) per core:  2
  Core(s) per socket:  32
  Socket(s):           2
  NUMA node(s):        4
  Vendor ID:           GenuineIntel
  BIOS Vendor ID:      Intel
  CPU family:          6
  Model:               106
  Model name:          Intel(R) Xeon(R) Platinum 8352Y CPU @ 2.20GHz
  BIOS Model name:     Intel(R) Xeon(R) Platinum 8352Y CPU @ 2.20GHz
  Stepping:            6
  CPU MHz:             800.068
  CPU max MHz:         3400.0000
  CPU min MHz:         800.0000
  BogoMIPS:            4400.00
  Virtualization:      VT-x
  L1d cache:           48K
  L1i cache:           32K
  L2 cache:            1280K
  L3 cache:            49152K
  NUMA node0 CPU(s):   0-15,64-79
  NUMA node1 CPU(s):   16-31,80-95
  NUMA node2 CPU(s):   32-47,96-111
  NUMA node3 CPU(s):   48-63,112-127
  Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts
                       acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art
                       arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf pni
                       pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca
                       sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                       abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single intel_ppin ssbd mba ibrs ibpb
                       stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust
                       bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                       avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                       xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                       wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi
                       umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                       avx512_vpopcntdq la57 rdpid fsrm md_clear pconfig flush_l1d arch_capabilities

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-15,64-79
  node 0 size: 257580 MB
  node 0 free: 240305 MB
  node 1 cpus: 16-31,80-95
```

(Continued on next page)

Platform Notes (Continued)

```
  node 1 size: 258040 MB
  node 1 free: 245398 MB
  node 2 cpus: 32-47,96-111
  node 2 size: 258040 MB
  node 2 free: 245644 MB
  node 3 cpus: 48-63,112-127
  node 3 size: 258038 MB
  node 3 free: 245585 MB
  node distances:
  node   0   1   2   3
    0:  10  11  20  20
    1:  11  10  20  20
    2:  20  20  10  11
    3:  20  20  11  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1056461372 kB

------------------------------------------------------------
10. who -r
  run-level 3 Feb 7 09:51

------------------------------------------------------------
11. Systemd service manager version: systemd 239 (239-45.el8_4.3)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE     UNIT FILES
  enabled   NetworkManager NetworkManager-dispatcher NetworkManager-wait-online atd auditd autovt@ chronyd
            crond firewalld getty@ import-state insights-client-boot irqbalance iscsi iscsi-onboot kdump
            libstoragemgmt lm_sensors loadmodules lvm2-monitor mcelog mdmonitor microcode multipathd
            nvmefc-boot-connections pmcd pmie pmlogger rhsmcertd rsyslog selinux-autorelabel-mark smartd sshd
            sssd syslog sysstat timedatex tuned udisks2 vdo
  disabled  arp-ethers blk-availability chrony-wait console-getty cpupower debug-shell ebtables fancontrol
            grafana-server iprdump iprinit iprupdate ipsec iscsid iscsiuio kpatch kvm_stat ledmon nftables
            nis-domainname nvmf-autoconnect oddjobd pmfind pmie_check pmlogger_check pmlogger_daily_report
            pmlogger_daily_report-poll pmproxy podman-auto-update postfix powertop psacct ras-mc-ctl
            rasdaemon rdisc rhcd rhsm rhsm-facts rrdcached saslauthd serial-getty@ sshd-keygen@
            systemd-resolved tcsd
  indirect  sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
  masked    systemd-timedated

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
```

(Continued on next page)

Platform Notes (Continued)

```
   BOOT_IMAGE=(hd0,gpt2)/vmlinuz-4.18.0-305.25.1.el8_4.x86_64
   root=/dev/mapper/rhel-root
   ro
   resume=/dev/mapper/rhel-swap
   rd.lvm.lv=rhel/root
   rd.lvm.lv=rhel/swap
   rhgb
   quiet

 ------------------------------------------------------------
 14. cpupower frequency-info
   analyzing CPU 0:
     current policy: frequency should be within 800 MHz and 3.40 GHz.
                     The governor "performance" may decide which speed to use
                     within this range.
     boost state support:
       Supported: yes
       Active: yes

 ------------------------------------------------------------
 15. tuned-adm active
   Current active profile: throughput-performance

 ------------------------------------------------------------
 16. sysctl
   kernel.numa_balancing               1
   kernel.randomize_va_space           2
   vm.compaction_proactiveness         0
   vm.dirty_background_bytes           0
   vm.dirty_background_ratio          10
   vm.dirty_bytes                      0
   vm.dirty_expire_centisecs        3000
   vm.dirty_ratio                     40
   vm.dirty_writeback_centisecs      500
   vm.dirtytime_expire_seconds     43200
   vm.extfrag_threshold              500
   vm.min_unmapped_ratio               1
   vm.nr_hugepages                     0
   vm.nr_hugepages_mempolicy           0
   vm.nr_overcommit_hugepages          0
   vm.swappiness                      10
   vm.watermark_boost_factor       15000
   vm.watermark_scale_factor          10
   vm.zone_reclaim_mode                0

 ------------------------------------------------------------
 17. /sys/kernel/mm/transparent_hugepage
```

(Continued on next page)

Platform Notes (Continued)

```
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 8.4 (Ootpa)
  redhat-release Red Hat Enterprise Linux release 8.4 (Ootpa)
  system-release Red Hat Enterprise Linux release 8.4 (Ootpa)

------------------------------------------------------------
20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
  itlb_multihit        Not affected
  l1tf                 Not affected
  mds                  Not affected
  meltdown             Not affected
  spec_store_bypass    Mitigation: Speculative Store Bypass disabled via prctl and seccomp
  spectre_v1           Mitigation: usercopy/swapgs barriers and __user pointer sanitization
  spectre_v2           Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
  srbds                Not affected
  tsx_async_abort      Not affected
For more information, see the Linux documentation on hardware vulnerabilities, for example
     https://www.kernel.org/doc/html/latest/admin-guide/hw-vuln/index.html

------------------------------------------------------------
21. Disk information
SPEC is set to: /home/ic22u1
  Filesystem            Type  Size  Used Avail Use% Mounted on
  /dev/mapper/rhel-home xfs   878G  170G  709G  20% /home

------------------------------------------------------------
22. /sys/devices/virtual/dmi/id
    Vendor:         ASUSTeK COMPUTER INC.
    Product:        RS720-E10-RS12
    Product Family: Server
    Serial:         012345678901
```

(Continued on next page)

Platform Notes (Continued)

```
 ------------------------------------------------------------
 23. dmidecode
  Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     16x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200


 ------------------------------------------------------------
 24. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       American Megatrends Inc.
    BIOS Version:      0802
    BIOS Date:         04/29/2022
    BIOS Revision:     8.2
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

(Continued on next page)

Base Compiler Invocation (Continued)

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks (continued):
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -qopt-zmm-usage=high -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

521.wrf_r: -w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)

Peak Optimization Flags (Continued)

527.cam4_r: `basepeak = yes`

Benchmarks using both C and C++:

511.povray_r: `-w -m64 -std=c11 -Wl,-z,muldefs`
`-fprofile-generate`(pass 1)
`-fprofile-use=default.profdata`(pass 2) `-xCORE-AVX512`
`-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops`
`-qopt-mem-layout-trans=4 -ljemalloc`
`-L/usr/local/jemalloc64-5.0.1/lib`

526.blender_r: `basepeak = yes`

Benchmarks using Fortran, C, and C++:
`-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math`
`-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4`
`-nostandard-realloc-lhs -align array32byte -auto -ljemalloc`
`-L/usr/local/jemalloc64-5.0.1/lib`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z12-V1.2.html`
`http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.2022-10-12.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z12-V1.2.xml`
`http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.2022-10-12.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-02-07 17:17:33-0500.
Report generated on 2023-03-15 10:17:20 by CPU2017 PS formatter v6442.
Originally published on 2023-03-14.