SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11
(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 932

SPECrate®2017_fp_peak = 998

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2023
Hardware Availability: Jan-2023
Software Availability: Feb-2023

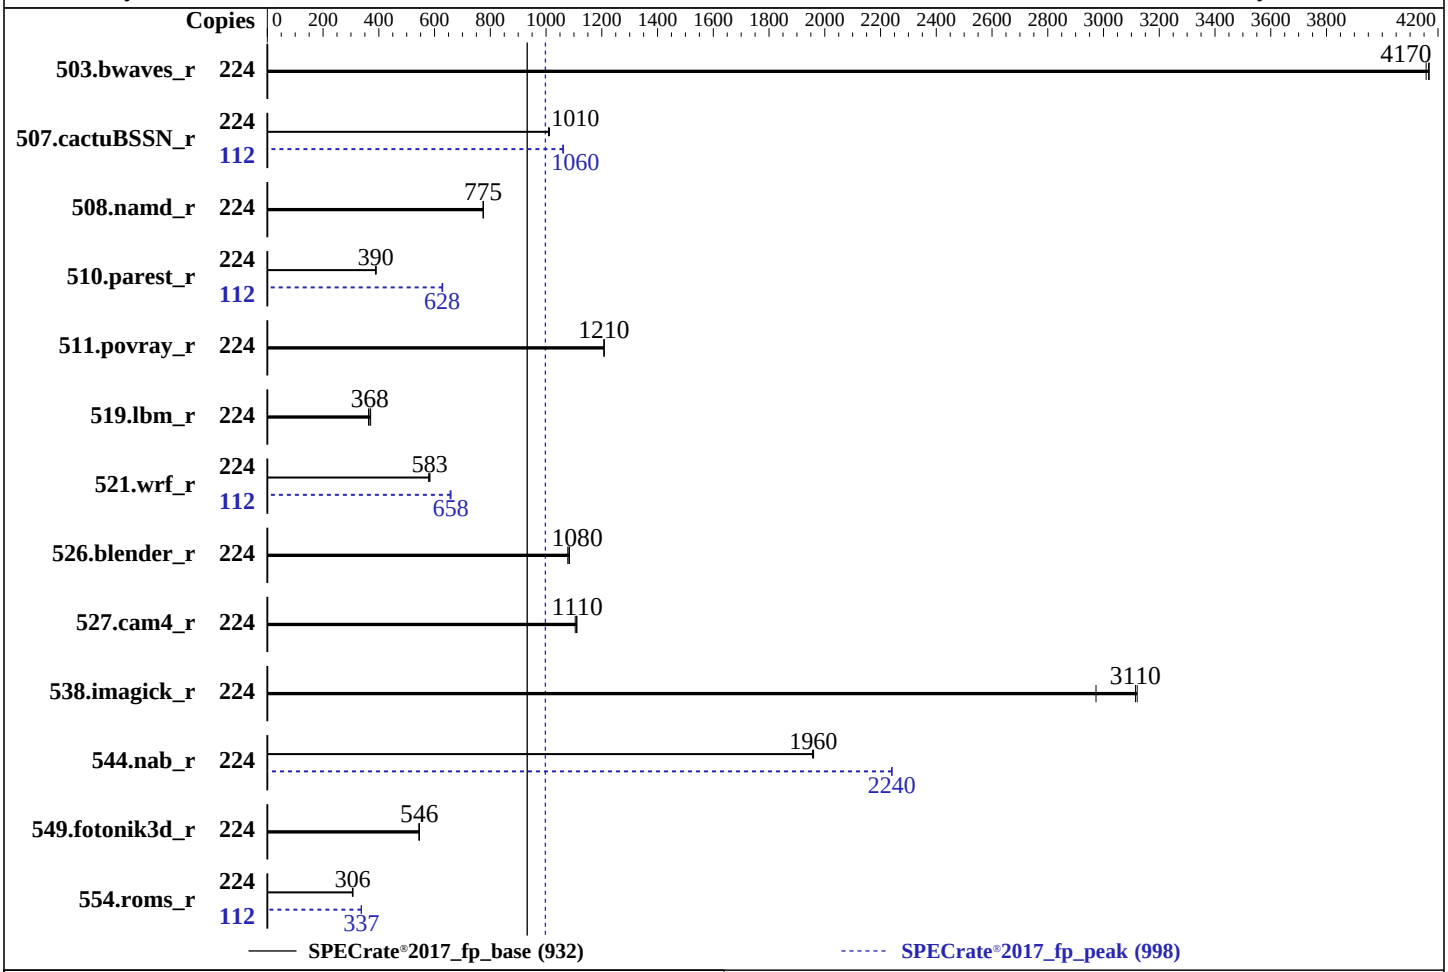

Hardware

CPU Name:	Intel Xeon Platinum 8480+
Max MHz:	3800
Nominal:	2000
Enabled:	112 cores, 2 chips, 2 threads/core
Orderable:	1, 2 chip(s)
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	105 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 2.9 TB NVMe SSD
Other:	None

Software

OS:	Ubuntu 22.04.2 LTS Kernel 5.15.0-60-generic
Compiler:	C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	HPE BIOS Version v1.22 01/18/2023 released Jan-2023
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL380a Gen11
(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 932

SPECrate®2017_fp_peak = 998

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2023
Hardware Availability: Jan-2023
Software Availability: Feb-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	224	540	4160	539	4170	**539**	**4170**	224	540	4160	539	4170	**539**	**4170**
507.cactuBSSN_r	224	281	1010	**281**	**1010**	280	1010	112	**134**	**1060**	134	1060	133	1060
508.namd_r	224	275	774	274	775	**275**	**775**	224	275	774	274	775	**275**	**775**
510.parest_r	224	**1504**	**390**	1508	388	1502	390	112	**467**	**628**	466	629	467	627
511.povray_r	224	433	1210	433	1210	**433**	**1210**	224	433	1210	433	1210	**433**	**1210**
519.lbm_r	224	650	363	**641**	**368**	637	371	224	650	363	**641**	**368**	637	371
521.wrf_r	224	867	579	**861**	**583**	861	583	112	383	656	**381**	**658**	381	659
526.blender_r	224	**315**	**1080**	316	1080	315	1080	224	**315**	**1080**	316	1080	315	1080
527.cam4_r	224	**353**	**1110**	353	1110	355	1100	224	**353**	**1110**	353	1110	355	1100
538.imagick_r	224	**179**	**3110**	179	3120	187	2970	224	**179**	**3110**	179	3120	187	2970
544.nab_r	224	**192**	**1960**	193	1960	192	1960	224	168	2240	168	2240	**168**	**2240**
549.fotonik3d_r	224	1606	544	1600	546	**1600**	**546**	224	1606	544	1600	546	**1600**	**546**
554.roms_r	224	1166	305	**1162**	**306**	1159	307	112	527	338	**528**	**337**	528	337

SPECrate®2017_fp_base = 932

SPECrate®2017_fp_peak = 998

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
IRQ balance service was stopped using "systemctl stop irqbalance.service"
tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
 Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
The system ROM used for this result contains Intel microcode version 0x2b000161 for
the Intel Xeon Platinum 8480+ processor.
BIOS Configuration:
 Workload Profile set to General Throughput Compute
 Thermal Configuration set to Maximum Cooling
 Enhanced Processor Performance Profile set to Aggressive
 Last Level Cache (LLC) Dead Line Allocation set to Disabled
 Memory Patrol Scrubbing set to Disabled
 Workload Profile set to Custom
  DCU Stream Prefetcher set to Disabled
  Adjacent Sector Prefetch set to Disabled
  Minimum Processor Idle Power Package C-State set to Package C6 (non-retention) State

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on admin1 Sat Feb 25 20:36:57 2023

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
```

(Continued on next page)

Platform Notes (Continued)

```
 11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.6)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
   Linux admin1 5.15.0-60-generic #66-Ubuntu SMP Fri Jan 20 14:29:49 UTC 2023 x86_64 x86_64 x86_64 GNU/Linux

 ------------------------------------------------------------
 2. w
    20:36:57 up 7 min,  2 users,  load average: 1.00, 0.80, 0.41
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
   admin1   tty1     -                20:33    3:02   0.12s  0.01s -bash
   admin1   pts/0    -                20:34    6.00s  0.89s  0.06s sudo -i

 ------------------------------------------------------------
 3. Username
   From environment variable $USER:  root
   From the command 'logname':       admin1

 ------------------------------------------------------------
 4. ulimit -a
   time(seconds)        unlimited
   file(blocks)         unlimited
   data(kbytes)         unlimited
   stack(kbytes)        unlimited
   coredump(blocks)     0
   memory(kbytes)       unlimited
   locked memory(kbytes) 132070696
   process              4126765
   nofiles              1024
   vmemory(kbytes)      unlimited
   locks                unlimited
   rtprio               0

 ------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
 5. sysinfo process ancestry
  /sbin/init
  /bin/login -p --
  -bash
  sudo -i
  sudo -i
  -bash
  -bash
  runcpu --nobuild --action validate --define default-platform-flags --define numcopies=224 -c
    ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=112 --define physicalfirst
     --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
  runcpu --nobuild --action validate --define default-platform-flags --define numcopies=224 --configfile
    ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=112 --define physicalfirst
    --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
     --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
     $SPEC/tmp/CPU2017.013/templogs/preenv.fprate.013.0.log --lognum 013.0 --from_runcpu 2
  specperl $SPEC/bin/sysinfo
 $SPEC = /home/cpu2017

 ------------------------------------------------------------
 6. /proc/cpuinfo
     model name      : Intel(R) Xeon(R) Platinum 8480+
     vendor_id       : GenuineIntel
     cpu family      : 6
     model           : 143
     stepping        : 6
     microcode       : 0x2b000161
     bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
     cpu cores       : 56
     siblings        : 112
     2 physical ids (chips)
     224 processors (hardware threads)
     physical id 0: core ids 0-55
     physical id 1: core ids 0-55
     physical id 0: apicids 0-111
     physical id 1: apicids 128-239
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
    virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.37.2:
   Architecture:                    x86_64
   CPU op-mode(s):                  32-bit, 64-bit
   Address sizes:                   46 bits physical, 57 bits virtual
   Byte Order:                      Little Endian
```

(Continued on next page)

Platform Notes (Continued)

```
CPU(s):                          224
On-line CPU(s) list:             0-223
Vendor ID:                       GenuineIntel
Model name:                      Intel(R) Xeon(R) Platinum 8480+
CPU family:                      6
Model:                           143
Thread(s) per core:              2
Core(s) per socket:              56
Socket(s):                       2
Stepping:                        6
BogoMIPS:                        4000.00
Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                 lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                 nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                 lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                 invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                                 vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
                                 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                                 clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                                 xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                 split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                                 avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                                 avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                                 cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                                 arch_lbr amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
                                 arch_capabilities
Virtualization:                  VT-x
L1d cache:                       5.3 MiB (112 instances)
L1i cache:                       3.5 MiB (112 instances)
L2 cache:                        224 MiB (112 instances)
L3 cache:                        210 MiB (2 instances)
NUMA node(s):                    8
NUMA node0 CPU(s):               0-13,112-125
NUMA node1 CPU(s):               14-27,126-139
NUMA node2 CPU(s):               28-41,140-153
NUMA node3 CPU(s):               42-55,154-167
NUMA node4 CPU(s):               56-69,168-181
NUMA node5 CPU(s):               70-83,182-195
NUMA node6 CPU(s):               84-97,196-209
NUMA node7 CPU(s):               98-111,210-223
Vulnerability Itlb multihit:     Not affected
Vulnerability L1tf:              Not affected
Vulnerability Mds:               Not affected
Vulnerability Meltdown:          Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
   Vulnerability Mmio stale data:   Not affected
   Vulnerability Retbleed:          Not affected
   Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
   Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
   Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW
                                    sequence
   Vulnerability Srbds:             Not affected
   Vulnerability Tsx async abort:   Not affected

 From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
      L1d       48K     5.3M   12 Data            1     64        1             64
      L1i       32K     3.5M    8 Instruction     1     64        1             64
      L2         2M     224M   16 Unified         2   2048        1             64
      L3       105M     210M   15 Unified         3 114688        1             64

 ------------------------------------------------------------
 8. numactl --hardware
 NOTE: a numactl 'node' might or might not correspond to a physical chip.
   available: 8 nodes (0-7)
   node 0 cpus: 0-13,112-125
   node 0 size: 128728 MB
   node 0 free: 127846 MB
   node 1 cpus: 14-27,126-139
   node 1 size: 129017 MB
   node 1 free: 128633 MB
   node 2 cpus: 28-41,140-153
   node 2 size: 129017 MB
   node 2 free: 128533 MB
   node 3 cpus: 42-55,154-167
   node 3 size: 129017 MB
   node 3 free: 128408 MB
   node 4 cpus: 56-69,168-181
   node 4 size: 129017 MB
   node 4 free: 128653 MB
   node 5 cpus: 70-83,182-195
   node 5 size: 129017 MB
   node 5 free: 128632 MB
   node 6 cpus: 84-97,196-209
   node 6 size: 129017 MB
   node 6 free: 128625 MB
   node 7 cpus: 98-111,210-223
   node 7 size: 128970 MB
   node 7 free: 128311 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  20  30  30  30  30  30  30
```

(Continued on next page)

Platform Notes (Continued)

```
     1:  20  10  30  30  30  30  30  30
     2:  30  30  10  20  30  30  30  30
     3:  30  30  20  10  30  30  30  30
     4:  30  30  30  30  10  20  30  30
     5:  30  30  30  30  20  10  30  30
     6:  30  30  30  30  30  30  10  20
     7:  30  30  30  30  30  30  20  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1056565568 kB

------------------------------------------------------------
10. who -r
  run-level 5 Feb 25 20:32

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.6)
  Default Target  Status
  graphical       degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT                                    LOAD   ACTIVE SUB    DESCRIPTION
  * ipmiutil_wdt.service                    loaded failed failed ipmiutil Watchdog Timer Service using cron
  * systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE             UNIT FILES
  enabled           ModemManager anacron apparmor blk-availability cloud-config cloud-final cloud-init
                    cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                    grub-common grub-initrd-fallback ipmiutil_wdt irqbalance keyboard-setup lvm2-monitor
                    lxd-agent multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rpcbind
                    rsyslog secureboot-db setvtrgb snapd ssh systemd-networkd systemd-networkd-wait-online
                    systemd-pstore systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds
                    ubuntu-advantage udisks2 ufw unattended-upgrades vgauth
  enabled-runtime   netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
  disabled          console-getty debug-shell ipmi_port ipmievd ipmiutil_asy ipmiutil_evt iscsid nftables
                    powertop rsync serial-getty@ systemd-boot-check-no-failures systemd-network-generator
                    systemd-sysext systemd-time-wait-sync upower
  generated         apport openipmi
  indirect          uuidd
  masked            cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo
                    x11-common

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
 14. Linux kernel boot-time arguments, from /proc/cmdline
   BOOT_IMAGE=/vmlinuz-5.15.0-60-generic
   root=/dev/mapper/ubuntu--vg-ubuntu--lv
   ro

 ------------------------------------------------------------
 15. tuned-adm active
   Current active profile: throughput-performance

 ------------------------------------------------------------
 16. sysctl
   kernel.numa_balancing               1
   kernel.randomize_va_space           2
   vm.compaction_proactiveness        20
   vm.dirty_background_bytes           0
   vm.dirty_background_ratio          10
   vm.dirty_bytes                      0
   vm.dirty_expire_centisecs        3000
   vm.dirty_ratio                     40
   vm.dirty_writeback_centisecs      500
   vm.dirtytime_expire_seconds     43200
   vm.extfrag_threshold              500
   vm.min_unmapped_ratio               1
   vm.nr_hugepages                     0
   vm.nr_hugepages_mempolicy           0
   vm.nr_overcommit_hugepages          0
   vm.swappiness                      10
   vm.watermark_boost_factor       15000
   vm.watermark_scale_factor          10
   vm.zone_reclaim_mode                0

 ------------------------------------------------------------
 17. /sys/kernel/mm/transparent_hugepage
   defrag          always defer defer+madvise [madvise] never
   enabled         always [madvise] never
   hpage_pmd_size  2097152
   shmem_enabled   always within_size advise [never] deny force

 ------------------------------------------------------------
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs   60000
   defrag                      1
   max_ptes_none             511
   max_ptes_shared           256
   max_ptes_swap              64
   pages_to_scan            4096
   scan_sleep_millisecs    10000
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 22.04.2 LTS

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/cpu2017
  Filesystem                     Type  Size  Used Avail Use% Mounted on
  /dev/mapper/ubuntu--vg-ubuntu--lv ext4  2.9T  163G  2.6T   6% /

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         HPE
    Product:        ProLiant DL380a Gen11
    Product Family: ProLiant
    Serial:         CNX22602NL

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     16x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800
     8x UNKNOWN NOT AVAILABLE


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       HPE
   BIOS Version:      1.22
   BIOS Date:         01/18/2023
   BIOS Revision:     1.22
   Firmware Revision: 1.20
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
```

(Continued on next page)

Compiler Version Notes (Continued)

```
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

549.fotonik3d_r: `-DSPEC_LP64`
554.roms_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
`-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

C++ benchmarks:
`-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Fortran benchmarks:
`-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using both Fortran and C:
`-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using both C and C++:
`-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using Fortran, C, and C++:
`-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Peak Compiler Invocation

C benchmarks:
`icx`

(Continued on next page)

Peak Compiler Invocation (Continued)

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -qopt-zmm-usage=high -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)

Peak Optimization Flags (Continued)

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

521.wrf_r: -w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: basepeak = yes

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.1.html
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.1.xml
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-02-25 15:36:57-0500.
Report generated on 2023-03-15 10:21:28 by CPU2017 PS formatter v6442.
Originally published on 2023-03-14.