



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212
(2.40 GHz, Intel Xeon Gold 6336Y)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = 397

CPU2017 License: 006042


Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

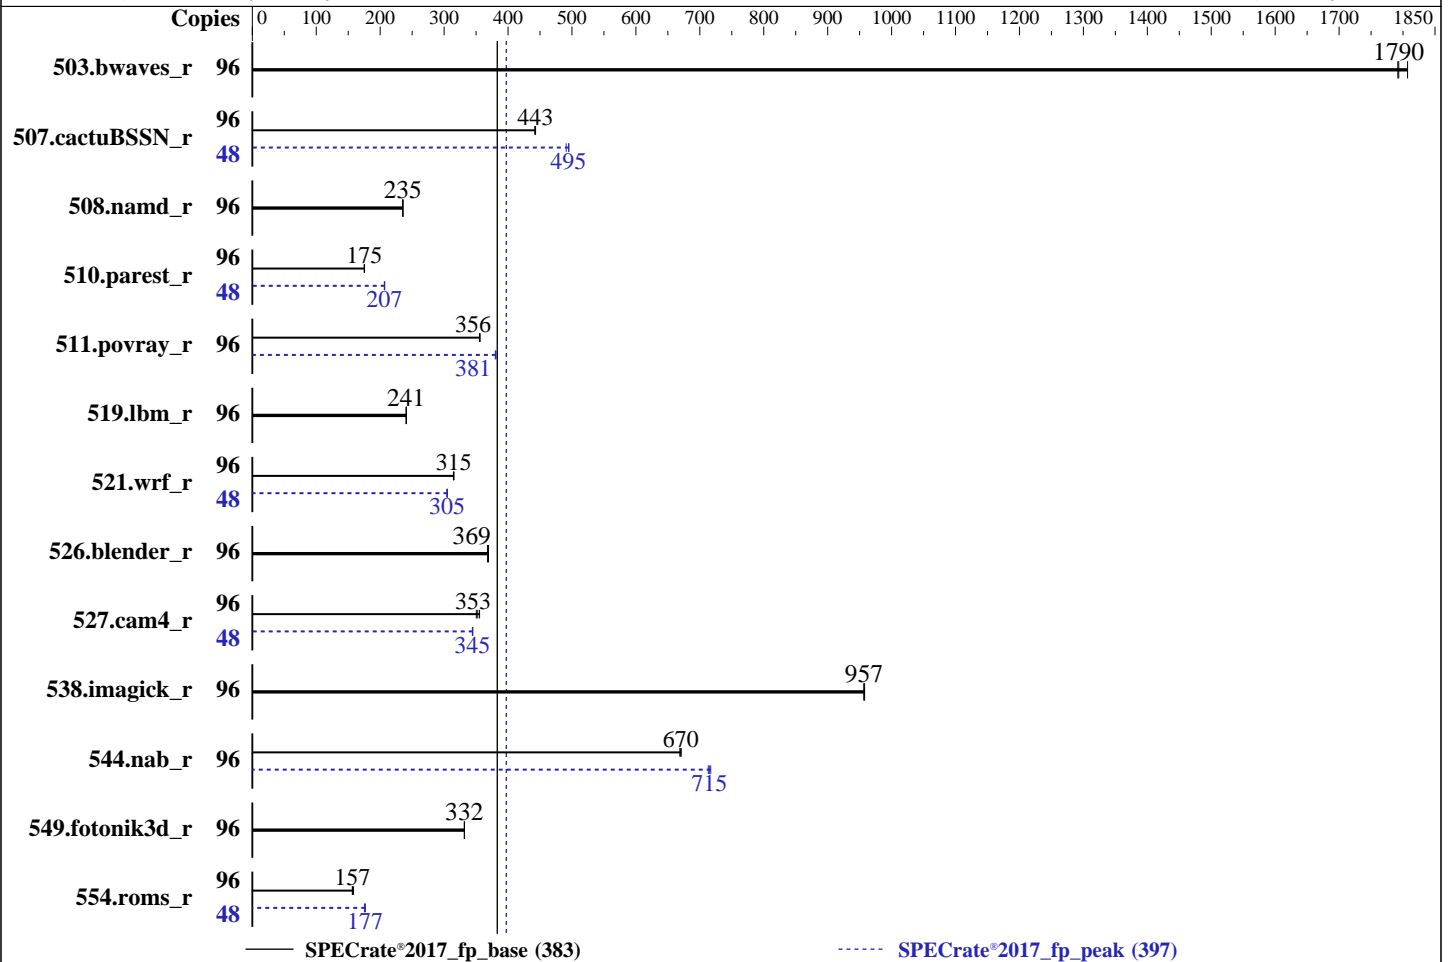

Hardware

CPU Name: Intel Xeon Gold 6336Y
 Max MHz: 3600
 Nominal: 2400
 Enabled: 48 cores, 2 chips, 2 threads/core
 Orderable: 1,2 Chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1.25 MB I+D on chip per core
 L3: 36 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)
 Storage: 1 x 512 GB NVMe SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 8.5 (Ootpa) 4.18.0-348.el8.x86_64
 Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version PEGC0042 released Jan-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212
(2.40 GHz, Intel Xeon Gold 6336Y)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = 397

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|-----------------|--------|------------|------------|------------|------------|-------------|-------------|--------|------------|------------|------------|------------|-------------|-------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 503.bwaves_r | 96 | 533 | 1810 | 537 | 1790 | 537 | 1790 | 96 | 533 | 1810 | 537 | 1790 | 537 | 1790 |
| 507.cactuBSSN_r | 96 | 274 | 443 | 274 | 443 | 275 | 442 | 48 | 124 | 491 | 123 | 495 | 123 | 495 |
| 508.namd_r | 96 | 387 | 235 | 387 | 236 | 388 | 235 | 96 | 387 | 235 | 387 | 236 | 388 | 235 |
| 510.parest_r | 96 | 1431 | 176 | 1435 | 175 | 1433 | 175 | 48 | 608 | 206 | 607 | 207 | 606 | 207 |
| 511.povray_r | 96 | 630 | 356 | 630 | 356 | 631 | 355 | 96 | 590 | 380 | 589 | 381 | 588 | 381 |
| 519.lbm_r | 96 | 420 | 241 | 420 | 241 | 420 | 241 | 96 | 420 | 241 | 420 | 241 | 420 | 241 |
| 521.wrf_r | 96 | 682 | 315 | 683 | 315 | 684 | 315 | 48 | 354 | 304 | 353 | 305 | 352 | 305 |
| 526.blender_r | 96 | 396 | 369 | 396 | 369 | 397 | 368 | 96 | 396 | 369 | 396 | 369 | 397 | 368 |
| 527.cam4_r | 96 | 476 | 353 | 472 | 355 | 479 | 350 | 48 | 243 | 345 | 244 | 344 | 244 | 345 |
| 538.imagick_r | 96 | 249 | 958 | 250 | 957 | 250 | 957 | 96 | 249 | 958 | 250 | 957 | 250 | 957 |
| 544.nab_r | 96 | 241 | 671 | 241 | 670 | 242 | 669 | 96 | 227 | 713 | 226 | 715 | 225 | 717 |
| 549.fotonik3d_r | 96 | 1127 | 332 | 1128 | 332 | 1128 | 332 | 96 | 1127 | 332 | 1128 | 332 | 1128 | 332 |
| 554.roms_r | 96 | 963 | 158 | 974 | 157 | 975 | 156 | 48 | 435 | 175 | 432 | 177 | 432 | 177 |

SPECrate®2017_fp_base = **383**

SPECrate®2017_fp_peak = **397**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212
(2.40 GHz, Intel Xeon Gold 6336Y)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = 397

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

General Notes (Continued)

```
sync; echo 1> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

```
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

BIOS Settings:

```
Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Extreme Performance
SNC (Sub NUMA) = Enable
KTI Prefetch = Enable
LLC Dead Line Alloc = Disable
Hyper-Threading = Enabled
```

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on Tyronespec Mon Mar 6 21:36:24 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. `uname -a`
2. `w`
3. Username
4. `ulimit -a`
5. `sysinfo process ancestry`
6. `/proc/cpuinfo`
7. `lscpu`
8. `numactl --hardware`
9. `/proc/meminfo`
10. `who -r`
11. Systemd service manager version: `systemd 239 (239-51.el8)`
12. Failed units, from `systemctl list-units --state=failed`
13. Services, from `systemctl list-unit-files`

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212
(2.40 GHz, Intel Xeon Gold 6336Y)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = 397

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

Platform Notes (Continued)

14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
22. Disk information
23. /sys/devices/virtual/dmi/id
24. dmidecode
25. BIOS

1. `uname -a`

```
Linux Tyronespec 4.18.0-348.el8.x86_64 #1 SMP Mon Oct 4 12:17:22 EDT 2021 x86_64 x86_64 x86_64 GNU/Linux
```

2. `w`

```
21:36:24 up 7:48, 1 user, load average: 51.67, 84.03, 90.42
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU  WHAT
root      tty1    -             13:49      7:44m     1.24s    0.02s  -bash
```

3. Username

```
From environment variable $USER: root
```

4. `ulimit -a`

```
core file size          (blocks, -c) 0
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 4126654
max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 4126654
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212
(2.40 GHz, Intel Xeon Gold 6336Y)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = 397

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

Platform Notes (Continued)

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 18
```

```
login -- root
```

```
-bash
```

```
-bash
```

```
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 -c
ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=48 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 --configfile
ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=48 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Gold 6336Y CPU @ 2.40GHz
vendor_id      : GenuineIntel
cpu family     : 6
model          : 106
stepping       : 6
microcode      : 0xd0002e0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 24
siblings       : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-23
physical id 1: core ids 0-23
physical id 0: apicids 0-47
physical id 1: apicids 64-111
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.32.1:

```
Architecture:    x86_64
CPU op-mode(s):  32-bit, 64-bit
Byte Order:      Little Endian
CPU(s):          96
On-line CPU(s) list: 0-95
Thread(s) per core: 2
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212
(2.40 GHz, Intel Xeon Gold 6336Y)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = 397

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

Platform Notes (Continued)

```

Core(s) per socket: 24
Socket(s): 2
NUMA node(s): 2
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
CPU family: 6
Model: 106
Model name: Intel(R) Xeon(R) Gold 6336Y CPU @ 2.40GHz
BIOS Model name: Intel(R) Xeon(R) Gold 6336Y CPU @ 2.40GHz
Stepping: 6
CPU MHz: 2400.000
CPU max MHz: 3600.0000
CPU min MHz: 800.0000
BogoMIPS: 4800.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 1280K
L3 cache: 36864K
NUMA node0 CPU(s): 0-23,48-71
NUMA node1 CPU(s): 24-47,72-95

```

```

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts
acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art
arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca
sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single intel_ppin ssbd mba ibrs ibpb
stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust
sgx bml hle avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi
umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
avx512_vpoperndq la57 rdpid sgx_lc fsrm md_clear pconfig flush_l1d arch_capabilities

```

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-23,48-71
node 0 size: 515676 MB
node 0 free: 493529 MB
node 1 cpus: 24-47,72-95
node 1 size: 516045 MB
node 1 free: 495203 MB
node distances:
node  0  1

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212
(2.40 GHz, Intel Xeon Gold 6336Y)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = 397

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

Platform Notes (Continued)

0: 10 20
1: 20 10

9. /proc/meminfo

MemTotal: 1056483628 kB

10. who -r

run-level 3 Mar 6 13:50

11. Systemd service manager version: systemd 239 (239-51.el8)

Default Target Status
multi-user degraded

12. Failed units, from systemctl list-units --state=failed

UNIT LOAD ACTIVE SUB DESCRIPTION

* systemd-udev-settle.service loaded failed failed udev Wait for Complete Device Initialization

13. Services, from systemctl list-unit-files

STATE UNIT FILES

| | |
|-----------|--|
| enabled | ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon atd auditd autovt@ avahi-daemon bluetooth chronyd crond cups display-manager firewalld gdm getty@ import-state insights-client-boot irqbalance iscsi iscsi-onboot kdump ksm ksmtuned libstoragemgmt libvirt loadmodules lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname nvidia-hibernate nvidia-resume nvidia-suspend nvme-fc-boot-connections ostree-remount qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark sep5 smartd sshd sssd syslog timedatex tuned udisks2 vdo vgauthd vmtoolsd |
| disabled | arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait console-getty cpupower cups-browsed debug-shell dnsmasq ebttables gssproxy httpd httpd@ initial-setup initial-setup-reconfiguration iprump iprunit iprupdate iscsid iscsiui kpatch kvm_stat ledmon man-db-restart-cache-update ndctl-monitor netcf-transaction nfs-blkmap nfs-convert nfs-server nftables numad nvidia-powerd nvmmf-autoconnect oddjobd podman podman-auto-update podman-restart psacct radvd ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts saslauthd serial-getty@ snmpd snmptrapd speech-dispatcherd sshd-keygen@ switcheroo-control systemd-nsd systemd-resolved tcsh tog-pegasus upower virtinterfaced virtnetworkd virtnodevd virtnwfilterd virtproxyd virtqemud virtsecret virtstorage wpa_supplicant |
| generated | SystemTap compile-server gcc-toolset-10-stap-server gcc-toolset-10-systemtap gcc-toolset-11-stap-server gcc-toolset-11-systemtap gcc-toolset-9-stap-server gcc-toolset-9-systemtap scripts startup |
| indirect | spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo virtlockd virtlogd |
| masked | systemd-timedated |

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
Tyrone Camarero TDI100C3R-212
(2.40 GHz, Intel Xeon Gold 6336Y)

SPECrate®2017_fp_base = 383
SPECrate®2017_fp_peak = 397

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Mar-2023
Hardware Availability: Apr-2021
Software Availability: May-2022

Platform Notes (Continued)

```

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd1,gpt2)/vmlinuz-4.18.0-348.el8.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

```

```

-----
15. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 3.60 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes

```

```

-----
16. tuned-adm active
  Current active profile: throughput-performance

```

```

-----
17. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    0
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                  10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212
(2.40 GHz, Intel Xeon Gold 6336Y)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = 397

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

Platform Notes (Continued)

```

-----
18. /sys/kernel/mm/transparent_hugepage
   defrag          always defer defer+madvise [madvise] never
   enabled         [always] madvise never
   hpage_pmd_size 2097152
   shmem_enabled   always within_size advise [never] deny force

```

```

-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs 60000
   defrag                 1
   max_ptes_none          511
   max_ptes_swap          64
   pages_to_scan          4096
   scan_sleep_millisecs  10000

```

```

-----
20. OS release
   From /etc/*-release /etc/*-version
   os-release             Red Hat Enterprise Linux 8.5 (Ootpa)
   redhat-release         Red Hat Enterprise Linux release 8.5 (Ootpa)
   system-release         Red Hat Enterprise Linux release 8.5 (Ootpa)

```

```

-----
21. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
   itlb_multihit         Not affected
   lltf                  Not affected
   mds                   Not affected
   meltdown              Not affected
   spec_store_bypass     Mitigation: Speculative Store Bypass disabled via prctl and seccomp
   spectre_v1             Mitigation: usercopy/swapgs barriers and __user pointer sanitization
   spectre_v2            Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
   srbds                 Not affected
   tsx_async_abort       Not affected

```

For more information, see the Linux documentation on hardware vulnerabilities, for example <https://www.kernel.org/doc/html/latest/admin-guide/hw-vuln/index.html>

22. Disk information

SPEC is set to: /home/cpu2017

| Filesystem | Type | Size | Used | Avail | Use% | Mounted on |
|-----------------------|------|------|------|-------|------|------------|
| /dev/mapper/rhel-home | xfs | 402G | 210G | 192G | 53% | /home |

```

-----
23. /sys/devices/virtual/dmi/id
   Vendor:                TyroneSystems

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212
(2.40 GHz, Intel Xeon Gold 6336Y)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = 397

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

Platform Notes (Continued)

Product: TDI100C3R-212
Product Family: Family
Serial: 2X20382301

24. dmidecode

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200

25. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: PEGC0042
BIOS Date: 01/16/2023
BIOS Revision: 5.22

Compiler Version Notes

```
=====  
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)  
 | 544.nab_r(base, peak)  
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

```
=====  
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)  
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

```
=====  
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)  
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212
(2.40 GHz, Intel Xeon Gold 6336Y)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = 397

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

Compiler Version Notes (Continued)

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)

=====
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

=====
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212
(2.40 GHz, Intel Xeon Gold 6336Y)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = 397

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212
(2.40 GHz, Intel Xeon Gold 6336Y)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = 397

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212
(2.40 GHz, Intel Xeon Gold 6336Y)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = 397

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -qopt-zmm-usage=high -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212
(2.40 GHz, Intel Xeon Gold 6336Y)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = 397

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

Peak Optimization Flags (Continued)

```
511.povray_r: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-ICX-revA.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-ICX-revA.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-06 16:36:23-0500.

Report generated on 2023-03-29 00:34:47 by CPU2017 PDF formatter v6442.

Originally published on 2023-03-28.