



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6448H,
2.40GHz)

SPECrate®2017_fp_base = 721

SPECrate®2017_fp_peak = 742

CPU2017 License: 9019


Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

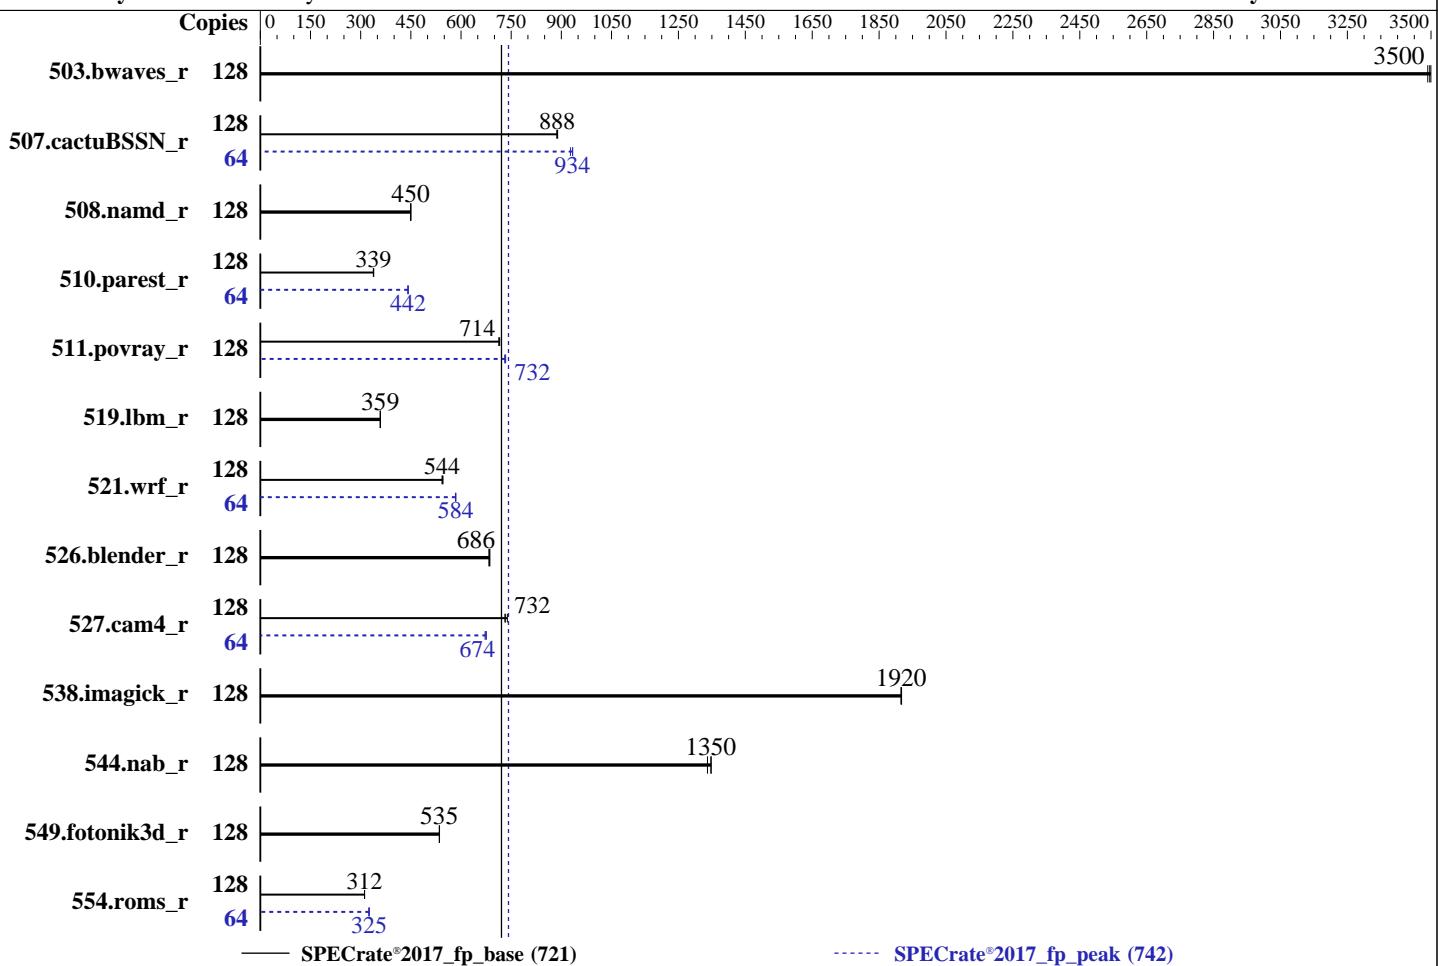

— SPECrate®2017_fp_base (721)

----- SPECrate®2017_fp_peak (742)

Hardware

CPU Name: Intel Xeon Gold 6448H
 Max MHz: 4100
 Nominal: 2400
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1,2 Chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 960 GB M.2 SSD SATA
 Other: None

OS:

SUSE Linux Enterprise Server 15 SP4
 5.14.21-150400.22-default

Compiler:
 C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;

Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;

No

Firmware: Version 4.3.1a released Feb-2023

File System: xfs

System State: Run level 3 (multi-user)

Base Pointers: 64-bit

Peak Pointers: 64-bit

Other: jemalloc memory allocator V5.0.1

Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6448H,
2.40GHz)

SPECrate®2017_fp_base = 721

SPECrate®2017_fp_peak = 742

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	367	3500	367	3500	368	3490	128	367	3500	367	3500	368	3490
507.cactubSSN_r	128	183	887	183	888	182	889	64	87.4	927	86.8	934	86.8	934
508.namd_r	128	270	450	271	449	270	450	128	270	450	271	449	270	450
510.parest_r	128	991	338	989	339	988	339	64	379	442	379	441	379	442
511.povray_r	128	419	714	418	716	419	714	128	408	732	409	731	407	733
519.lbm_r	128	376	359	376	359	376	359	128	376	359	376	359	376	359
521.wrf_r	128	527	544	527	544	525	546	64	245	584	245	584	246	583
526.blender_r	128	284	686	285	683	284	686	128	284	686	285	683	284	686
527.cam4_r	128	306	732	306	731	303	739	64	167	672	166	676	166	674
538.imagick_r	128	166	1920	166	1920	166	1920	128	166	1920	166	1920	166	1920
544.nab_r	128	160	1350	161	1340	160	1350	128	160	1350	161	1340	160	1350
549.fotonik3d_r	128	932	535	931	536	932	535	128	932	535	931	536	932	535
554.roms_r	128	652	312	653	312	653	311	64	313	325	313	324	312	326

SPECrate®2017_fp_base = 721

SPECrate®2017_fp_peak = 742

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6448H,
2.40GHz)

SPECrate®2017_fp_base = 721

SPECrate®2017_fp_peak = 742

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

General Notes (Continued)

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Sub NUMA Clustering set to Enable SNC4

LLC Dead Line set to Disabled

ADDDC Sparsing set to Disabled

Processor C6 Report set to Enabled

UPI Link Enablement 3

UPI Link Power Management Enabled

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on specsrv Sun Apr 2 23:41:00 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6448H,
2.40GHz)

SPECrate®2017_fp_base = 721

SPECrate®2017_fp_peak = 742

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

```
14. cpupower frequency-info  
15. sysctl  
16. /sys/kernel/mm/transparent_hugepage  
17. /sys/kernel/mm/transparent_hugepage/khugepaged  
18. OS release  
19. Disk information  
20. /sys/devices/virtual/dmi/id  
21. dmidecode  
22. BIOS
```

```
1. uname -a  
Linux specsrv 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)  
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w  
23:41:00 up 5 min, 1 user, load average: 0.23, 2.04, 1.29  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root ttym1 - 23:39 12.00s 1.05s 0.17s -bash
```

```
3. Username  
From environment variable $USER: root
```

```
4. ulimit -a  
core file size          (blocks, -c) unlimited  
data seg size           (kbytes, -d) unlimited  
scheduling priority     (-e) 0  
file size               (blocks, -f) unlimited  
pending signals          (-i) 4126806  
max locked memory       (kbytes, -l) 64  
max memory size         (kbytes, -m) unlimited  
open files              (-n) 1024  
pipe size               (512 bytes, -p) 8  
POSIX message queues    (bytes, -q) 819200  
real-time priority       (-r) 0  
stack size               (kbytes, -s) unlimited  
cpu time                (seconds, -t) unlimited  
max user processes       (-u) 4126806  
virtual memory           (kbytes, -v) unlimited  
file locks               (-x) unlimited
```

```
5. sysinfo process ancestry
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6448H,
2.40GHz)

SPECrate®2017_fp_base = 721

SPECrate®2017_fp_peak = 742

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --reportable --iterations 3 --define smt-on --define
  cores=64 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune all -o all
    fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --reportable --iterations 3 --define smt-on --define
  cores=64 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune all
  --output_format all --nopower --runmode rate --tune base:peak --size reframe fprate --nopreenv
  --note-preenv --logfile $SPEC/tmp/CPU2017.115/templogs/preenv.fprate.115.0.log --lognum 115.0
  --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Gold 6448H
vendor_id       : GenuineIntel
cpu family     : 6
model          : 143
stepping        : 8
microcode       : 0x2b000161
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 32
siblings         : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	46 bits physical, 57 bits virtual
Byte Order:	LittleEndian
CPU(s):	128
On-line CPU(s) list:	0-127

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6448H,
2.40GHz)

SPECrate®2017_fp_base = 721

SPECrate®2017_fp_peak = 742

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

Vendor ID:	GenuineIntel
Model name:	Intel(R) Xeon(R) Gold 6448H
CPU family:	6
Model:	143
Thread(s) per core:	2
Core(s) per socket:	32
Socket(s):	2
Stepping:	8
CPU max MHz:	4100.0000
CPU min MHz:	800.0000
BogoMIPS:	4800.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmpf perf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
Virtualization:	VT-x
L1d cache:	3 MiB (64 instances)
L1i cache:	2 MiB (64 instances)
L2 cache:	128 MiB (64 instances)
L3 cache:	120 MiB (2 instances)
NUMA node(s):	8
NUMA node0 CPU(s):	0-7,64-71
NUMA node1 CPU(s):	8-15,72-79
NUMA node2 CPU(s):	16-23,80-87
NUMA node3 CPU(s):	24-31,88-95
NUMA node4 CPU(s):	32-39,96-103
NUMA node5 CPU(s):	40-47,104-111
NUMA node6 CPU(s):	48-55,112-119
NUMA node7 CPU(s):	56-63,120-127
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6448H,
2.40GHz)

SPECrate®2017_fp_base = 721

SPECrate®2017_fp_peak = 742

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp

Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization

Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-7,64-71

node 0 size: 129018 MB

node 0 free: 128171 MB

node 1 cpus: 8-15,72-79

node 1 size: 128669 MB

node 1 free: 128196 MB

node 2 cpus: 16-23,80-87

node 2 size: 129019 MB

node 2 free: 128623 MB

node 3 cpus: 24-31,88-95

node 3 size: 129019 MB

node 3 free: 128644 MB

node 4 cpus: 32-39,96-103

node 4 size: 129019 MB

node 4 free: 128655 MB

node 5 cpus: 40-47,104-111

node 5 size: 129019 MB

node 5 free: 128686 MB

node 6 cpus: 48-55,112-119

node 6 size: 129019 MB

node 6 free: 128687 MB

node 7 cpus: 56-63,120-127

node 7 size: 128938 MB

node 7 free: 128601 MB

node distances:

node	0	1	2	3	4	5	6	7
0:	10	20	20	20	20	20	20	20
1:	20	10	20	20	20	20	20	20
2:	20	20	10	20	20	20	20	20
3:	20	20	20	10	20	20	20	20

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6448H,
2.40GHz)

SPECrate®2017_fp_base = 721

SPECrate®2017_fp_peak = 742

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

```
4: 20 20 20 20 10 20 20 20  
5: 20 20 20 20 20 10 20 20  
6: 20 20 20 20 20 20 10 20  
7: 20 20 20 20 20 20 20 10
```

```
-----  
9. /proc/meminfo  
MemTotal: 1056487116 kB
```

```
-----  
10. who -r  
run-level 3 Apr 2 23:36
```

```
-----  
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)  
Default Target Status  
multi-user running
```

```
-----  
12. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance  
issue-generator kbdsettings klog lvm2-monitor nsqd postfix purge-kernels rollback rsyslog  
smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny  
enabled-runtime systemd-remount-fs  
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait  
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info  
firewalld gpm grub2-once haveged-switch-root ipmi ipmievrd issue-add-ssh-keys kexec-load  
lunmask man-db-create multipathd nfs nfs-blkmap rdisc rpcbind rpmconfigcheck rsyncd  
serial-getty@ smartd_generate_opts snmpd snmptrapd svnserve systemd-boot-check-no-failures  
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2  
indirect wickedd
```

```
-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default  
root=UUID=7a984919-bd0d-4451-8476-5139e3d5b29b  
splash=silent  
mitigations=auto  
quiet  
security=apparmor
```

```
-----  
14. cpupower frequency-info  
analyzing CPU 0:  
current policy: frequency should be within 800 MHz and 4.10 GHz.  
The governor "performance" may decide which speed to use
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6448H,
2.40GHz)

SPECrate®2017_fp_base = 721

SPECrate®2017_fp_peak = 742

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

within this range.

boost state support:

Supported: yes

Active: yes

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

16. /sys/kernel/mm/transparent_hugepage

defrag	always defer defer+madvise [madvise] never
enabled	[always] madvise never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

18. OS release

From /etc/*-release /etc/*-version

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6448H,
2.40GHz)

SPECrate®2017_fp_base = 721

SPECrate®2017_fp_peak = 742

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

os-release SUSE Linux Enterprise Server 15 SP4

19. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	220G	13G	208G	6%	/

20. /sys/devices/virtual/dmi/id

Vendor:	Cisco Systems Inc
Product:	UCSC-C240-M7SX
Serial:	WZP26330JLV

21. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x 0xAD00 HMCG94MEBRA109N 64 GB 2 rank 4800

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor:	Cisco Systems, Inc.
BIOS Version:	C240M7.4.3.1a.0.0201231701
BIOS Date:	02/01/2023
BIOS Revision:	5.29

The system clock was reset to a future date before running the test
and the exact test date is updated

Compiler Version Notes

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
| 544.nab_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6448H,
2.40GHz)

SPECrate®2017_fp_base = 721

SPECrate®2017_fp_peak = 742

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Compiler Version Notes (Continued)

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 507.cactusBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2023.0.0 Build 20221201

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2023.0.0 Build 20221201

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2023.0.0 Build 20221201

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6448H,
2.40GHz)

SPECrate®2017_fp_base = 721

SPECrate®2017_fp_peak = 742

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6448H,
2.40GHz)

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

SPECrate®2017_fp_base = 721

SPECrate®2017_fp_peak = 742

Test Date: Mar-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6448H,
2.40GHz)

SPECrate®2017_fp_base = 721

SPECrate®2017_fp_peak = 742

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -futo -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6448H,
2.40GHz)

SPECrate®2017_fp_base = 721

SPECrate®2017_fp_peak = 742

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

549.fotonik3d_r: basepeak = yes

```
554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.propdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revE.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6448H,
2.40GHz)

SPECrate®2017_fp_base = 721

SPECrate®2017_fp_peak = 742

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-04-03 02:41:00-0400.

Report generated on 2023-03-29 18:07:27 by CPU2017 PDF formatter v6442.

Originally published on 2023-03-29.