# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11
(2.00 GHz, Intel Xeon Platinum 8470)

**SPECrate®2017_fp_base = 905**

**SPECrate®2017_fp_peak = 968**

**CPU2017 License:** 3
**Test Sponsor:** HPE
**Tested by:** HPE

**Test Date:** Feb-2023
**Hardware Availability:** Jan-2023
**Software Availability:** May-2022

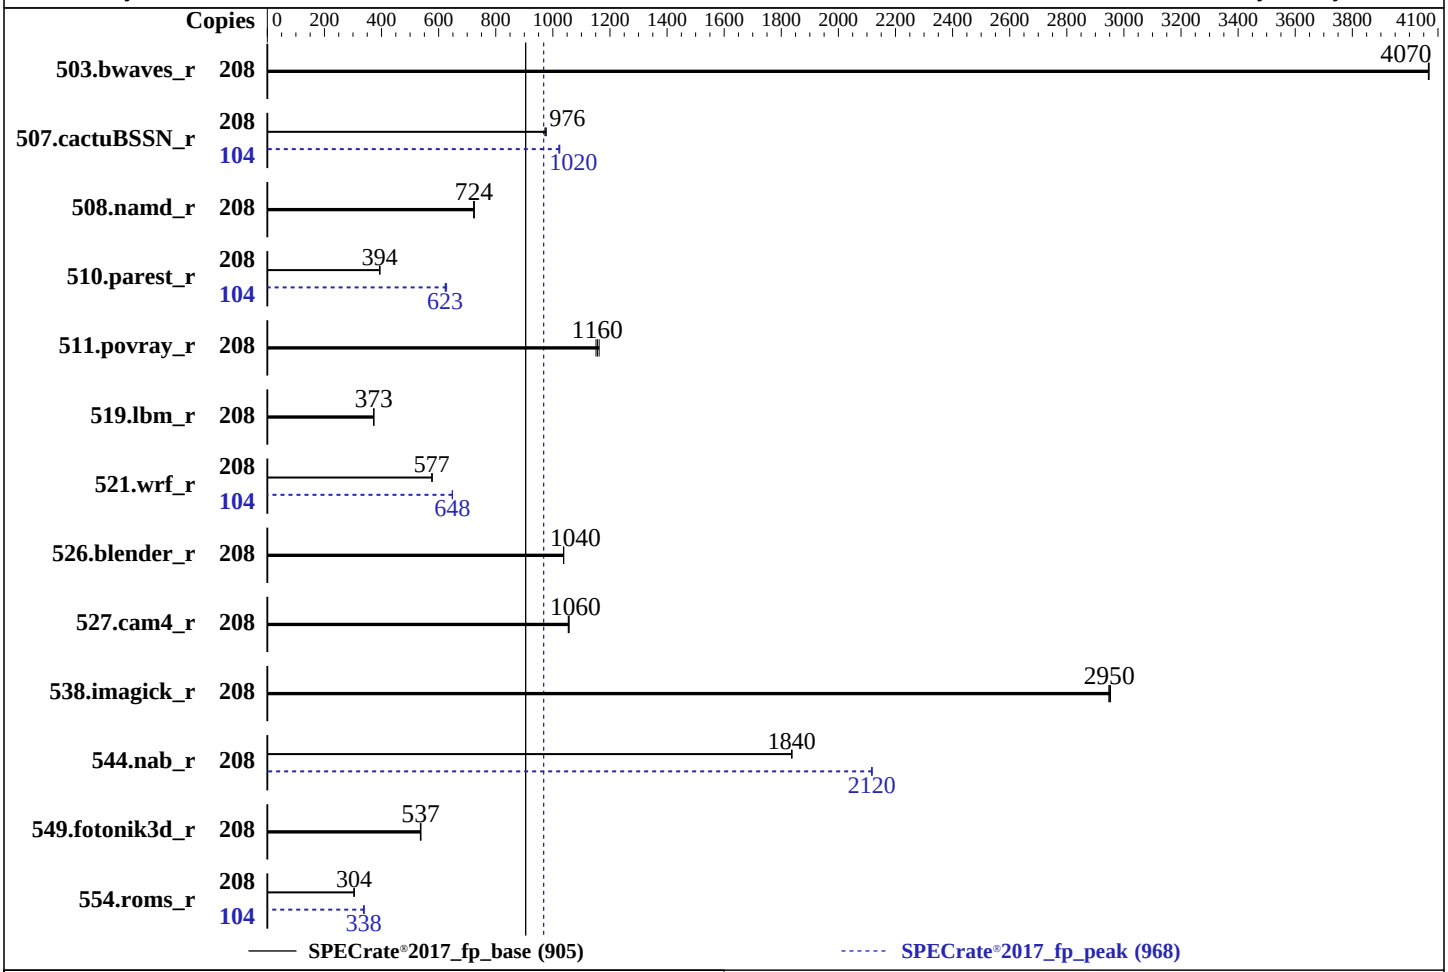


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon Platinum 8470 |
| Max MHz: | 3800 |
| Nominal: | 2000 |
| Enabled: | 96 cores, 2 chips, 2 threads/core |
| Orderable: | 1, 2 chip(s) |
| Cache L1: | 32 KB I + 48 KB D on chip per core |
| L2: | 2 MB I+D on chip per core |
| L3: | 105 MB I+D on chip per chip |
| Other: | None |
| Memory: | 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R) |
| Storage: | 1 x 960 GB SATA SSD |
| Other: | None |

## Software

| | |
|---|---|
| OS: | Red Hat Enterprise Linux 9.0 (Plow)<br>Kernel 5.14.0-70.13.1.el9_0.x86_64 |
| Compiler: | C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;<br>Fortran: Version 2022.1 of Intel Fortran Compiler for Linux; |
| Parallel: | No |
| Firmware: | HPE BIOS Version v1.22 01/18/2023 released Jan-2023 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | jemalloc memory allocator V5.0.1 |
| Power Management: | BIOS and OS set to prefer performance at the cost of additional power usage |

# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL360 Gen11
(2.00 GHz, Intel Xeon Platinum 8470)

SPECrate®2017_fp_base = 905

SPECrate®2017_fp_peak = 968

**CPU2017 License:** 3
**Test Sponsor:** HPE
**Tested by:** HPE

**Test Date:** Feb-2023
**Hardware Availability:** Jan-2023
**Software Availability:** May-2022

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 503.bwaves_r | 208 | 513 | 4070 | 513 | 4070 | **513** | **4070** | 208 | 513 | 4070 | 513 | 4070 | **513** | **4070** |
| 507.cactuBSSN_r | 208 | **270** | **976** | 271 | 972 | 270 | 976 | 104 | **129** | **1020** | 129 | 1020 | 129 | 1020 |
| 508.namd_r | 208 | 273 | 723 | **273** | **724** | 273 | 725 | 208 | 273 | 723 | **273** | **724** | 273 | 725 |
| 510.parest_r | 208 | 1380 | 394 | 1384 | 393 | **1382** | **394** | 104 | 436 | 623 | **436** | **623** | 433 | 628 |
| 511.povray_r | 208 | **420** | **1160** | 422 | 1150 | 418 | 1160 | 208 | **420** | **1160** | 422 | 1150 | 418 | 1160 |
| 519.lbm_r | 208 | 589 | 372 | **588** | **373** | 588 | 373 | 208 | 589 | 372 | **588** | **373** | 588 | 373 |
| 521.wrf_r | 208 | 809 | 576 | 807 | 577 | **808** | **577** | 104 | 359 | 648 | **359** | **648** | 360 | 648 |
| 526.blender_r | 208 | **305** | **1040** | 305 | 1040 | 305 | 1040 | 208 | **305** | **1040** | 305 | 1040 | 305 | 1040 |
| 527.cam4_r | 208 | **344** | **1060** | 345 | 1050 | 344 | 1060 | 208 | **344** | **1060** | 345 | 1050 | 344 | 1060 |
| 538.imagick_r | 208 | 176 | 2950 | **175** | **2950** | 175 | 2950 | 208 | 176 | 2950 | **175** | **2950** | 175 | 2950 |
| 544.nab_r | 208 | 190 | 1840 | 191 | 1840 | **191** | **1840** | 208 | 165 | 2120 | **165** | **2120** | 165 | 2120 |
| 549.fotonik3d_r | 208 | 1512 | 536 | 1508 | 538 | **1509** | **537** | 208 | 1512 | 536 | 1508 | 538 | **1509** | **537** |
| 554.roms_r | 208 | 1084 | 305 | **1088** | **304** | 1089 | 303 | 104 | 487 | 339 | 491 | 337 | **488** | **338** |

**SPECrate®2017_fp_base = 905**

**SPECrate®2017_fp_peak = 968**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

## General Notes

```
 Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

## Platform Notes

```
The system ROM used for this result contains Intel microcode version 0x2b000161 for
the Intel Xeon Platinum 8470 processor.
BIOS Configuration:
 Workload Profile set to General Throughput Compute
 Thermal Configuration set to Maximum Cooling
 Enhanced Processor Performance Profile set to Aggressive
 Last Level Cache (LLC) Dead Line Allocation set to Disabled
 Memory Patrol Scrubbing set to Disabled
 Workload Profile set to Custom
  DCU Stream Prefetcher set to Disabled
  Adjacent Sector Prefetch set to Disabled
  Minimum Processor Idle Power Package C-State set to Package C6 (non-retention) State

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost.localdomain Sat Feb  4 03:33:38 2023

 SUT (System Under Test) info as seen by some common utilities.

 ----------------------------------------------------------
 Table of contents
 ----------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
```

**(Continued on next page)**

## Platform Notes (Continued)

```
 11. Systemd service manager version: systemd 250 (250-6.el9_0)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
  x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   03:33:38 up 15 min,  0 users,  load average: 0.00, 0.00, 0.00
  USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
  core file size              (blocks, -c) 0
  data seg size               (kbytes, -d) unlimited
  scheduling priority                 (-e) 0
  file size                   (blocks, -f) unlimited
  pending signals                     (-i) 4127055
  max locked memory           (kbytes, -l) 64
  max memory size             (kbytes, -m) unlimited
  open files                          (-n) 1024
  pipe size                (512 bytes, -p) 8
  POSIX message queues         (bytes, -q) 819200
  real-time priority                  (-r) 0
  stack size                  (kbytes, -s) unlimited
  cpu time                   (seconds, -t) unlimited
  max user processes                  (-u) 4127055
  virtual memory              (kbytes, -v) unlimited
```

**(Continued on next page)**

## Platform Notes (Continued)

```
   file locks                              (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 30
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
 sshd: root@notty
 bash -c cd $SPEC/ && $SPEC/fprate.sh
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=208 -c
   ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=104 --define physicalfirst
    --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=208 --configfile
   ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=104 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
    --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
    $SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Platinum 8470
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
    stepping        : 6
    microcode       : 0x2b000161
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 52
    siblings        : 104
    2 physical ids (chips)
    208 processors (hardware threads)
    physical id 0: core ids 0-51
    physical id 1: core ids 0-51
    physical id 0: apicids 0-103
    physical id 1: apicids 128-231
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   46 bits physical, 57 bits virtual
```

**(Continued on next page)**

## Platform Notes (Continued)

```
Byte Order:                      Little Endian
CPU(s):                          208
On-line CPU(s) list:             0-207
Vendor ID:                       GenuineIntel
BIOS Vendor ID:                  Intel(R) Corporation
Model name:                      Intel(R) Xeon(R) Platinum 8470
BIOS Model name:                 Intel(R) Xeon(R) Platinum 8470
CPU family:                      6
Model:                           143
Thread(s) per core:              2
Core(s) per socket:              52
Socket(s):                       2
Stepping:                        6
BogoMIPS:                        4000.00
Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                 lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                 nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                 lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                 invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                                 vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
                                 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                                 clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                                 xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                 split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                                 avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                                 avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                                 cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                                 arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
Virtualization:                  VT-x
L1d cache:                       4.9 MiB (104 instances)
L1i cache:                       3.3 MiB (104 instances)
L2 cache:                        208 MiB (104 instances)
L3 cache:                        210 MiB (2 instances)
NUMA node(s):                    8
NUMA node0 CPU(s):               0-12,104-116
NUMA node1 CPU(s):               13-25,117-129
NUMA node2 CPU(s):               26-38,130-142
NUMA node3 CPU(s):               39-51,143-155
NUMA node4 CPU(s):               52-64,156-168
NUMA node5 CPU(s):               65-77,169-181
NUMA node6 CPU(s):               78-90,182-194
NUMA node7 CPU(s):               91-103,195-207
Vulnerability Itlb multihit:     Not affected
Vulnerability L1tf:              Not affected
```

**(Continued on next page)**

## Platform Notes (Continued)

```
   Vulnerability Mds:                Not affected
   Vulnerability Meltdown:           Not affected
   Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
   Vulnerability Spectre v1:       Mitigation; usercopy/swapgs barriers and __user pointer sanitization
   Vulnerability Spectre v2:       Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
   Vulnerability Srbds:              Not affected
   Vulnerability Tsx async abort:    Not affected

 From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
      L1d       48K     4.9M   12 Data            1     64        1             64
      L1i       32K     3.3M    8 Instruction     1     64        1             64
      L2         2M     208M   16 Unified         2   2048        1             64
      L3       105M     210M   15 Unified         3 114688        1             64

 ------------------------------------------------------------
 8. numactl --hardware
 NOTE: a numactl 'node' might or might not correspond to a physical chip.
   available: 8 nodes (0-7)
   node 0 cpus: 0-12,104-116
   node 0 size: 128731 MB
   node 0 free: 128207 MB
   node 1 cpus: 13-25,117-129
   node 1 size: 129018 MB
   node 1 free: 128511 MB
   node 2 cpus: 26-38,130-142
   node 2 size: 128981 MB
   node 2 free: 128601 MB
   node 3 cpus: 39-51,143-155
   node 3 size: 129018 MB
   node 3 free: 128609 MB
   node 4 cpus: 52-64,156-168
   node 4 size: 129018 MB
   node 4 free: 127745 MB
   node 5 cpus: 65-77,169-181
   node 5 size: 129018 MB
   node 5 free: 128493 MB
   node 6 cpus: 78-90,182-194
   node 6 size: 129018 MB
   node 6 free: 128638 MB
   node 7 cpus: 91-103,195-207
   node 7 size: 128998 MB
   node 7 free: 128610 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  20  30  30  30  30  30  30
     1:  20  10  30  30  30  30  30  30
```

**(Continued on next page)**

## Platform Notes (Continued)

```
     2:  30  30  10  20  30  30  30  30
     3:  30  30  20  10  30  30  30  30
     4:  30  30  30  30  10  20  30  30
     5:  30  30  30  30  20  10  30  30
     6:  30  30  30  30  30  30  10  20
     7:  30  30  30  30  30  30  20  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1056566984 kB

------------------------------------------------------------
10. who -r
  run-level 3 Feb 4 03:18

------------------------------------------------------------
11. Systemd service manager version: systemd 250 (250-6.el9_0)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
                     dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode
                       nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd
                       systemd-network-generator tuned udisks2
  enabled-runtime  systemd-remount-fs
  disabled         blk-availability chrony-wait console-getty cpupower debug-shell kvm_stat
                   man-db-restart-cache-update nftables rdisc rhsm rhsm-facts rpmdb-rebuild serial-getty@
                     sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext
  indirect           sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
  root=/dev/mapper/rhel-root
  ro
  resume=/dev/mapper/rhel-swap
  rd.lvm.lv=rhel/root
  rd.lvm.lv=rhel/swap

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    Unable to determine current policy
    boost state support:
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      Supported: yes
      Active: yes

------------------------------------------------------------
15. tuned-adm active
  Current active profile: throughput-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     40
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      10
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
```

**(Continued on next page)**

## Platform Notes (Continued)

```
 19. OS release
   From /etc/*-release /etc/*-version
   os-release     Red Hat Enterprise Linux 9.0 (Plow)
   redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
   system-release Red Hat Enterprise Linux release 9.0 (Plow)

 ------------------------------------------------------------
 20. Disk information
 SPEC is set to: /home/cpu2017
   Filesystem            Type  Size  Used Avail Use% Mounted on
   /dev/mapper/rhel-home xfs   819G  110G  709G  14% /home

 ------------------------------------------------------------
 21. /sys/devices/virtual/dmi/id
     Vendor:         HPE
     Product:        ProLiant DL360 Gen11
     Product Family: ProLiant
     Serial:         CNX20800PW

 ------------------------------------------------------------
 22. dmidecode
   Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
   Memory:
     16x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       HPE
    BIOS Version:      1.22
    BIOS Date:         01/18/2023
    BIOS Revision:     1.22
    Firmware Revision: 1.10
```

## Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

## Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64

**(Continued on next page)**

## Base Portability Flags (Continued)

554.roms_r: `-DSPEC_LP64`

## Base Optimization Flags

C benchmarks:
`-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

C++ benchmarks:
`-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Fortran benchmarks:
`-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using both Fortran and C:
`-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using both C and C++:
`-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using Fortran, C, and C++:
`-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

## Peak Compiler Invocation

C benchmarks:
`icx`

**(Continued on next page)**

## Peak Compiler Invocation (Continued)

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -qopt-zmm-usage=high -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

**(Continued on next page)**

## Peak Optimization Flags (Continued)

Fortran benchmarks:

503.bwaves_r: `basepeak = yes`

549.fotonik3d_r: `basepeak = yes`

554.roms_r: `-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using both Fortran and C:

521.wrf_r: `-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

527.cam4_r: `basepeak = yes`

Benchmarks using both C and C++:

511.povray_r: `basepeak = yes`

526.blender_r: `basepeak = yes`

Benchmarks using Fortran, C, and C++:
`-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.1.html
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.1.xml
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-02-03 17:03:38-0500.
Report generated on 2023-03-29 00:37:10 by CPU2017 PS formatter v6442.
Originally published on 2023-03-28.