SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12
(2.40 GHz, AMD EPYC 9654)

SPECspeed®2017_fp_base = 449

SPECspeed®2017_fp_peak = 468

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Feb-2023
Hardware Availability: Dec-2022
Software Availability: Nov-2022

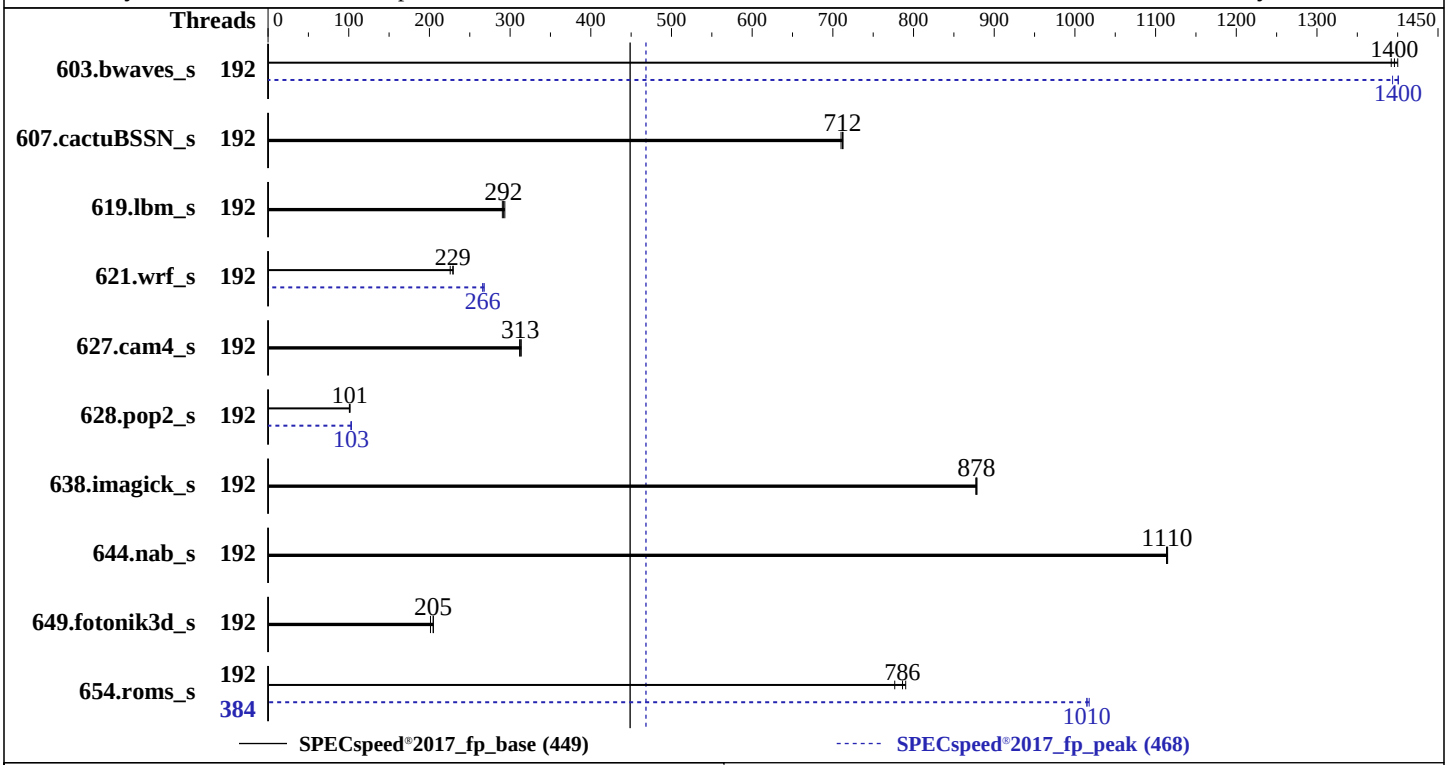

Hardware

CPU Name:	AMD EPYC 9654
Max MHz:	3700
Nominal:	2400
Enabled:	192 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	384 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 4.0 TB PCIE NVME SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP4 (x86_64) Kernel 5.14.21-150400.22-default
Compiler:	C/C++/Fortran: Version 4.0.0 of AOCC
Parallel:	Yes
Firmware:	Version 0602 released Dec-2022
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	192	42.1	1400	**42.3**	**1400**	42.4	1390	192	42.1	1400	42.3	1390	**42.1**	**1400**
607.cactuBSSN_s	192	23.4	713	23.5	710	**23.4**	**712**	192	23.4	713	23.5	710	**23.4**	**712**
619.lbm_s	192	18.0	290	17.8	293	**17.9**	**292**	192	18.0	290	17.8	293	**17.9**	**292**
621.wrf_s	192	**57.8**	**229**	58.6	226	57.6	230	192	49.4	268	**49.7**	**266**	49.7	266
627.cam4_s	192	28.2	314	**28.3**	**313**	28.4	312	192	28.2	314	**28.3**	**313**	28.4	312
628.pop2_s	192	117	102	118	101	**117**	**101**	192	115	103	**115**	**103**	116	103
638.imagick_s	192	16.4	877	**16.4**	**878**	16.4	879	192	16.4	877	**16.4**	**878**	16.4	879
644.nab_s	192	**15.7**	**1110**	15.7	1110	15.7	1110	192	**15.7**	**1110**	15.7	1110	15.7	1110
649.fotonik3d_s	192	**44.5**	**205**	45.3	201	44.5	205	192	**44.5**	**205**	45.3	201	44.5	205
654.roms_s	192	**20.0**	**786**	20.3	777	19.9	790	384	15.5	1020	15.5	1010	**15.5**	**1010**

SPECspeed®2017_fp_base = 449

SPECspeed®2017_fp_peak = 468

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
 OS set to performance mode via cpupower frequency-set -g performance
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
```

(Continued on next page)

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To always enable THP for peak runs of:
603.bwaves_s, 607.cactuBSSN_s, 619.lbm_s, 627.cam4_s, 628.pop2_s, 638.imagick_s, 644.nab_s, 649.fotonik3d_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
To disable THP for peak runs of 621.wrf_s:
'echo never > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
To enable THP only on request for peak runs of 654.roms_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-383"
LD_LIBRARY_PATH = "/cpu119/amd_speed_aocc400_genoa_B_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "384"

Environment variables set by runcpu during the 603.bwaves_s peak run:
GOMP_CPU_AFFINITY = "0-191"

Environment variables set by runcpu during the 621.wrf_s peak run:
GOMP_CPU_AFFINITY = "0-191"

Environment variables set by runcpu during the 628.pop2_s peak run:
GOMP_CPU_AFFINITY = "0-191"

Environment variables set by runcpu during the 654.roms_s peak run:
GOMP_CPU_AFFINITY = "0 192 1 193 2 194 3 195 4 196 5 197 6 198 7 199 8 200 9
     201 10 202 11 203 12 204 13 205 14 206 15 207 16 208 17 209 18 210 19
     211 20 212 21 213 22 214 23 215 24 216 25 217 26 218 27 219 28 220 29
     221 30 222 31 223 32 224 33 225 34 226 35 227 36 228 37 229 38 230 39
     231 40 232 41 233 42 234 43 235 44 236 45 237 46 238 47 239 48 240 49
     241 50 242 51 243 52 244 53 245 54 246 55 247 56 248 57 249 58 250 59
     251 60 252 61 253 62 254 63 255 64 256 65 257 66 258 67 259 68 260 69
     261 70 262 71 263 72 264 73 265 74 266 75 267 76 268 77 269 78 270 79
     271 80 272 81 273 82 274 83 275 84 276 85 277 86 278 87 279 88 280 89
     281 90 282 91 283 92 284 93 285 94 286 95 287 96 288 97 289 98 290 99
```

(Continued on next page)

Environment Variables Notes (Continued)

```
291 100 292 101 293 102 294 103 295 104 296 105 297 106 298 107 299 108
300 109 301 110 302 111 303 112 304 113 305 114 306 115 307 116 308 117
309 118 310 119 311 120 312 121 313 122 314 123 315 124 316 125 317 126
318 127 319 128 320 129 321 130 322 131 323 132 324 133 325 134 326 135
327 136 328 137 329 138 330 139 331 140 332 141 333 142 334 143 335 144
336 145 337 146 338 147 339 148 340 149 341 150 342 151 343 152 344 153
345 154 346 155 347 156 348 157 349 158 350 159 351 160 352 161 353 162
354 163 355 164 356 165 357 166 358 167 359 168 360 169 361 170 362 171
363 172 364 173 365 174 366 175 367 176 368 177 369 178 370 179 371 180
372 181 373 182 374 183 375 184 376 185 377 186 378 187 379 188 380 189
381 190 382 191 383"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Configuration:
SR-IOV Support = Disabled
SVM Mode = Disabled
NUMA nodes per socket = NPS1
Determinism Control = Manual
Determinism Enable = Power
Engine Boost = Aggressive
TDP Control = Manual
TDP = 400
PPT Control = Manual
PPT = 400
BMC Configuration:
Fan mode = Full speed mode

 Sysinfo program /cpu119/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Fri Feb 17 20:45:16 2023

 SUT (System Under Test) info as seen by some common utilities.
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
   x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
    20:45:16 up  3:38,  2 users,  load average: 63.44, 171.97, 195.40
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                17:09    3:35m  1.27s  0.21s /bin/bash ./amd_speed_aocc400_genoa_B1.sh
   root     tty2     -                17:53    2:52m  0.02s  0.02s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
```


(Continued on next page)

Platform Notes (Continued)

```
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
   scheduling priority             (-e) 0
   file size               (blocks, -f) unlimited
   pending signals                 (-i) 6190547
   max locked memory       (kbytes, -l) 2097152
   max memory size         (kbytes, -m) unlimited
   open files                      (-n) 1024
   pipe size            (512 bytes, -p) 8
   POSIX message queues     (bytes, -q) 819200
   real-time priority              (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time               (seconds, -t) unlimited
   max user processes              (-u) 6190547
   virtual memory          (kbytes, -v) unlimited
   file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 30
 login -- root
 -bash
 /bin/bash ./speed.sh
 python3 ./run_amd_speed_aocc400_genoa_B1.py
 /bin/bash ./amd_speed_aocc400_genoa_B1.sh
 runcpu --config amd_speed_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 fpspeed
 runcpu --configfile amd_speed_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.139/templogs/preenv.fpspeed.139.0.log --lognum 139.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /cpu119

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9654 96-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 25
    model           : 17
    stepping        : 1
    microcode       : 0xa101111
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 3584 4K pages
    cpu cores       : 96
    siblings        : 192
    2 physical ids (chips)
    384 processors (hardware threads)
    physical id 0: core ids 0-95
```

(Continued on next page)

Platform Notes (Continued)

```
     physical id 1: core ids 0-95
     physical id 0: apicids 0-191
     physical id 1: apicids 256-447
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
    virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.37.2:
   Architecture:                    x86_64
   CPU op-mode(s):                  32-bit, 64-bit
   Address sizes:                   52 bits physical, 57 bits virtual
   Byte Order:                      Little Endian
   CPU(s):                          384
   On-line CPU(s) list:             0-383
   Vendor ID:                       AuthenticAMD
   Model name:                      AMD EPYC 9654 96-Core Processor
   CPU family:                      25
   Model:                           17
   Thread(s) per core:              2
   Core(s) per socket:              96
   Socket(s):                       2
   Stepping:                        1
   Frequency boost:                 enabled
   CPU max MHz:                     3707.8120
   CPU min MHz:                     1500.0000
   BogoMIPS:                        4792.69
   Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                    clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                                    constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                                    pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                                    popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                                    abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                                    perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                                    invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                                    avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                    avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                    xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                    avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                                    svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                                    pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                                    umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                    avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
   Virtualization:                  AMD-V
   L1d cache:                       6 MiB (192 instances)
   L1i cache:                       6 MiB (192 instances)
```

(Continued on next page)

Platform Notes (Continued)

```
  L2 cache:                        192 MiB (192 instances)
  L3 cache:                        768 MiB (24 instances)
  NUMA node(s):                    2
  NUMA node0 CPU(s):               0-95,192-287
  NUMA node1 CPU(s):               96-191,288-383
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
                                   filling
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       32K       6M    8 Data            1    64        1             64
     L1i       32K       6M    8 Instruction     1    64        1             64
     L2         1M     192M    8 Unified         2  2048        1             64
     L3        32M     768M   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 2 nodes (0-1)
  node 0 cpus: 0-95,192-287
  node 0 size: 773817 MB
  node 0 free: 769718 MB
  node 1 cpus: 96-191,288-383
  node 1 size: 773843 MB
  node 1 free: 772841 MB
  node distances:
  node   0   1
    0:  10  32
    1:  32  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1584804744 kB

------------------------------------------------------------
10. who -r
  run-level 3 Feb 17 17:08

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged
                   irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections
                   postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4
                       wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                    chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
                   firewalld gpm grub2-once haveged-switch-root ipmi ipmievd issue-add-ssh-keys kexec-load
                     lunmask man-db-create multipathd nfs nfs-blkmap nvmf-autoconnect rdisc rpcbind
                    rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd svnserve
                      systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                       systemd-time-wait-sync systemd-timesyncd tuned udisks2
  indirect         wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
  root=UUID=bd4eeb48-8f2c-47c9-ae06-b7241b1d0eb7
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 1.50 GHz and 2.40 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. tuned-adm active
  It seems that tuned daemon is not running, preset profile is not activated.
  Preset profile: throughput-performance

------------------------------------------------------------
16. sysctl
```

(Continued on next page)

Platform Notes (Continued)

```
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         always [madvise] never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP4

------------------------------------------------------------
20. Disk information
SPEC is set to: /cpu119
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme0n1p4 xfs   2.0T   52G  2.0T   3% /
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         ASUSTeK COMPUTER INC.
    Product:        RS720A-E12-RS12
    Product Family: Server
    Serial:         123456789012

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     24x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       American Megatrends Inc.
   BIOS Version:      0602
   BIOS Date:         12/09/2022
   BIOS Revision:     6.2
```

Compiler Version Notes

```
==============================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
                | 644.nab_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
```

(Continued on next page)

Compiler Version Notes (Continued)

```
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                | 654.roms_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                | 628.pop2_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

(Continued on next page)

Base Compiler Invocation (Continued)

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

Benchmarks using Fortran, C, and C++:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

Base Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:
-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:
-Wno-return-type -Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

(Continued on next page)

Peak Compiler Invocation (Continued)

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -Mrecursive -mllvm -reduce-array-computations=3
-fvector-transform -fscalar-transform -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

649.fotonik3d_s: basepeak = yes

654.roms_s: Same as 603.bwaves_s

Benchmarks using both Fortran and C:

621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast

(Continued on next page)

Peak Optimization Flags (Continued)

621.wrf_s (continued):
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-O3 -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

627.cam4_s: basepeak = yes

628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fvector-transform -fscalar-transform
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

Peak Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:
-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:
-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-K14-V1.0.html
http://www.spec.org/cpu2017/flags/aocc400-flags.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-K14-V1.0.xml
http://www.spec.org/cpu2017/flags/aocc400-flags.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-02-17 07:45:16-0500.
Report generated on 2023-03-29 00:38:30 by CPU2017 PS formatter v6442.
Originally published on 2023-03-28.