SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-681E-TR
(X13OEI, Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 3540

SPECrate®2017_fp_peak = 3560

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

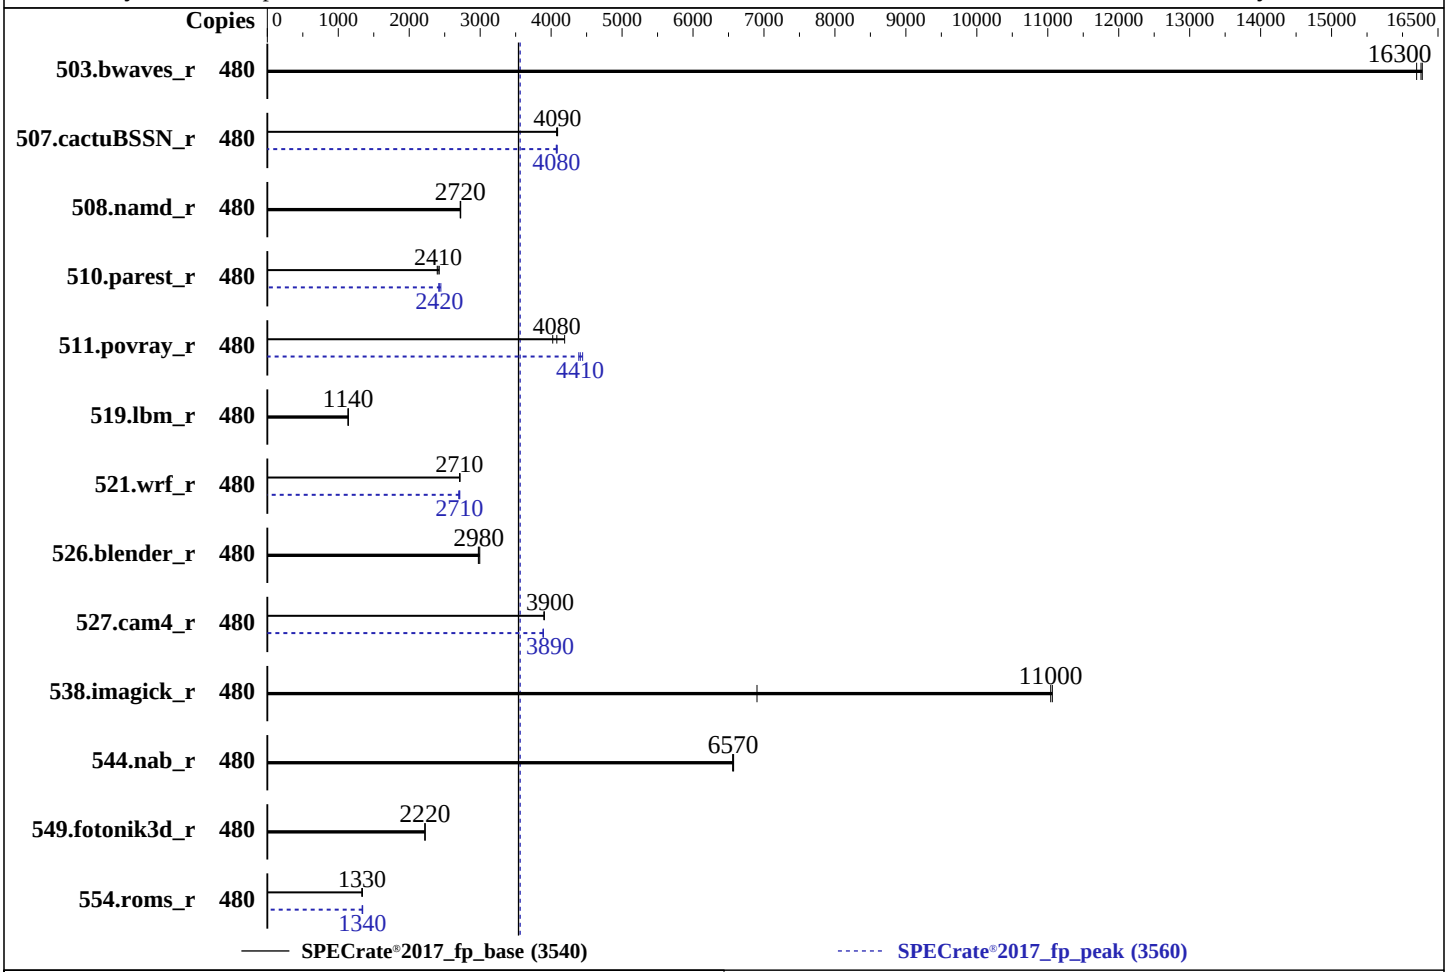

Hardware

CPU Name:	Intel Xeon Platinum 8490H
Max MHz:	3500
Nominal:	1900
Enabled:	480 cores, 8 chips
Orderable:	1,2,4,8 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	112.5 MB I+D on chip per chip
Other:	None
Memory:	4 TB (64 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 800 GB NVMe SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default
Compiler:	C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 1.0a released May-2023 tested as Mar-2023
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	480	297	16200	296	16300	**296**	**16300**	480	297	16200	296	16300	**296**	**16300**
507.cactuBSSN_r	480	**149**	**4090**	149	4080	149	4090	480	149	4070	149	4090	**149**	**4080**
508.namd_r	480	167	2730	**168**	**2720**	168	2720	480	167	2730	**168**	**2720**	168	2720
510.parest_r	480	**522**	**2410**	518	2420	524	2390	480	513	2450	**518**	**2420**	520	2420
511.povray_r	480	267	4190	279	4020	**275**	**4080**	480	252	4440	255	4390	**254**	**4410**
519.lbm_r	480	444	1140	444	1140	**444**	**1140**	480	444	1140	444	1140	**444**	**1140**
521.wrf_r	480	**397**	**2710**	397	2710	396	2720	480	399	2700	397	2710	**397**	**2710**
526.blender_r	480	244	2990	**245**	**2980**	246	2970	480	244	2990	**245**	**2980**	246	2970
527.cam4_r	480	215	3900	215	3900	**215**	**3900**	480	216	3890	**216**	**3890**	216	3890
538.imagick_r	480	108	11100	173	6900	**108**	**11000**	480	108	11100	173	6900	**108**	**11000**
544.nab_r	480	**123**	**6570**	123	6570	123	6560	480	**123**	**6570**	123	6570	123	6560
549.fotonik3d_r	480	842	2220	841	2220	**842**	**2220**	480	842	2220	841	2220	**842**	**2220**
554.roms_r	480	569	1340	**572**	**1330**	572	1330	480	**569**	**1340**	567	1340	570	1340

SPECrate®2017_fp_base = 3540

SPECrate®2017_fp_peak = 3560

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/root/cpu2017-1.1.9/lib/intel64:/root/cpu2017-1.1.9/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
```

(Continued on next page)

General Notes (Continued)

```
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the
system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the
system as tested and documented.
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the
system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Settings:
Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Max Performance
SNC = Enable SNC4 (4-Clusters)
KTI Prefetch = Enable
LLC Dead Line Alloc = Disable
DCU Streamer Prefetcher = Disable
Hyper-Threading [ALL] = Disable

 Sysinfo program /root/cpu2017-1.1.9/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Tue Mar 21 19:25:20 2023

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
 12. Services, from systemctl list-unit-files
```

(Continued on next page)

Platform Notes (Continued)

```
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   19:25:20 up 13 min,  1 user,  load average: 0.56, 1.72, 2.82
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                19:13   16.00s  1.56s  0.06s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 16512517
  max locked memory       (kbytes, -l) 64
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 16512517
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
 5. sysinfo process ancestry
  /usr/lib/systemd/systemd --switched-root --system --deserialize 30
  login -- root
  -bash
  -bash
  runcpu --nobuild --action validate --define default-platform-flags --define numcopies=480 -c
    ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define cores=480 --define physicalfirst --define
    invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
  runcpu --nobuild --action validate --define default-platform-flags --define numcopies=480 --configfile
    ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define cores=480 --define physicalfirst --define
    invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower --runmode rate
    --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
    $SPEC/tmp/CPU2017.003/templogs/preenv.fprate.003.0.log --lognum 003.0 --from_runcpu 2
  specperl $SPEC/bin/sysinfo
 $SPEC = /root/cpu2017-1.1.9

------------------------------------------------------------
 6. /proc/cpuinfo
     model name      : Intel(R) Xeon(R) Platinum 8490H
     vendor_id       : GenuineIntel
     cpu family      : 6
     model           : 143
     stepping        : 6
     microcode       : 0x2b0001b0
     bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
     cpu cores       : 60
     siblings        : 60
     8 physical ids (chips)
     480 processors (hardware threads)
     physical id 0: core ids 0-59
     physical id 1: core ids 0-59
     physical id 2: core ids 0-59
     physical id 3: core ids 0-59
     physical id 4: core ids 0-59
     physical id 5: core ids 0-59
     physical id 6: core ids 0-59
     physical id 7: core ids 0-59
     physical id 0: apicids
    0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
     ,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118
     physical id 1: apicids
    128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
    80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,23
     2,234,236,238,240,242,244,246
     physical id 2: apicids
    256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,3
    08,310,312,314,316,318,320,322,324,326,328,330,332,334,336,338,340,342,344,346,348,350,352,354,356,358,36
```

(Continued on next page)

Platform Notes (Continued)

```
     0,362,364,366,368,370,372,374
     physical id 3: apicids
    384,386,388,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418,420,422,424,426,428,430,432,434,4
    36,438,440,442,444,446,448,450,452,454,456,458,460,462,464,466,468,470,472,474,476,478,480,482,484,486,48
     8,490,492,494,496,498,500,502
     physical id 4: apicids
    512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,5
    64,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606,608,610,612,614,61
     6,618,620,622,624,626,628,630
     physical id 5: apicids
    640,642,644,646,648,650,652,654,656,658,660,662,664,666,668,670,672,674,676,678,680,682,684,686,688,690,6
    92,694,696,698,700,702,704,706,708,710,712,714,716,718,720,722,724,726,728,730,732,734,736,738,740,742,74
     4,746,748,750,752,754,756,758
     physical id 6: apicids
    768,770,772,774,776,778,780,782,784,786,788,790,792,794,796,798,800,802,804,806,808,810,812,814,816,818,8
    20,822,824,826,828,830,832,834,836,838,840,842,844,846,848,850,852,854,856,858,860,862,864,866,868,870,87
     2,874,876,878,880,882,884,886
     physical id 7: apicids
    896,898,900,902,904,906,908,910,912,914,916,918,920,922,924,926,928,930,932,934,936,938,940,942,944,946,9
    48,950,952,954,956,958,960,962,964,966,968,970,972,974,976,978,980,982,984,986,988,990,992,994,996,998,10
     00,1002,1004,1006,1008,1010,1012,1014
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.2:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   52 bits physical, 57 bits virtual
  Byte Order:                      Little Endian
  CPU(s):                          480
  On-line CPU(s) list:             0-479
  Vendor ID:                       GenuineIntel
  Model name:                      Intel(R) Xeon(R) Platinum 8490H
  CPU family:                      6
  Model:                           143
  Thread(s) per core:              1
  Core(s) per socket:              60
  Socket(s):                       8
  Stepping:                        6
  Frequency boost:                 enabled
  CPU max MHz:                     1901.0000
  CPU min MHz:                     800.0000
  BogoMIPS:                        3800.00
  Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
```

(Continued on next page)

Platform Notes (Continued)

```
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
   lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
  ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
   lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
   bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
 avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
  xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
 arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
  vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
```

```
Virtualization:                  VT-x
L1d cache:                       22.5 MiB (480 instances)
L1i cache:                       15 MiB (480 instances)
L2 cache:                        960 MiB (480 instances)
L3 cache:                        900 MiB (8 instances)
NUMA node(s):                    32
NUMA node0 CPU(s):               0-14
NUMA node1 CPU(s):               15-29
NUMA node2 CPU(s):               30-44
NUMA node3 CPU(s):               45-59
NUMA node4 CPU(s):               60-74
NUMA node5 CPU(s):               75-89
NUMA node6 CPU(s):               90-104
NUMA node7 CPU(s):               105-119
NUMA node8 CPU(s):               120-134
NUMA node9 CPU(s):               135-149
NUMA node10 CPU(s):              150-164
NUMA node11 CPU(s):              165-179
NUMA node12 CPU(s):              180-194
NUMA node13 CPU(s):              195-209
NUMA node14 CPU(s):              210-224
NUMA node15 CPU(s):              225-239
NUMA node16 CPU(s):              240-254
NUMA node17 CPU(s):              255-269
NUMA node18 CPU(s):              270-284
NUMA node19 CPU(s):              285-299
NUMA node20 CPU(s):              300-314
NUMA node21 CPU(s):              315-329
NUMA node22 CPU(s):              330-344
NUMA node23 CPU(s):              345-359
NUMA node24 CPU(s):              360-374
```

(Continued on next page)

Platform Notes (Continued)

```
   NUMA node25 CPU(s):                375-389
   NUMA node26 CPU(s):                390-404
   NUMA node27 CPU(s):                405-419
   NUMA node28 CPU(s):                420-434
   NUMA node29 CPU(s):                435-449
   NUMA node30 CPU(s):                450-464
   NUMA node31 CPU(s):                465-479
   Vulnerability Itlb multihit:       Not affected
   Vulnerability L1tf:                Not affected
   Vulnerability Mds:                 Not affected
   Vulnerability Meltdown:            Not affected
   Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
   Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
   Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
   Vulnerability Srbds:               Not affected
   Vulnerability Tsx async abort:     Not affected

  From lscpu --cache:
       NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
       L1d       48K    22.5M   12 Data            1     64        1             64
       L1i       32K      15M    8 Instruction     1     64        1             64
       L2         2M     960M   16 Unified         2   2048        1             64
       L3     112.5M     900M   15 Unified         3 122880        1             64

  ------------------------------------------------------------
  8. numactl --hardware
  NOTE: a numactl 'node' might or might not correspond to a physical chip.
    available: 32 nodes (0-31)
    node 0 cpus: 0-14
    node 0 size: 128648 MB
    node 0 free: 127457 MB
    node 1 cpus: 15-29
    node 1 size: 129020 MB
    node 1 free: 128604 MB
    node 2 cpus: 30-44
    node 2 size: 129020 MB
    node 2 free: 128720 MB
    node 3 cpus: 45-59
    node 3 size: 129020 MB
    node 3 free: 128689 MB
    node 4 cpus: 60-74
    node 4 size: 129020 MB
    node 4 free: 128861 MB
    node 5 cpus: 75-89
    node 5 size: 129020 MB
    node 5 free: 128882 MB
    node 6 cpus: 90-104
```

(Continued on next page)

Platform Notes (Continued)

```
node 6 size: 129020 MB
node 6 free: 128863 MB
node 7 cpus: 105-119
node 7 size: 129020 MB
node 7 free: 128874 MB
node 8 cpus: 120-134
node 8 size: 129020 MB
node 8 free: 128538 MB
node 9 cpus: 135-149
node 9 size: 129020 MB
node 9 free: 128226 MB
node 10 cpus: 150-164
node 10 size: 129020 MB
node 10 free: 128499 MB
node 11 cpus: 165-179
node 11 size: 129020 MB
node 11 free: 128595 MB
node 12 cpus: 180-194
node 12 size: 129020 MB
node 12 free: 128655 MB
node 13 cpus: 195-209
node 13 size: 129020 MB
node 13 free: 128692 MB
node 14 cpus: 210-224
node 14 size: 129020 MB
node 14 free: 128642 MB
node 15 cpus: 225-239
node 15 size: 129020 MB
node 15 free: 128722 MB
node 16 cpus: 240-254
node 16 size: 129020 MB
node 16 free: 128708 MB
node 17 cpus: 255-269
node 17 size: 129020 MB
node 17 free: 128725 MB
node 18 cpus: 270-284
node 18 size: 129020 MB
node 18 free: 128746 MB
node 19 cpus: 285-299
node 19 size: 129020 MB
node 19 free: 128730 MB
node 20 cpus: 300-314
node 20 size: 128985 MB
node 20 free: 128829 MB
node 21 cpus: 315-329
node 21 size: 129020 MB
node 21 free: 128874 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node 22 cpus: 330-344
  node 22 size: 129020 MB
  node 22 free: 128896 MB
  node 23 cpus: 345-359
  node 23 size: 129020 MB
  node 23 free: 128899 MB
  node 24 cpus: 360-374
  node 24 size: 129020 MB
  node 24 free: 128897 MB
  node 25 cpus: 375-389
  node 25 size: 129020 MB
  node 25 free: 128896 MB
  node 26 cpus: 390-404
  node 26 size: 129020 MB
  node 26 free: 128901 MB
  node 27 cpus: 405-419
  node 27 size: 129020 MB
  node 27 free: 128900 MB
  node 28 cpus: 420-434
  node 28 size: 129020 MB
  node 28 free: 128729 MB
  node 29 cpus: 435-449
  node 29 size: 129020 MB
  node 29 free: 128740 MB
  node 30 cpus: 450-464
  node 30 size: 129020 MB
  node 30 free: 128740 MB
  node 31 cpus: 465-479
  node 31 size: 128937 MB
  node 31 free: 128638 MB
  node distances:
node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15  16  17  18  19  20  21  22  23  24
 25  26  27  28  29  30  31
  0:  10  12  12  12  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
   21  21  21  31  31  31  31
  1:  12  10  12  12  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
   21  21  21  31  31  31  31
  2:  12  12  10  12  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
   21  21  21  31  31  31  31
  3:  12  12  12  10  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
   21  21  21  31  31  31  31
  4:  21  21  21  21  10  12  12  12  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31
   31  31  31  21  21  21  21
  5:  21  21  21  21  12  10  12  12  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31
   31  31  31  21  21  21  21
  6:  21  21  21  21  12  12  10  12  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31
   31  31  31  21  21  21  21
```

(Continued on next page)

Platform Notes (Continued)

```
 7:  21  21  21  21  12  12  12  10  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31
  31  31  31  21  21  21  21
 8:  21  21  21  21  31  31  31  31  10  12  12  12  21  21  21  21  21  21  21  21  31  31  31  31  31
  31  31  31  21  21  21  21
 9:  21  21  21  21  31  31  31  31  12  10  12  12  21  21  21  21  21  21  21  21  31  31  31  31  31
  31  31  31  21  21  21  21
10:  21  21  21  21  31  31  31  31  12  12  10  12  21  21  21  21  21  21  21  21  31  31  31  31  31
  31  31  31  21  21  21  21
11:  21  21  21  21  31  31  31  31  12  12  12  10  21  21  21  21  21  21  21  21  31  31  31  31  31
  31  31  31  21  21  21  21
12:  31  31  31  31  21  21  21  21  21  21  21  21  10  12  12  12  31  31  31  31  21  21  21  21  21
  21  21  21  31  31  31  31
13:  31  31  31  31  21  21  21  21  21  21  21  21  12  10  12  12  31  31  31  31  21  21  21  21  21
  21  21  21  31  31  31  31
14:  31  31  31  31  21  21  21  21  21  21  21  21  12  12  10  12  31  31  31  31  21  21  21  21  21
  21  21  21  31  31  31  31
15:  31  31  31  31  21  21  21  21  21  21  21  21  12  12  12  10  31  31  31  31  21  21  21  21  21
  21  21  21  31  31  31  31
16:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  10  12  12  12  21  21  21  21  21
  21  21  21  31  31  31  31
17:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12  10  12  12  21  21  21  21  21
  21  21  21  31  31  31  31
18:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12  12  10  12  21  21  21  21  21
  21  21  21  31  31  31  31
19:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12  12  12  10  21  21  21  21  21
  21  21  21  31  31  31  31
20:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  10  12  12  12  31
  31  31  31  21  21  21  21
21:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  12  10  12  12  31
  31  31  31  21  21  21  21
22:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  12  12  10  12  31
  31  31  31  21  21  21  21
23:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  12  12  12  10  31
  31  31  31  21  21  21  21
24:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  10
  12  12  12  21  21  21  21
25:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12
  10  12  12  21  21  21  21
26:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12
  12  10  12  21  21  21  21
27:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12
  12  12  10  21  21  21  21
28:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
  21  21  21  10  12  12  12
29:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
  21  21  21  12  10  12  12
30:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
```

(Continued on next page)

Platform Notes (Continued)

```
    21  21  21  12  12  10  12
   31:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
    21  21  21  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       4227228692 kB

------------------------------------------------------------
10. who -r
  run-level 3 Mar 21 19:13

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE             UNIT FILES
  enabled         YaST2-Firstboot YaST2-Second-Stage apparmor auditd bluetooth cron display-manager getty@
                    haveged irqbalance iscsi issue-generator kbdsettings klog lvm2-monitor nscd
                  nvmefc-boot-connections postfix purge-kernels rollback rsyslog smartd sshd wicked
                    wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-fsck-root systemd-remount-fs
  disabled        accounts-daemon appstream-sync-cache autofs autoyast-initscripts blk-availability
                  bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups
                   cups-browsed debug-shell ebtables exchange-bmc-os-info firewalld gpm grub2-once
                haveged-switch-root ipmi ipmievd iscsi-init iscsid iscsiuio issue-add-ssh-keys kexec-load
                lunmask man-db-create multipathd nfs nfs-blkmap nmb nvmf-autoconnect ostree-remount rdisc
                rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd
                    snmptrapd speech-dispatcherd svnserve systemd-boot-check-no-failures
                systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
                    upower
  indirect          wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
  root=UUID=45b5dbe6-1d05-41ac-80df-f59bb33eace7
  splash=silent
  mitigations=auto
  quiet
  security=

------------------------------------------------------------
14. cpupower frequency-info
```

(Continued on next page)

Platform Notes (Continued)

```
  analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 1.90 GHz.
                    The governor "ondemand" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000
```

(Continued on next page)

Platform Notes (Continued)

```
 ------------------------------------------------------------
 18. OS release
   From /etc/*-release /etc/*-version
   os-release SUSE Linux Enterprise Server 15 SP4

 ------------------------------------------------------------
 19. Disk information
 SPEC is set to: /root/cpu2017-1.1.9
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/nvme1n1p2 ext4  732G  472G  224G  68% /

 ------------------------------------------------------------
 20. /sys/devices/virtual/dmi/id
     Vendor:         Supermicro
     Product:        Super Server
     Product Family: Family

 ------------------------------------------------------------
 21. dmidecode
   Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
      64x Micron Technology MTC40F2046S1RC48BA1 64 GB 2 rank 4800


 ------------------------------------------------------------
 22. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       American Megatrends International, LLC.
    BIOS Version:      1.0a
    BIOS Date:         03/16/2023
    BIOS Revision:     5.29
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2023.0.0 Build 20221201
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Benchmarks using both Fortran and C:
`ifx icx`

Benchmarks using both C and C++:
`icpx icx`

Benchmarks using Fortran, C, and C++:
`icpx icx ifx`

Base Portability Flags

503.bwaves_r: `-DSPEC_LP64`
507.cactuBSSN_r: `-DSPEC_LP64`
508.namd_r: `-DSPEC_LP64`
510.parest_r: `-DSPEC_LP64`
511.povray_r: `-DSPEC_LP64`
519.lbm_r: `-DSPEC_LP64`
521.wrf_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian`
526.blender_r: `-DSPEC_LP64 -DSPEC_LINUX -funsigned-char`
527.cam4_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG`
538.imagick_r: `-DSPEC_LP64`
544.nab_r: `-DSPEC_LP64`
549.fotonik3d_r: `-DSPEC_LP64`
554.roms_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:
```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:
```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:
```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:
```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:
```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:
```
icx
```

C++ benchmarks:
```
icpx
```

(Continued on next page)

Peak Compiler Invocation (Continued)

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

(Continued on next page)

Peak Optimization Flags (Continued)

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-21 22:25:19-0400.
Report generated on 2023-04-12 12:43:34 by CPU2017 PS formatter v6442.
Originally published on 2023-04-11.