SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-681E-TR
(X13OEI, Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_base = 261

SPECspeed®2017_fp_peak = 261

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

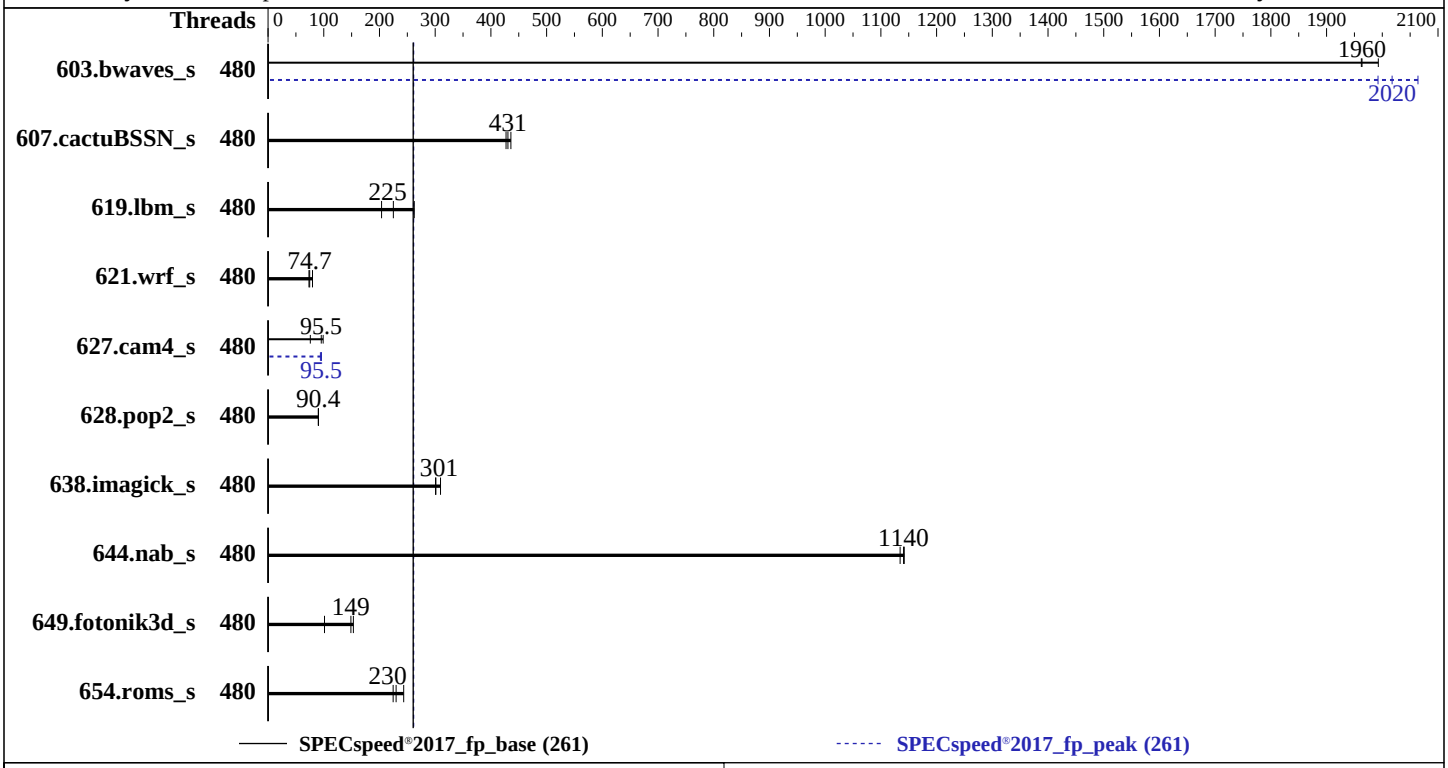

Hardware

CPU Name:	Intel Xeon Platinum 8490H
Max MHz:	3500
Nominal:	1900
Enabled:	480 cores, 8 chips
Orderable:	1,2,4,8 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	112.5 MB I+D on chip per chip
Other:	None
Memory:	4 TB (64 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 800 GB NVMe SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default
Compiler:	C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel:	Yes
Firmware:	Version 1.0a released May-2023 tested as Mar-2023
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	480	**30.0**	**1960**	29.6	1990	30.1	1960	480	**29.2**	**2020**	28.6	2060	29.6	1990
607.cactuBSSN_s	480	39.0	427	**38.7**	**431**	38.2	436	480	39.0	427	**38.7**	**431**	38.2	436
619.lbm_s	480	**23.3**	**225**	20.0	262	25.7	204	480	**23.3**	**225**	20.0	262	25.7	204
621.wrf_s	480	166	79.8	**177**	**74.7**	180	73.4	480	166	79.8	**177**	**74.7**	180	73.4
627.cam4_s	480	**92.8**	**95.5**	117	75.9	89.6	98.9	480	92.5	95.8	**92.8**	**95.5**	94.3	94.0
628.pop2_s	480	**131**	**90.4**	131	90.3	131	90.4	480	**131**	**90.4**	131	90.3	131	90.4
638.imagick_s	480	**47.9**	**301**	48.0	301	46.6	310	480	**47.9**	**301**	48.0	301	46.6	310
644.nab_s	480	15.4	1130	**15.3**	**1140**	15.3	1140	480	15.4	1130	**15.3**	**1140**	15.3	1140
649.fotonik3d_s	480	90.0	101	59.5	153	**61.3**	**149**	480	90.0	101	59.5	153	**61.3**	**149**
654.roms_s	480	**68.5**	**230**	64.7	243	70.1	225	480	**68.5**	**230**	64.7	243	70.1	225

SPECspeed®2017_fp_base = **261**

SPECspeed®2017_fp_peak = **261**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH =
     "/root/cpu2017-1.1.9/lib/intel64:/root/cpu2017-1.1.9/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
 Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Redhat Enterprise Linux 8.0
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the
system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the
system as tested and documented.
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the
system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
```

(Continued on next page)

General Notes (Continued)

sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

Platform Notes

```
BIOS Settings:
Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Performance
SNC = Enable SNC4 (4-Clusters)
KTI Prefetch = Enable
LLC Dead Line Alloc = Disable
DCU Streamer Prefetcher = Disable
Hyper-Threading [ALL] = Disable

 Sysinfo program /root/cpu2017-1.1.9/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Fri Mar 24 03:33:21 2023

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
 ------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
1. uname -a
  Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
   x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   03:33:21 up  4:13,  1 user,  load average: 4.65, 3.94, 2.35
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                23:25    4:08m  1.16s  0.01s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 16512517
  max locked memory       (kbytes, -l) 64
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 16512517
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 30
 login -- root
 -bash
 -bash
 runcpu --nobuild --action validate --define default-platform-flags -c
   ic2023.0-lin-core-avx512-speed-20221201.cfg --define cores=480 --tune base,peak -o all --define
   drop_caches fpspeed
 runcpu --nobuild --action validate --define default-platform-flags --configfile
   ic2023.0-lin-core-avx512-speed-20221201.cfg --define cores=480 --tune base,peak --output_format all
   --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
```

(Continued on next page)

Platform Notes (Continued)

```
   --note-preenv --logfile $SPEC/tmp/CPU2017.011/templogs/preenv.fpspeed.011.0.log --lognum 011.0
   --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /root/cpu2017-1.1.9

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Platinum 8490H
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
    stepping        : 6
    microcode       : 0x2b0001b0
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 60
    siblings        : 60
    8 physical ids (chips)
    480 processors (hardware threads)
    physical id 0: core ids 0-59
    physical id 1: core ids 0-59
    physical id 2: core ids 0-59
    physical id 3: core ids 0-59
    physical id 4: core ids 0-59
    physical id 5: core ids 0-59
    physical id 6: core ids 0-59
    physical id 7: core ids 0-59
    physical id 0: apicids
   0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
    ,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118
    physical id 1: apicids
   128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
   80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,23
    2,234,236,238,240,242,244,246
    physical id 2: apicids
   256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,3
   08,310,312,314,316,318,320,322,324,326,328,330,332,334,336,338,340,342,344,346,348,350,352,354,356,358,36
    0,362,364,366,368,370,372,374
    physical id 3: apicids
   384,386,388,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418,420,422,424,426,428,430,432,434,4
   36,438,440,442,444,446,448,450,452,454,456,458,460,462,464,466,468,470,472,474,476,478,480,482,484,486,48
    8,490,492,494,496,498,500,502
    physical id 4: apicids
   512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,5
   64,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606,608,610,612,614,61
    6,618,620,622,624,626,628,630
    physical id 5: apicids
   640,642,644,646,648,650,652,654,656,658,660,662,664,666,668,670,672,674,676,678,680,682,684,686,688,690,6
```

(Continued on next page)

Platform Notes (Continued)

```
    92,694,696,698,700,702,704,706,708,710,712,714,716,718,720,722,724,726,728,730,732,734,736,738,740,742,74
     4,746,748,750,752,754,756,758
     physical id 6: apicids
    768,770,772,774,776,778,780,782,784,786,788,790,792,794,796,798,800,802,804,806,808,810,812,814,816,818,8
    20,822,824,826,828,830,832,834,836,838,840,842,844,846,848,850,852,854,856,858,860,862,864,866,868,870,87
     2,874,876,878,880,882,884,886
     physical id 7: apicids
    896,898,900,902,904,906,908,910,912,914,916,918,920,922,924,926,928,930,932,934,936,938,940,942,944,946,9
    48,950,952,954,956,958,960,962,964,966,968,970,972,974,976,978,980,982,984,986,988,990,992,994,996,998,10
     00,1002,1004,1006,1008,1010,1012,1014
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.2:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   52 bits physical, 57 bits virtual
  Byte Order:                      Little Endian
  CPU(s):                          480
  On-line CPU(s) list:             0-479
  Vendor ID:                       GenuineIntel
  Model name:                      Intel(R) Xeon(R) Platinum 8490H
  CPU family:                      6
  Model:                           143
  Thread(s) per core:              1
  Core(s) per socket:              60
  Socket(s):                       8
  Stepping:                        6
  Frequency boost:                 enabled
  CPU max MHz:                     1901.0000
  CPU min MHz:                     800.0000
  BogoMIPS:                        3800.00
  Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                   clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                   lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                   nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                   ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                   sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                   lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                   invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                                   vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                                   bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                                   avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                                   xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
```

(Continued on next page)

Platform Notes (Continued)

```
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                         arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                         vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                        tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
  Virtualization:                   VT-x
  L1d cache:                        22.5 MiB (480 instances)
  L1i cache:                        15 MiB (480 instances)
  L2 cache:                         960 MiB (480 instances)
  L3 cache:                         900 MiB (8 instances)
  NUMA node(s):                     32
  NUMA node0 CPU(s):                0-14
  NUMA node1 CPU(s):                15-29
  NUMA node2 CPU(s):                30-44
  NUMA node3 CPU(s):                45-59
  NUMA node4 CPU(s):                60-74
  NUMA node5 CPU(s):                75-89
  NUMA node6 CPU(s):                90-104
  NUMA node7 CPU(s):                105-119
  NUMA node8 CPU(s):                120-134
  NUMA node9 CPU(s):                135-149
  NUMA node10 CPU(s):               150-164
  NUMA node11 CPU(s):               165-179
  NUMA node12 CPU(s):               180-194
  NUMA node13 CPU(s):               195-209
  NUMA node14 CPU(s):               210-224
  NUMA node15 CPU(s):               225-239
  NUMA node16 CPU(s):               240-254
  NUMA node17 CPU(s):               255-269
  NUMA node18 CPU(s):               270-284
  NUMA node19 CPU(s):               285-299
  NUMA node20 CPU(s):               300-314
  NUMA node21 CPU(s):               315-329
  NUMA node22 CPU(s):               330-344
  NUMA node23 CPU(s):               345-359
  NUMA node24 CPU(s):               360-374
  NUMA node25 CPU(s):               375-389
  NUMA node26 CPU(s):               390-404
  NUMA node27 CPU(s):               405-419
  NUMA node28 CPU(s):               420-434
  NUMA node29 CPU(s):               435-449
  NUMA node30 CPU(s):               450-464
  NUMA node31 CPU(s):               465-479
  Vulnerability Itlb multihit:      Not affected
  Vulnerability L1tf:               Not affected
  Vulnerability Mds:                Not affected
  Vulnerability Meltdown:           Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
      L1d       48K    22.5M   12 Data            1     64        1             64
      L1i       32K      15M    8 Instruction     1     64        1             64
      L2         2M     960M   16 Unified         2   2048        1             64
      L3     112.5M     900M   15 Unified         3 122880        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 32 nodes (0-31)
  node 0 cpus: 0-14
  node 0 size: 128648 MB
  node 0 free: 127402 MB
  node 1 cpus: 15-29
  node 1 size: 129020 MB
  node 1 free: 128497 MB
  node 2 cpus: 30-44
  node 2 size: 129020 MB
  node 2 free: 128538 MB
  node 3 cpus: 45-59
  node 3 size: 129020 MB
  node 3 free: 128806 MB
  node 4 cpus: 60-74
  node 4 size: 129020 MB
  node 4 free: 128915 MB
  node 5 cpus: 75-89
  node 5 size: 129020 MB
  node 5 free: 128848 MB
  node 6 cpus: 90-104
  node 6 size: 129020 MB
  node 6 free: 128917 MB
  node 7 cpus: 105-119
  node 7 size: 129020 MB
  node 7 free: 128915 MB
  node 8 cpus: 120-134
  node 8 size: 129020 MB
  node 8 free: 128848 MB
  node 9 cpus: 135-149
  node 9 size: 129020 MB
  node 9 free: 128864 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node 10 cpus: 150-164
  node 10 size: 129020 MB
  node 10 free: 128850 MB
  node 11 cpus: 165-179
  node 11 size: 129020 MB
  node 11 free: 128843 MB
  node 12 cpus: 180-194
  node 12 size: 129020 MB
  node 12 free: 128867 MB
  node 13 cpus: 195-209
  node 13 size: 129020 MB
  node 13 free: 128888 MB
  node 14 cpus: 210-224
  node 14 size: 129020 MB
  node 14 free: 128883 MB
  node 15 cpus: 225-239
  node 15 size: 129020 MB
  node 15 free: 128886 MB
  node 16 cpus: 240-254
  node 16 size: 129020 MB
  node 16 free: 128878 MB
  node 17 cpus: 255-269
  node 17 size: 129020 MB
  node 17 free: 128876 MB
  node 18 cpus: 270-284
  node 18 size: 129020 MB
  node 18 free: 128871 MB
  node 19 cpus: 285-299
  node 19 size: 129020 MB
  node 19 free: 128903 MB
  node 20 cpus: 300-314
  node 20 size: 129020 MB
  node 20 free: 128922 MB
  node 21 cpus: 315-329
  node 21 size: 129020 MB
  node 21 free: 128915 MB
  node 22 cpus: 330-344
  node 22 size: 129020 MB
  node 22 free: 128924 MB
  node 23 cpus: 345-359
  node 23 size: 129020 MB
  node 23 free: 119440 MB
  node 24 cpus: 360-374
  node 24 size: 129020 MB
  node 24 free: 128904 MB
  node 25 cpus: 375-389
  node 25 size: 129020 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node 25 free: 128917 MB
  node 26 cpus: 390-404
  node 26 size: 128985 MB
  node 26 free: 128882 MB
  node 27 cpus: 405-419
  node 27 size: 129020 MB
  node 27 free: 128925 MB
  node 28 cpus: 420-434
  node 28 size: 129020 MB
  node 28 free: 128882 MB
  node 29 cpus: 435-449
  node 29 size: 129020 MB
  node 29 free: 128873 MB
  node 30 cpus: 450-464
  node 30 size: 129020 MB
  node 30 free: 128878 MB
  node 31 cpus: 465-479
  node 31 size: 128937 MB
  node 31 free: 128792 MB
  node distances:
 node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15  16  17  18  19  20  21  22  23  24
  25  26  27  28  29  30  31
   0:  10  12  12  12  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
    21  21  21  31  31  31  31
   1:  12  10  12  12  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
    21  21  21  31  31  31  31
   2:  12  12  10  12  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
    21  21  21  31  31  31  31
   3:  12  12  12  10  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
    21  21  21  31  31  31  31
   4:  21  21  21  21  10  12  12  12  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31
    31  31  31  21  21  21  21
   5:  21  21  21  21  12  10  12  12  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31
    31  31  31  21  21  21  21
   6:  21  21  21  21  12  12  10  12  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31
    31  31  31  21  21  21  21
   7:  21  21  21  21  12  12  12  10  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31
    31  31  31  21  21  21  21
   8:  21  21  21  21  31  31  31  31  10  12  12  12  21  21  21  21  21  21  21  21  31  31  31  31  31
    31  31  31  21  21  21  21
   9:  21  21  21  21  31  31  31  31  12  10  12  12  21  21  21  21  21  21  21  21  31  31  31  31  31
    31  31  31  21  21  21  21
  10:  21  21  21  21  31  31  31  31  12  12  10  12  21  21  21  21  21  21  21  21  31  31  31  31  31
    31  31  31  21  21  21  21
  11:  21  21  21  21  31  31  31  31  12  12  12  10  21  21  21  21  21  21  21  21  31  31  31  31  31
    31  31  31  21  21  21  21
  12:  31  31  31  31  21  21  21  21  21  21  21  21  10  12  12  12  31  31  31  31  21  21  21  21  21
```

(Continued on next page)

Platform Notes (Continued)

```
    21  21  21  31  31  31  31
   13:  31  31  31  31  21  21  21  21  21  21  21  21  12  10  12  12  31  31  31  31  21  21  21  21  21
    21  21  21  31  31  31  31
   14:  31  31  31  31  21  21  21  21  21  21  21  21  12  12  10  12  31  31  31  31  21  21  21  21  21
    21  21  21  31  31  31  31
   15:  31  31  31  31  21  21  21  21  21  21  21  21  12  12  12  10  31  31  31  31  21  21  21  21  21
    21  21  21  31  31  31  31
   16:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  10  12  12  12  21  21  21  21  21
    21  21  21  31  31  31  31
   17:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12  10  12  12  21  21  21  21  21
    21  21  21  31  31  31  31
   18:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12  12  10  12  21  21  21  21  21
    21  21  21  31  31  31  31
   19:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12  12  12  10  21  21  21  21  21
    21  21  21  31  31  31  31
   20:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  10  12  12  12  31
    31  31  31  21  21  21  21
   21:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  12  10  12  12  31
    31  31  31  21  21  21  21
   22:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  12  12  10  12  31
    31  31  31  21  21  21  21
   23:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  12  12  12  10  31
    31  31  31  21  21  21  21
   24:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  10
    12  12  12  21  21  21  21
   25:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12
    10  12  12  21  21  21  21
   26:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12
    12  10  12  21  21  21  21
   27:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12
    12  12  10  21  21  21  21
   28:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
    21  21  21  10  12  12  12
   29:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
    21  21  21  12  10  12  12
   30:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
    21  21  21  12  12  10  12
   31:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
    21  21  21  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       4227228684 kB

------------------------------------------------------------
10. who -r
  run-level 3 Mar 23 23:21
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd bluetooth cron display-manager getty@
                     haveged irqbalance iscsi issue-generator kbdsettings klog lvm2-monitor nscd
                   nvmefc-boot-connections postfix purge-kernels rollback rsyslog smartd sshd wicked
                     wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-fsck-root systemd-remount-fs
  disabled         accounts-daemon appstream-sync-cache autofs autoyast-initscripts blk-availability
                   bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups
                   cups-browsed debug-shell ebtables exchange-bmc-os-info firewalld gpm grub2-once
                 haveged-switch-root ipmi ipmievd iscsi-init iscsid iscsiuio issue-add-ssh-keys kexec-load
                 lunmask man-db-create multipathd nfs nfs-blkmap nmb nvmf-autoconnect ostree-remount rdisc
                 rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd
                     snmptrapd speech-dispatcherd svnserve systemd-boot-check-no-failures
                 systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
                     upower
  indirect         wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
  root=UUID=45b5dbe6-1d05-41ac-80df-f59bb33eace7
  splash=silent
  mitigations=auto
  quiet
  security=

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 1.90 GHz.
                    The governor "ondemand" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing              1
```

(Continued on next page)

Platform Notes (Continued)

```
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP4

------------------------------------------------------------
19. Disk information
SPEC is set to: /root/cpu2017-1.1.9
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme1n1p2 ext4  732G  497G  199G  72% /
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         Supermicro
    Product:        Super Server
    Product Family: Family

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     64x Micron Technology MTC40F2046S1RC48BA1 64 GB 2 rank 4800


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       American Megatrends International, LLC.
   BIOS Version:      1.0a
   BIOS Date:         03/16/2023
   BIOS Revision:     5.29
```

Compiler Version Notes

```
==============================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
                | 644.nab_s(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2023.0.0 Build 20221201
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                | 654.roms_s(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                | 628.pop2_s(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

Fortran benchmarks:
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using Fortran, C, and C++:
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Peak Compiler Invocation

C benchmarks:
icx

(Continued on next page)

Peak Compiler Invocation (Continued)

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP

(Continued on next page)

Peak Optimization Flags (Continued)

627.cam4_s (continued):
-Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-24 06:33:21-0400.
Report generated on 2023-04-12 12:42:52 by CPU2017 PS formatter v6442.
Originally published on 2023-04-11.