SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-241H-TNRTTP
(X13QEH+ , Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 1900

SPECrate®2017_fp_peak = 2010

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2023
Hardware Availability: Mar-2023
Software Availability: Jun-2022

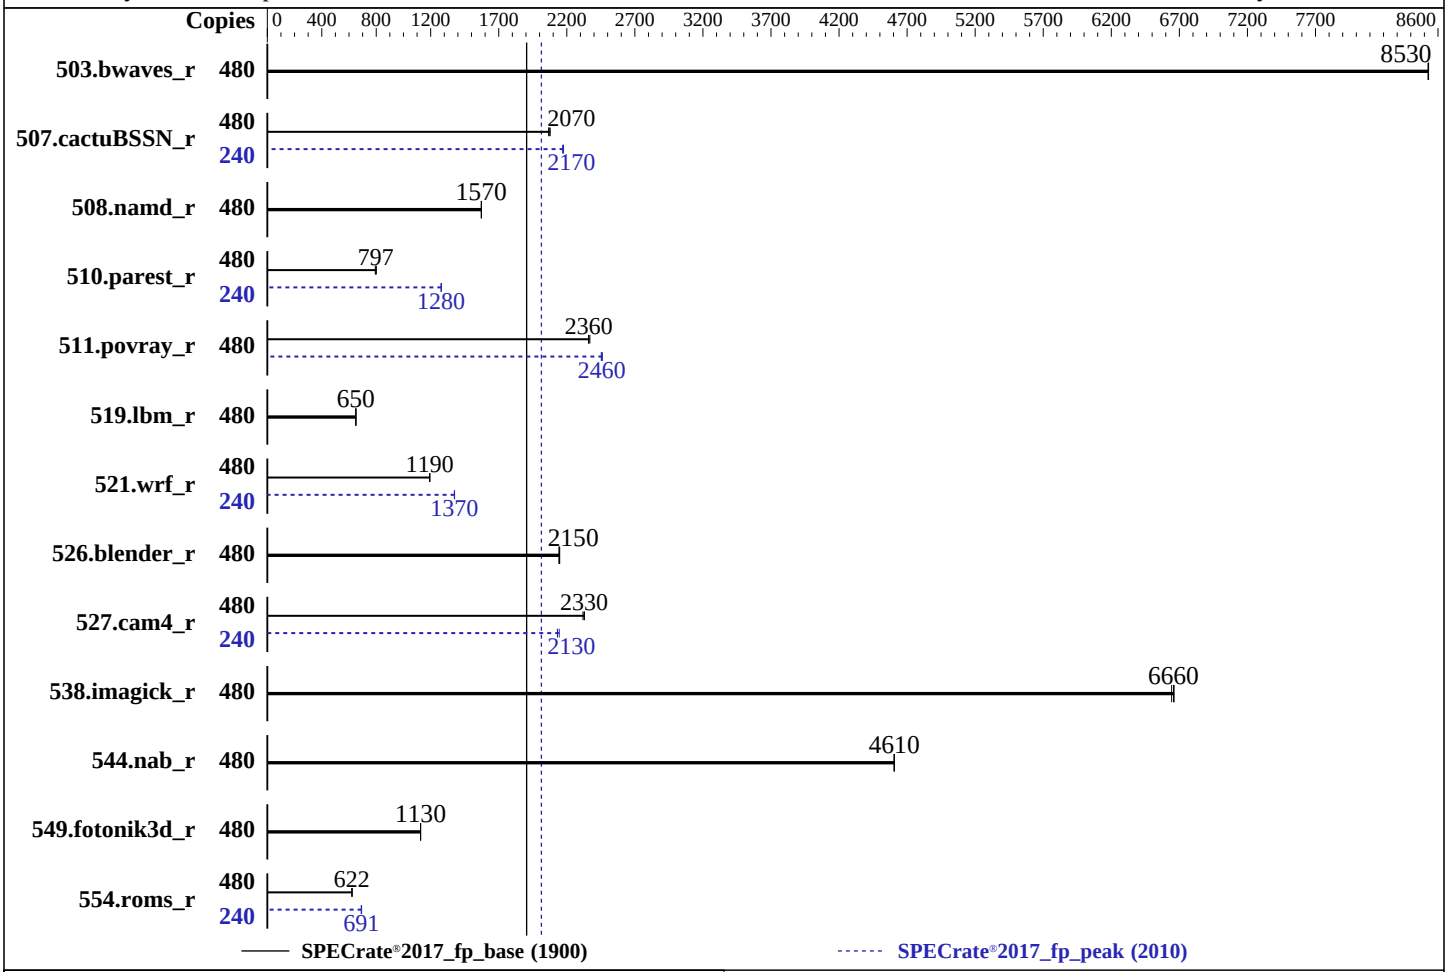

Hardware

CPU Name:	Intel Xeon Platinum 8490H
Max MHz:	3500
Nominal:	1900
Enabled:	240 cores, 4 chips, 2 threads/core
Orderable:	4 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	112.5 MB I+D on chip per chip
Other:	None
Memory:	1 TB (32 x 32 GB 2Rx8 PC5-4800B-R)
Storage:	1 x 1.90 TB NVMe SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default
Compiler:	C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 1.2 released Mar-2023
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-241H-TNRTTP
(X13QEH+ , Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 1900

SPECrate®2017_fp_peak = 2010

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2023
Hardware Availability: Mar-2023
Software Availability: Jun-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	480	564	8530	**564**	**8530**	564	8530	480	564	8530	**564**	**8530**	564	8530
507.cactuBSSN_r	480	294	2070	292	2080	**293**	**2070**	240	140	2170	**140**	**2170**	140	2180
508.namd_r	480	290	1570	**290**	**1570**	290	1570	480	290	1570	**290**	**1570**	290	1570
510.parest_r	480	**1575**	**797**	1583	793	1568	801	240	492	1280	**491**	**1280**	491	1280
511.povray_r	480	**475**	**2360**	473	2370	475	2360	480	**456**	**2460**	455	2460	457	2450
519.lbm_r	480	778	650	778	650	**778**	**650**	480	778	650	778	650	**778**	**650**
521.wrf_r	480	**901**	**1190**	902	1190	900	1190	240	391	1370	391	1380	**391**	**1370**
526.blender_r	480	**341**	**2150**	341	2140	340	2150	480	**341**	**2150**	341	2140	340	2150
527.cam4_r	480	362	2320	360	2330	**361**	**2330**	240	**197**	**2130**	197	2130	196	2140
538.imagick_r	480	179	6660	**179**	**6660**	180	6640	480	179	6660	**179**	**6660**	180	6640
544.nab_r	480	175	4600	**175**	**4610**	175	4610	480	175	4600	**175**	**4610**	175	4610
549.fotonik3d_r	480	1661	1130	1662	1130	**1661**	**1130**	480	1661	1130	1662	1130	**1661**	**1130**
554.roms_r	480	1225	623	1228	621	**1226**	**622**	240	551	693	**552**	**691**	553	690

SPECrate®2017_fp_base = 1900

SPECrate®2017_fp_peak = 2010

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
```

(Continued on next page)

General Notes (Continued)

```
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

 NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
 is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Settings:
 Hyper-Threading [ALL] = Enable
 Power Technology = Custom
 Power Performance Tuning = BIOS Controls EPB
 ENERGY_PERF_BIAS_CFG mode = Extreme Performance
 DCU Streamer Prefetcher = Disable
 KTI Prefetch = Enable
 SNC = Enable SNC4 (4-clusters)
 LLC Dead Line Alloc = Disable

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on 156-144 Tue Mar 21 22:15:48 2023

 SUT (System Under Test) info as seen by some common utilities.

 ----------------------------------------------------------
 Table of contents
 ----------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
```

(Continued on next page)

Platform Notes (Continued)

```
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux 156-144 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   22:15:48 up  7:05,  1 user,  load average: 328.96, 442.11, 461.78
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                15:11    6:56m  1.50s  0.06s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 4124690
  max locked memory       (kbytes, -l) 64
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 4124690
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 30
 login -- root
 -bash
 -bash
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=480 -c
   ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=240 --define physicalfirst
    --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=480 --configfile
   ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=240 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
    --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
    $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Platinum 8490H
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
    stepping        : 8
    microcode       : 0x2b0001b0
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 60
    siblings        : 120
    4 physical ids (chips)
    480 processors (hardware threads)
    physical id 0: core ids 0-59
    physical id 1: core ids 0-59
    physical id 2: core ids 0-59
    physical id 3: core ids 0-59
    physical id 0: apicids 0-119
    physical id 1: apicids 128-247
    physical id 2: apicids 256-375
    physical id 3: apicids 384-503
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.2:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
```

(Continued on next page)

Platform Notes (Continued)

```
  Address sizes:                  46 bits physical, 57 bits virtual
  Byte Order:                     Little Endian
  CPU(s):                         480
  On-line CPU(s) list:            0-479
  Vendor ID:                      GenuineIntel
  Model name:                     Intel(R) Xeon(R) Platinum 8490H
  CPU family:                     6
  Model:                          143
  Thread(s) per core:             2
  Core(s) per socket:             60
  Socket(s):                      4
  Stepping:                       8
  Frequency boost:                enabled
  CPU max MHz:                    1901.0000
  CPU min MHz:                    800.0000
  BogoMIPS:                       3800.00
  Flags:                          fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                  clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                  lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                  nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                  ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                  sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                  lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                  invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                                  vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                                  bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                                  avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                                  xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                  cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                  arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                                  vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                                  bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                                  tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
  Virtualization:                 VT-x
  L1d cache:                      11.3 MiB (240 instances)
  L1i cache:                      7.5 MiB (240 instances)
  L2 cache:                       480 MiB (240 instances)
  L3 cache:                       450 MiB (4 instances)
  NUMA node(s):                   16
  NUMA node0 CPU(s):              0-14,240-254
  NUMA node1 CPU(s):              15-29,255-269
  NUMA node2 CPU(s):              30-44,270-284
  NUMA node3 CPU(s):              45-59,285-299
  NUMA node4 CPU(s):              60-74,300-314
  NUMA node5 CPU(s):              75-89,315-329
  NUMA node6 CPU(s):              90-104,330-344
  NUMA node7 CPU(s):              105-119,345-359
```

(Continued on next page)

Platform Notes (Continued)

```
   NUMA node8 CPU(s):                120-134,360-374
   NUMA node9 CPU(s):                135-149,375-389
   NUMA node10 CPU(s):               150-164,390-404
   NUMA node11 CPU(s):               165-179,405-419
   NUMA node12 CPU(s):               180-194,420-434
   NUMA node13 CPU(s):               195-209,435-449
   NUMA node14 CPU(s):               210-224,450-464
   NUMA node15 CPU(s):               225-239,465-479
   Vulnerability Itlb multihit:      Not affected
   Vulnerability L1tf:               Not affected
   Vulnerability Mds:                Not affected
   Vulnerability Meltdown:           Not affected
   Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
   Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
   Vulnerability Spectre v2:         Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
   Vulnerability Srbds:              Not affected
   Vulnerability Tsx async abort:    Not affected

  From lscpu --cache:
       NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
       L1d       48K    11.3M   12 Data            1     64        1             64
       L1i       32K     7.5M    8 Instruction     1     64        1             64
       L2         2M     480M   16 Unified         2   2048        1             64
       L3     112.5M     450M   15 Unified         3 122880        1             64

  ------------------------------------------------------------
  8. numactl --hardware
  NOTE: a numactl 'node' might or might not correspond to a physical chip.
    available: 16 nodes (0-15)
    node 0 cpus: 0-14,240-254
    node 0 size: 64069 MB
    node 0 free: 45143 MB
    node 1 cpus: 15-29,255-269
    node 1 size: 64504 MB
    node 1 free: 51314 MB
    node 2 cpus: 30-44,270-284
    node 2 size: 64504 MB
    node 2 free: 52313 MB
    node 3 cpus: 45-59,285-299
    node 3 size: 64504 MB
    node 3 free: 52542 MB
    node 4 cpus: 60-74,300-314
    node 4 size: 64504 MB
    node 4 free: 52459 MB
    node 5 cpus: 75-89,315-329
    node 5 size: 64504 MB
    node 5 free: 52557 MB
```

(Continued on next page)

Platform Notes (Continued)

```
node 6 cpus: 90-104,330-344
node 6 size: 64504 MB
node 6 free: 52546 MB
node 7 cpus: 105-119,345-359
node 7 size: 64504 MB
node 7 free: 52540 MB
node 8 cpus: 120-134,360-374
node 8 size: 64504 MB
node 8 free: 52544 MB
node 9 cpus: 135-149,375-389
node 9 size: 64504 MB
node 9 free: 52549 MB
node 10 cpus: 150-164,390-404
node 10 size: 64504 MB
node 10 free: 52553 MB
node 11 cpus: 165-179,405-419
node 11 size: 64504 MB
node 11 free: 52536 MB
node 12 cpus: 180-194,420-434
node 12 size: 64504 MB
node 12 free: 52546 MB
node 13 cpus: 195-209,435-449
node 13 size: 64504 MB
node 13 free: 52565 MB
node 14 cpus: 210-224,450-464
node 14 size: 64504 MB
node 14 free: 52536 MB
node 15 cpus: 225-239,465-479
node 15 size: 64065 MB
node 15 free: 52125 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
  0:  10  12  12  12  21  21  21  21  21  21  21  21  21  21  21  21
  1:  12  10  12  12  21  21  21  21  21  21  21  21  21  21  21  21
  2:  12  12  10  12  21  21  21  21  21  21  21  21  21  21  21  21
  3:  12  12  12  10  21  21  21  21  21  21  21  21  21  21  21  21
  4:  21  21  21  21  10  12  12  12  21  21  21  21  21  21  21  21
  5:  21  21  21  21  12  10  12  12  21  21  21  21  21  21  21  21
  6:  21  21  21  21  12  12  10  12  21  21  21  21  21  21  21  21
  7:  21  21  21  21  12  12  12  10  21  21  21  21  21  21  21  21
  8:  21  21  21  21  21  21  21  21  10  12  12  12  21  21  21  21
  9:  21  21  21  21  21  21  21  21  12  10  12  12  21  21  21  21
 10:  21  21  21  21  21  21  21  21  12  12  10  12  21  21  21  21
 11:  21  21  21  21  21  21  21  21  12  12  12  10  21  21  21  21
 12:  21  21  21  21  21  21  21  21  21  21  21  21  10  12  12  12
 13:  21  21  21  21  21  21  21  21  21  21  21  21  12  10  12  12
 14:  21  21  21  21  21  21  21  21  21  21  21  21  12  12  10  12
```

(Continued on next page)

Platform Notes (Continued)

```
    15:  21  21  21  21  21  21  21  21  21  21  21  21  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1055945504 kB

------------------------------------------------------------
10. who -r
  run-level 3 Mar 21 15:11

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd bluetooth cron display-manager
                   firewalld getty@ haveged irqbalance iscsi issue-generator kbdsettings kdump kdump-early
                   klog lvm2-monitor nscd nvmefc-boot-connections postfix purge-kernels rollback rsyslog
                   smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         accounts-daemon appstream-sync-cache autofs autoyast-initscripts blk-availability
                   bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups
                   cups-browsed debug-shell ebtables exchange-bmc-os-info gpm grub2-once haveged-switch-root
                   ipmi ipmievd iscsi-init iscsid iscsiuio issue-add-ssh-keys kexec-load lunmask
                   man-db-create multipathd nfs nfs-blkmap nmb nvmf-autoconnect ostree-remount rdisc rpcbind
                   rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd
                   speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                   systemd-time-wait-sync systemd-timesyncd udisks2 upower
  indirect         wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
  root=UUID=2b95edbf-a8ba-4a27-b211-c1f03f86601f
  splash=silent
  mitigations=auto
  quiet
  security=apparmor
  crashkernel=321M,high
  crashkernel=72M,low

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
```

(Continued on next page)

Platform Notes (Continued)

```
     current policy: frequency should be within 800 MHz and 1.90 GHz.
                     The governor "ondemand" may decide which speed to use
                     within this range.
     boost state support:
       Supported: yes
       Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
 18. OS release
   From /etc/*-release /etc/*-version
   os-release SUSE Linux Enterprise Server 15 SP4

 ------------------------------------------------------------
 19. Disk information
 SPEC is set to: /home/cpu2017
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/nvme0n1p3 xfs   1.1T  180G  947G  16% /home

 ------------------------------------------------------------
 20. /sys/devices/virtual/dmi/id
     Vendor:         Supermicro
     Product:        Super Server
     Product Family: Family

 ------------------------------------------------------------
 21. dmidecode
   Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
      32x Samsung M321R4GA3BB6-CQKMG 32 GB 2 rank 4800


 ------------------------------------------------------------
 22. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       American Megatrends International, LLC.
    BIOS Version:      1.2
    BIOS Date:         03/17/2023
    BIOS Revision:     5.29
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:
```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:
```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:
```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:
```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:
```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:
```
icx
```

C++ benchmarks:
```
icpx
```

(Continued on next page)

Peak Compiler Invocation (Continued)

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

(Continued on next page)

Peak Optimization Flags (Continued)

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-22 01:15:48-0400.
Report generated on 2023-04-21 13:46:38 by CPU2017 PS formatter v6442.
Originally published on 2023-04-21.