SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8490H, 1.90GHz

SPECspeed®2017_fp_base = 355

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Mar-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

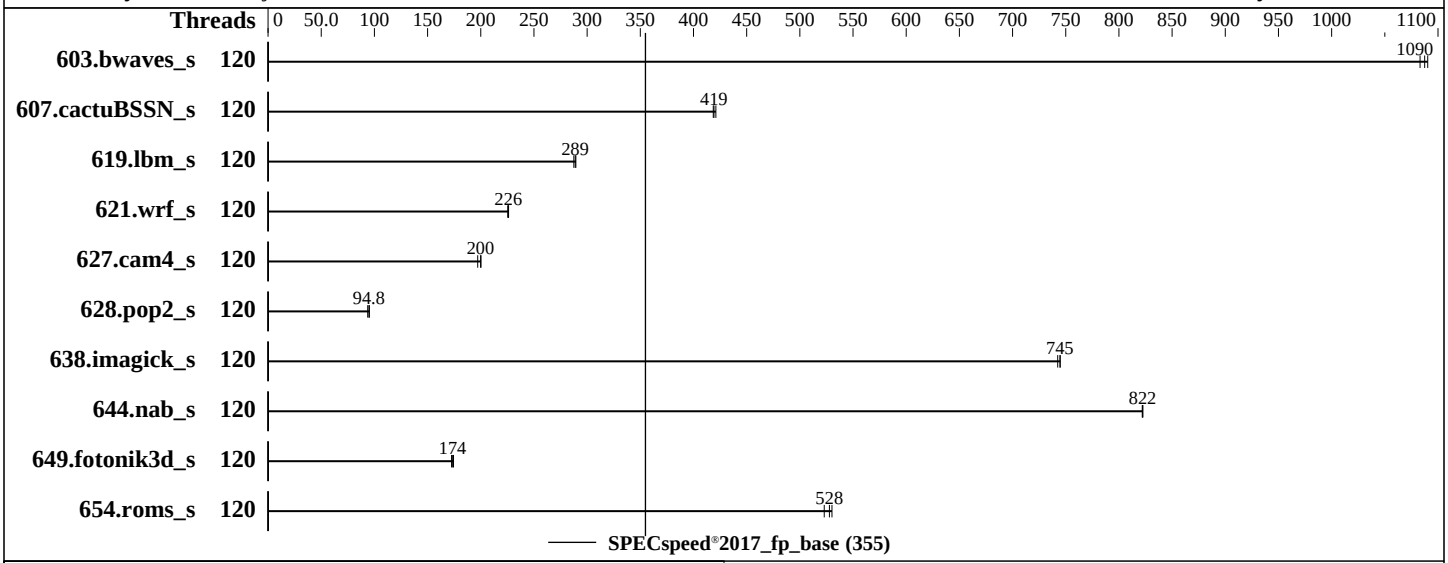

Hardware

CPU Name:	Intel Xeon Platinum 8490H
Max MHz:	3500
Nominal:	1900
Enabled:	120 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	112.5 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x SATA SSD, 1.92TB
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default
Compiler:	C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel:	Yes
Firmware:	Fujitsu BIOS Version V1.0.0.0 R1.10.0 for D3983-A1x. Released Mar-2023 tested as V1.0.0.0 R0.24.1 for D3983-A1x Jan-2023
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	120	54.1	1090	**54.3**	**1090**	54.5	1080							
607.cactuBSSN_s	120	39.8	419	39.6	421	**39.8**	**419**							
619.lbm_s	120	**18.1**	**289**	18.1	289	18.2	288							
621.wrf_s	120	**58.5**	**226**	58.7	225	58.5	226							
627.cam4_s	120	45.0	197	44.3	200	**44.4**	**200**							
628.pop2_s	120	**125**	**94.8**	125	95.3	127	93.7							
638.imagick_s	120	19.4	745	**19.4**	**745**	19.4	742							
644.nab_s	120	21.2	822	**21.2**	**822**	21.3	822							
649.fotonik3d_s	120	52.3	174	52.8	173	**52.5**	**174**							
654.roms_s	120	29.7	530	**29.8**	**528**	30.1	523							

SPECspeed®2017_fp_base = 355

SPECspeed®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH =
     "/home/benchmark/speccpu-1.1.9/lib/intel64:/home/benchmark/speccpu-1.1.9
     /je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

(Continued on next page)

General Notes (Continued)

```
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS configuration:
Hyper Threading = Disabled
DCU IP Prefetcher = Disabled
Package C State limit = C0
LLC Prefetch = Enabled
DBP-F = Enabled
CPU Performance Boost = Aggressive
FAN Control = Full

Sysinfo program /home/benchmark/speccpu-1.1.9/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Fri Mar 17 00:45:47 2023

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
```

(Continued on next page)

Platform Notes (Continued)

```
 23. BIOS
------------------------------------------------------------

------------------------------------------------------------
 1. uname -a
   Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222/lp)
   x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
 2. w
    00:45:47 up 1 min,  2 users,  load average: 0.58, 0.38, 0.15
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
   root     tty1     -                00:44   59.00s  0.09s  0.09s -bash
   root     pts/0    192.168.1.112    00:45   11.00s  2.16s  0.16s -bash

------------------------------------------------------------
 3. Username
   From environment variable $USER:  root

------------------------------------------------------------
 4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
   scheduling priority             (-e) 0
   file size               (blocks, -f) unlimited
   pending signals                 (-i) 4125329
   max locked memory       (kbytes, -l) 64
   max memory size         (kbytes, -m) unlimited
   open files                      (-n) 1024
   pipe size            (512 bytes, -p) 8
   POSIX message queues     (bytes, -q) 819200
   real-time priority              (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time               (seconds, -t) unlimited
   max user processes              (-u) 4125329
   virtual memory          (kbytes, -v) unlimited
   file locks                      (-x) unlimited

------------------------------------------------------------
 5. sysinfo process ancestry
  /usr/lib/systemd/systemd --switched-root --system --deserialize 30
  sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
  sshd: root@pts/0
  -bash
  -bash
  runcpu --nobuild --action validate --define default-platform-flags -c
    ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=120 --tune base -o all --define drop_caches
```

(Continued on next page)

Platform Notes (Continued)

```
    --define smt-on fpspeed
  runcpu --nobuild --action validate --define default-platform-flags --configfile
    ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=120 --tune base --output_format all --define
    drop_caches --define smt-on --nopower --runmode speed --tune base --size refspeed fpspeed --nopreenv
    --note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.fpspeed.001.0.log --lognum 001.0
    --from_runcpu 2
  specperl $SPEC/bin/sysinfo
$SPEC = /home/benchmark/speccpu-1.1.9

------------------------------------------------------------
6. /proc/cpuinfo
     model name      : Intel(R) Xeon(R) Platinum 8490H
     vendor_id       : GenuineIntel
     cpu family      : 6
     model           : 143
     stepping        : 8
     microcode       : 0x2b000130
     bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
     cpu cores       : 60
     siblings        : 60
     2 physical ids (chips)
     120 processors (hardware threads)
     physical id 0: core ids 0-59
     physical id 1: core ids 0-59
     physical id 0: apicids
    0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
     ,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118
     physical id 1: apicids
    128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
    80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,23
     2,234,236,238,240,242,244,246
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.2:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   46 bits physical, 57 bits virtual
  Byte Order:                      Little Endian
  CPU(s):                          120
  On-line CPU(s) list:             0-119
  Vendor ID:                       GenuineIntel
  Model name:                      Intel(R) Xeon(R) Platinum 8490H
  CPU family:                      6
```

(Continued on next page)

Platform Notes (Continued)

```
   Model:                           143
   Thread(s) per core:              1
   Core(s) per socket:              60
   Socket(s):                       2
   Stepping:                        8
   CPU max MHz:                     3500.0000
   CPU min MHz:                     800.0000
   BogoMIPS:                        3800.00
  Flags:                            fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                   clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                     lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                   nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                    ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                   sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                      lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                   invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                                   tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                                   avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                                    avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                                     xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                   cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                    arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
                                   ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                   tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                                     enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                                           amx_tile flush_l1d arch_capabilities
   Virtualization:                  VT-x
   L1d cache:                       5.6 MiB (120 instances)
   L1i cache:                       3.8 MiB (120 instances)
   L2 cache:                        240 MiB (120 instances)
   L3 cache:                        225 MiB (2 instances)
   NUMA node(s):                    2
   NUMA node0 CPU(s):               0-59
   NUMA node1 CPU(s):               60-119
   Vulnerability Itlb multihit:     Not affected
   Vulnerability L1tf:              Not affected
   Vulnerability Mds:               Not affected
   Vulnerability Meltdown:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
   Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
   Vulnerability Srbds:             Not affected
   Vulnerability Tsx async abort:   Not affected

 From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
      L1d       48K     5.6M   12 Data            1     64        1             64
```

(Continued on next page)

Platform Notes (Continued)

```
      L1i       32K     3.8M    8 Instruction     1     64        1             64
      L2         2M     240M   16 Unified         2   2048        1             64
      L3     112.5M     225M   15 Unified         3 122880        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 2 nodes (0-1)
  node 0 cpus: 0-59
  node 0 size: 515661 MB
  node 0 free: 513996 MB
  node 1 cpus: 60-119
  node 1 size: 515695 MB
  node 1 free: 514862 MB
  node distances:
  node   0   1
    0:  10  21
    1:  21  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1056109276 kB

------------------------------------------------------------
10. who -r
  run-level 3 Mar 17 00:44

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
  Default Target  Status
  multi-user      degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT         LOAD   ACTIVE SUB    DESCRIPTION
  * sep5.service loaded failed failed systemd script to load sep5 driver at boot time

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled         YaST2-Firstboot YaST2-Second-Stage apparmor auditd bluetooth cron display-manager getty@
                  haveged irqbalance iscsi issue-generator kbdsettings kdump kdump-early klog lvm2-monitor
                   nscd postfix purge-kernels rollback rsyslog sep5 smartd sshd wicked wickedd-auto4
                      wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled        accounts-daemon appstream-sync-cache autofs autoyast-initscripts blk-availability
                  bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups
```

(Continued on next page)

Platform Notes (Continued)

```
                cups-browsed debug-shell ebtables exchange-bmc-os-info firewalld gpm grub2-once
              haveged-switch-root ipmi ipmievd iscsi-init iscsid iscsiuio issue-add-ssh-keys kexec-load
                lunmask man-db-create multipathd nfs nfs-blkmap nmb ostree-remount rdisc rpcbind
              rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd
              speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                  systemd-time-wait-sync systemd-timesyncd udisks2 upower
  indirect        wickedd

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
  root=UUID=0e5beafe-73ba-4cb4-b738-5343b4292867
  splash=silent
  mitigations=auto
  quiet
  security=apparmor
  crashkernel=322M,high
  crashkernel=72M,low

------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 3.50 GHz.
                    The governor "powersave" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    20
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                     60
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP4

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/benchmark/speccpu-1.1.9
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/sda2      xfs   1.8T  116G  1.7T   7% /

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         FUJITSU
    Product:        PRIMERGY RX2540 M7
    Product Family: SERVER
    Serial:         EWCExxxxxx

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    2x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800
```

(Continued on next page)

Platform Notes (Continued)

```
     8x Samsung M321R8GA0BB0-CQKEG 64 GB 2 rank 4800
     6x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       FUJITSU
    BIOS Version:      V1.0.0.0 R0.24.1 for D3983-A1x
    BIOS Date:         01/06/2023
    BIOS Revision:     0.24
    Firmware Revision: 2.0
```

Compiler Version Notes

```
==============================================================================
C               | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 607.cactuBSSN_s(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Fortran, C      | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:
```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:
```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:
```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevA.html
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevA.xml
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-16 11:45:46-0400.
Report generated on 2023-04-12 12:49:21 by CPU2017 PS formatter v6442.
Originally published on 2023-04-11.