



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Nettrix

R620 G50 (Intel Xeon Gold 6426Y, 2.50 GHz)

**SPECSpeed®2017\_int\_base = 15.5**

**SPECSpeed®2017\_int\_peak = 15.8**

CPU2017 License: 6138


Test Date: Mar-2023

Test Sponsor: Nettrix

Hardware Availability: Jan-2023

Tested by: Nettrix

Software Availability: Dec-2022

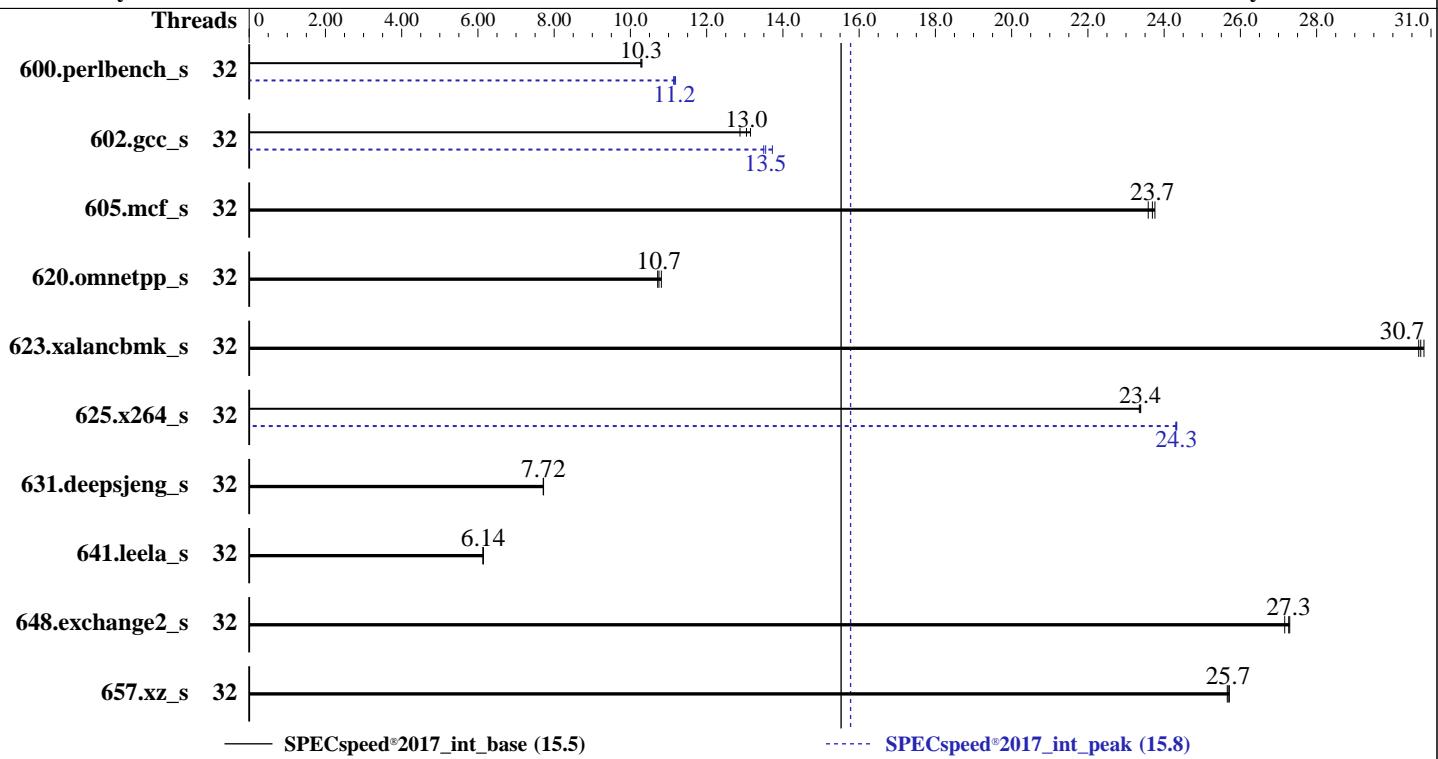

### Hardware

CPU Name: Intel Xeon Gold 6426Y  
 Max MHz: 4100  
 Nominal: 2500  
 Enabled: 32 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 37.5 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 960 GB NVME SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler Classic for Linux;  
 C/C++: Version 2023.0 of Intel C/C++ Compiler Classic for Linux  
 Parallel: Yes  
 Firmware: Nettrix BIOS Version NNH1041018-U00-1 released Nov-2022  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Nettrix**

**SPECspeed®2017\_int\_base = 15.5**

**SPECspeed®2017\_int\_peak = 15.8**

CPU2017 License: 6138

Test Date: Mar-2023

Test Sponsor: Nettrix

Hardware Availability: Jan-2023

Tested by: Nettrix

Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	32	172	10.3	173	10.3	<u>173</u>	<u>10.3</u>	32	<u>159</u>	<u>11.2</u>	159	11.2	<u>159</u>	11.1
602.gcc_s	32	<b>305</b>	<b>13.0</b>	309	12.9	303	13.1	32	295	13.5	<b>294</b>	<b>13.5</b>	290	13.7
605.mcf_s	32	200	23.6	<b>199</b>	<b>23.7</b>	199	23.8	32	200	23.6	<b>199</b>	<b>23.7</b>	199	23.8
620.omnetpp_s	32	151	10.8	<b>152</b>	<b>10.7</b>	152	10.7	32	151	10.8	<b>152</b>	<b>10.7</b>	152	10.7
623.xalancbmk_s	32	46.2	30.7	<b>46.1</b>	<b>30.7</b>	46.0	30.8	32	46.2	30.7	<b>46.1</b>	<b>30.7</b>	46.0	30.8
625.x264_s	32	75.4	23.4	<b>75.5</b>	<b>23.4</b>	75.5	23.3	32	72.6	24.3	72.5	24.3	<b>72.5</b>	<b>24.3</b>
631.deepsjeng_s	32	186	7.72	<b>186</b>	<b>7.72</b>	186	7.71	32	186	7.72	<b>186</b>	<b>7.72</b>	186	7.71
641.leela_s	32	278	6.14	<b>278</b>	<b>6.14</b>	278	6.13	32	278	6.14	<b>278</b>	<b>6.14</b>	278	6.13
648.exchange2_s	32	108	27.2	108	27.3	<b>108</b>	<b>27.3</b>	32	108	27.2	108	27.3	<b>108</b>	<b>27.3</b>
657.xz_s	32	241	25.7	<b>241</b>	<b>25.7</b>	240	25.7	32	241	25.7	<b>241</b>	<b>25.7</b>	240	25.7
SPECspeed®2017_int_base = <b>15.5</b>														
SPECspeed®2017_int_peak = <b>15.8</b>														

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/home/lijq/lib/intel64:/home/lijq/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0  
NA : The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

R620 G50 (Intel Xeon Gold 6426Y, 2.50 GHz)

SPECspeed®2017\_int\_base = 15.5

SPECspeed®2017\_int\_peak = 15.8

CPU2017 License: 6138

Test Date: Mar-2023

Test Sponsor: Nettrix

Hardware Availability: Jan-2023

Tested by: Nettrix

Software Availability: Dec-2022

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
```

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

## Platform Notes

BIOS Configuration:

```
Enable LP [Global] set to Single LP
LLC Prefetch set to Enabled
SNC (Sub NUMA) set to Disabled
Patrol Scrub set to Disabled
LLC dead line alloc set to Disabled
XPT Prefetch set to Enabled
KTI Prefetch set to Auto
SR-IOV Support set to Disabled
Energy Efficient Turbo set to Disabled
```

```
Sysinfo program /home/lijq/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Fri Apr 29 20:39:18 2022
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
  12. Services, from systemctl list-unit-files
  13. Linux kernel boot-time arguments, from /proc/cmdline
  14. cpupower frequency-info
  15. tuned-adm active
  16. sysctl
  17. /sys/kernel/mm/transparent\_hugepage
  18. /sys/kernel/mm/transparent\_hugepage/khugepaged
  19. OS release
  20. Disk information
  21. /sys/devices/virtual/dmi/id
  22. dmidecode
  23. BIOS
- 

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

R620 G50 (Intel Xeon Gold 6426Y, 2.50 GHz)

SPECspeed®2017\_int\_base = 15.5

SPECspeed®2017\_int\_peak = 15.8

CPU2017 License: 6138

Test Date: Mar-2023

Test Sponsor: Nettrix

Hardware Availability: Jan-2023

Tested by: Nettrix

Software Availability: Dec-2022

## Platform Notes (Continued)

```
-----  
1. uname -a  
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)  
x86_64 x86_64 x86_64 GNU/Linux  
  
-----  
2. w  
20:39:18 up 39 min, 1 user, load average: 0.10, 2.52, 2.30  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root pts/0 10.2.48.216 20:03 38.00s 0.86s 0.00s -bash  
  
-----  
3. Username  
From environment variable $USER: root  
  
-----  
4. ulimit -a  
core file size          (blocks, -c) unlimited  
data seg size           (kbytes, -d) unlimited  
scheduling priority     (-e) 0  
file size               (blocks, -f) unlimited  
pending signals          (-i) 4125309  
max locked memory       (kbytes, -l) 64  
max memory size         (kbytes, -m) unlimited  
open files              (-n) 1024  
pipe size               (512 bytes, -p) 8  
POSIX message queues    (bytes, -q) 819200  
real-time priority      (-r) 0  
stack size              (kbytes, -s) unlimited  
cpu time                (seconds, -t) unlimited  
max user processes       (-u) 4125309  
virtual memory           (kbytes, -v) unlimited  
file locks              (-x) unlimited  
  
-----  
5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 29  
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups  
sshd: root@pts/0  
-bash  
-bash  
runcpu --nobuild --reportable --iterations 3 --define default-platform-flags -c  
  ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=32 --tune base,peak -o all --define  
  intspeedaffinity --define drop_caches intspeed  
runcpu --nobuild --reportable --iterations 3 --define default-platform-flags --configfile  
  ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=32 --tune base,peak --output_format all  
  --define intspeedaffinity --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed  
  intspeed --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.113/templogs/preenv.intspeed.113.0.log  
  --lognum 113.0 --from_runcpu 2  
specperl $SPEC/bin/sysinfo  
$SPEC = /home/lijq  
  
-----  
6. /proc/cpuinfo  
model name      : Intel(R) Xeon(R) Gold 6426Y  
vendor_id       : GenuineIntel  
cpu family     : 6  
model          : 143  
stepping        : 8  
microcode       : 0x2b000111
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Nettrix

R620 G50 (Intel Xeon Gold 6426Y, 2.50 GHz)

SPECspeed®2017\_int\_base = 15.5

SPECspeed®2017\_int\_peak = 15.8

CPU2017 License: 6138

Test Date: Mar-2023

Test Sponsor: Nettrix

Hardware Availability: Jan-2023

Tested by: Nettrix

Software Availability: Dec-2022

## Platform Notes (Continued)

```
bugs          : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores    : 16
siblings     : 16
2 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-15
physical id 1: core ids 0-15
physical id 0: apicids 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30
physical id 1: apicids 128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

-----  
7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 32
On-line CPU(s) list:   0-31
Vendor ID:              GenuineIntel
Model name:             Intel(R) Xeon(R) Gold 6426Y
CPU family:             6
Model:                  143
Thread(s) per core:    1
Core(s) per socket:    16
Socket(s):              2
Stepping:               8
Frequency boost:       enabled
CPU max MHz:           2501.0000
CPU min MHz:           800.0000
BogoMIPS:               5000.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmon tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtrp pdcm pcid dca sse4_1
                        sse4_2 x2apic movebe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                       lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
                        invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced
                        tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                        avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                        vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid
                        bus_lock_detect cldemote movdir64b enqcmd fsrm md_clear serialize
                        tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
Virtualization:          VT-x
L1d cache:               1.5 MiB (32 instances)
L1i cache:               1 MiB (32 instances)
L2 cache:               64 MiB (32 instances)
L3 cache:               75 MiB (2 instances)
NUMA node(s):            2
NUMA node0 CPU(s):       0-15
NUMA node1 CPU(s):       16-31
Vulnerability Itlb multihit: Not affected
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

R620 G50 (Intel Xeon Gold 6426Y, 2.50 GHz)

SPECspeed®2017\_int\_base = 15.5

SPECspeed®2017\_int\_peak = 15.8

CPU2017 License: 6138

Test Date: Mar-2023

Test Sponsor: Nettrix

Hardware Availability: Jan-2023

Tested by: Nettrix

Software Availability: Dec-2022

## Platform Notes (Continued)

Vulnerability Llftf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	2M	64M	16	Unified	2	2048	1	64
L3	37.5M	75M	15	Unified	3	40960	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available:	2 nodes (0-1)
node 0 cpus:	0-15
node 0 size:	515611 MB
node 0 free:	514743 MB
node 1 cpus:	16-31
node 1 size:	515737 MB
node 1 free:	511738 MB
node distances:	
node 0 1	
0:	10 21
1:	21 10

-----  
9. /proc/meminfo

MemTotal:	1056101592 kB
-----------	---------------

-----  
10. who -r  
run-level 3 Apr 29 20:00

-----  
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

Default Target	Status
multi-user	running

-----  
12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	apparmor auditd cron getty@ haveged irqbalance issue-generator kbdsettings kdump kdump-early nvmefc-boot-connections postfix purge-kernels rollback sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell exchange-bmc-os-info grub2-once haveged-switch-root ipmievd issue-add-ssh-keys kexec-load nfs nfs-blkmap nvvmf-autoconnect rpcbind rpmconfigcheck serial-getty@ systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned
indirect	wickedd

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

R620 G50 (Intel Xeon Gold 6426Y, 2.50 GHz)

CPU2017 License: 6138

Test Sponsor: Nettrix

Tested by: Nettrix

SPECspeed®2017\_int\_base = 15.5

SPECspeed®2017\_int\_peak = 15.8

Test Date: Mar-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=9e7d079b-be10-4779-89e1-79f870e2ca09
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=300M,high
crashkernel=72M,low
```

```
-----  
14. cpupower frequency-info  
analyzing CPU 0:  
    current policy: frequency should be within 800 MHz and 2.50 GHz.  
                The governor "ondemand" may decide which speed to use  
                within this range.  
    boost state support:  
        Supported: yes  
        Active: yes
```

```
-----  
15. tuned-adm active  
It seems that tuned daemon is not running, preset profile is not activated.  
Preset profile: throughput-performance
```

```
-----  
16. sysctl  
kernel.numa_balancing          1  
kernel.randomize_va_space       2  
vm.compression_proactiveness   20  
vm.dirty_background_bytes      0  
vm.dirty_background_ratio      10  
vm.dirty_bytes                 0  
vm.dirty_expire_centisecs     3000  
vm.dirty_ratio                 20  
vm.dirty_writeback_centisecs   500  
vm.dirtytime_expire_seconds    43200  
vm.extfrag_threshold           500  
vm.min_unmapped_ratio          1  
vm.nr_hugepages                0  
vm.nr_hugepages_mempolicy       0  
vm.nr_overcommit_hugepages     0  
vm.swappiness                  60  
vm.watermark_boost_factor      15000  
vm.watermark_scale_factor       10  
vm.zone_reclaim_mode           0
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage  
defrag           always defer defer+madvise [madvise] never  
enabled          [always] madvise never  
hugepage_pmd_size 2097152  
shmem_enabled    always within_size advise [never] deny force
```

```
-----  
18. /sys/kernel/mm/transparent_hugepage/khugepaged  
alloc_sleep_millisecs 60000  
defrag             1  
max_ptes_none      511  
max_ptes_shared    256  
max_ptes_swap      64
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

R620 G50 (Intel Xeon Gold 6426Y, 2.50 GHz)

SPECspeed®2017\_int\_base = 15.5

SPECspeed®2017\_int\_peak = 15.8

CPU2017 License: 6138

Test Date: Mar-2023

Test Sponsor: Nettrix

Hardware Availability: Jan-2023

Tested by: Nettrix

Software Availability: Dec-2022

## Platform Notes (Continued)

```
pages_to_scan      4096
scan_sleep_millisecs 10000
```

```
-----  
19. OS release  
From /etc/*-release /etc/*-version  
os-release SUSE Linux Enterprise Server 15 SP4
```

```
-----  
20. Disk information  
SPEC is set to: /home/ljqq  
Filesystem      Type   Size  Used Avail Use% Mounted on  
/dev/nvme0n1p3  btrfs  854G  195G  658G  23%  /home
```

```
-----  
21. /sys/devices/virtual/dmi/id  
Vendor:          Nettrix  
Product:         R620 G50  
Product Family:  Rack  
Serial:          6101810603447822
```

```
-----  
22. dmidecode  
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the  
"DMTF SMBIOS" standard.  
Memory:  
 11x Samsung M321R8GA0BB0-CQKEG 64 GB 2 rank 4800  
 5x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800
```

```
-----  
23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor:      American Megatrends International, LLC.  
BIOS Version:     NNH1041018-U00-1  
BIOS Date:        11/01/2022  
BIOS Revision:    5.29
```

## Compiler Version Notes

```
=====| 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
| 657.xz_s(base, peak)
```

```
-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

```
=====| 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
| 641.leela_s(base, peak)
```

```
-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Nettrix**

R620 G50 (Intel Xeon Gold 6426Y, 2.50 GHz)

**SPECspeed®2017\_int\_base = 15.5**

**SPECspeed®2017\_int\_peak = 15.8**

**CPU2017 License:** 6138

**Test Date:** Mar-2023

**Test Sponsor:** Nettrix

**Hardware Availability:** Jan-2023

**Tested by:** Nettrix

**Software Availability:** Dec-2022

## Compiler Version Notes (Continued)

Fortran | 648.exchange2\_s(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -fsto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC\_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:

-m64 -std=c++14 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-fsto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

R620 G50 (Intel Xeon Gold 6426Y, 2.50 GHz)

SPECspeed®2017\_int\_base = 15.5

SPECspeed®2017\_int\_peak = 15.8

CPU2017 License: 6138

Test Sponsor: Nettrix

Tested by: Nettrix

Test Date: Mar-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -fsto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)  
-fsto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-fopenmp -DSPEC_OPENMP -fno-strict-overflow  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)  
-fsto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-fopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

R620 G50 (Intel Xeon Gold 6426Y, 2.50 GHz)

SPECspeed®2017\_int\_base = 15.5

SPECspeed®2017\_int\_peak = 15.8

CPU2017 License: 6138

Test Date: Mar-2023

Test Sponsor: Nettrix

Hardware Availability: Jan-2023

Tested by: Nettrix

Software Availability: Dec-2022

## Peak Optimization Flags (Continued)

605.mcf\_s: basepeak = yes

```
625.x264_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3
-ffast-math -futto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz\_s: basepeak = yes

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: basepeak = yes

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V1.3-SPR-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V1.3-SPR-revA.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2022-04-29 08:39:18-0400.

Report generated on 2024-01-29 17:31:53 by CPU2017 PDF formatter v6716.

Originally published on 2023-04-11.